

Catalog



Avigilon Product Catalog

Video security and access control solutions

The first and only mission-critical ecosystem

Motorola Solutions is solving for safer. We build and connect technologies to help protect people, property and places. Our solutions enable the collaboration between public safety agencies and enterprises that's critical for a proactive approach to safety and security. Voice, video and data are unified, so information flows, operations run and collaboration improves to help strengthen safety everywhere.



An aerial photograph of a public waterfront area. In the foreground, a body of water is visible. Along the shore, there are several rows of wooden benches. People are sitting on the benches, some talking, some looking at their phones. A few people are walking on the paved path between the benches. In the background, there's a red umbrella with the text "CITY WINERY" on it. The overall scene is a busy, public outdoor space.

Video security & access control

Know what is happening. Act with certainty.

Our expansive portfolio of cameras, access control, infrastructure and management software is combined with powerful, AI-enabled analytics that take your security system from passive observer to active partner.

With high-definition cameras that continuously scan, analyze and learn from their environment, you get unprecedented visual detail combined with situational awareness to inform the best response.

Investigations that once took hours or days, now take minutes with advanced search capabilities and integrations across the ecosystem that enable effortless sharing and collaboration.

At Motorola Solutions, we create a safer world.



Risk grows in the gaps


Solutions for commercial business

The lack of visibility to what's happening in your business creates inefficiencies, leads to poor decision-making and allows risk to thrive. We're shaping the future of business with an adaptable network of cameras with built-in intelligence to bring forward the information enterprise needs to do its work.

Fixed and mobile security solutions capture the critical details that our integrated analytics platform scans to identify the relevant

information to share across the organization.

When analytics work for you to identify patterns, hotspots and unusual activities, you have the knowledge to protect your business and grow. Our vision is to turn the masses of data that video networks capture into a powerful engine of unprecedented insights and data-driven decision making. So resources are better deployed, performance is driven, and risk is removed.



Contents



Unity Cameras & Sensors

6

Camera Lines Overview	7
H6A Dome Cameras	8
H6A Bullet Cameras	9
H6X Dome & Box Cameras	10
H6X Bullet Cameras	11
H6A PTZ Cameras	12
Unity H6SL Cameras	13
H6 Mini Dome Cameras	14
H5 Pro Cameras	15
Unity H5A Multisensor Cameras	16
H5A Fisheye Cameras	17
H5A Corner Cameras	18
H5A Dual Head Cameras	19
Unity H5A Modular Cameras	20
H5A PTZ Cameras	21
H5A IR PTZ Cameras	22
H5A Thermal Cameras	23
H5M Cameras	24
H4 Video Intercom	25
HALO Smart Sensor	26
FIPS Cryptography Support	27
Fixed Camera Accessories	28



Alta Cameras

32

Ava Flex Camera	33
Ava Compact Dome Camera	34
Ava Dome Camera	35
Ava Bullet Camera	36
Ava 360 Camera	37
Alta H6SL Cameras	38
Alta H5A Multisensor Cameras	39
Alta H5A Modular Cameras	40
Alta Camera Accessories	41



Video Infrastructure

43

AI NVR 2	44
NVR6	45
Workstations	46
NVR6 FIPS	47
ENVR2 PLUS Appliance	48
HD Video Appliance 3X	49
Avigilon Video Archive	50
AI Appliance 2	51
IP Horn Speaker	52
Alta Cloud Connectors	53



Body-worn Cameras

54

VT100 Cameras	55
VB400 Cameras	56
Body-worn Accessories	57
Body-worn Camera Docks	58
RFID Reader & Accessories	59
DockController	60



Motorola Solutions Integrations

61

Concealed Weapons Detection	62
Orchestrate	63
Rave Mobile Safety	64
Rave Panic Button	65
Rave Alert	66



LPR Solutions

67

VehicleManager Enterprise	68
L6A Enterprise LPR Camera	69
H4 License Plate Capture Cameras	70
L6Q LPR Camera System	71



Video Management Software

72

Avigilon Unity Video	73
Avigilon Unity Cloud Services	75
Avigilon Decision Management System	76
Smart Assurance Plan	77
VideoManager Software	78
Avigilon Alta Video	79



Unity Access Control

80



Avigilon Unity Access Solutions	81
Unity Access Licensing	82
Unity Access System	83
Controllers & Sub-Panels	84
Readers & Credentials	85
Power Supplies	89
Wireless Lock Integrations	90
Federal Government Solutions	93
Biometric Solutions	94
Visitor Management	95
Intrusion Panels Integration	96



Alta Access Control

97

Avigilon Alta Access	98
Avigilon Smart Reader	99
Avigilon Smart Keypad Reader	100
Avigilon Embedded USB Smart Reader	101
Avigilon Video Reader Pro	102
Avigilon Video Intercom Reader Pro	103
Avigilon Core Series Smart Hubs	104
Avigilon Single Door Controller	106
Avigilon Access Control Core	107
Avigilon Expansion Boards	108
Avigilon Alta Wireless Lock Integrations	109
Avigilon Alta Low & High Frequency Credentials	110



Unity Cameras & Sensors

The Motorola Solutions Avigilon Unity on-premise portfolio offers a complete video security solution, with cutting-edge camera and sensor technologies that are embedded with features such as smart analytics to help focus your attention on the events that matter most. Our fixed camera portfolio includes cameras and technologies for any application, from 1–61 MP resolution in fixed, moving and multisensor options, to infrared (IR) and LightCatcher™ technology to help you see more in dark environments, to a 360-degree view for broad coverage with fewer cameras.



Avigilon Unity Camera Lines Overview

Available in four distinct camera lines, Avigilon Unity cameras are designed to meet you where you stand. Achieve the level of image detail you need and leverage the cameras' built-in analytic capabilities to address the unique challenges of your site.



MODEL NAME	H6A/H6X CAMERAS	H5A CAMERAS	H6SL CAMERAS	H6M CAMERAS	H5M CAMERAS
Summary	Future-proof your most critical sites with our most advanced cameras, delivering the latest cutting-edge analytics and imaging technology for unparalleled situational awareness.	Secure your site with powerful cameras that offer our core analytics and unique form factors to help solve your various safety and operational needs.	Combine versatility and high performance with these all-purpose cameras that can take on an extensive range of indoor and outdoor applications, including general security monitoring needs.	Start protecting your people and property in minutes with this indoor, no-frills camera that provides optimal protection in a discreet design.	Designed for sites that want outdoor monitoring without advanced analytics, this value camera is up for the challenge with easy installation and a tough exterior.
Form factors	Dome Short & Long Bullet Box PTZ	Panoramic PTZ / IR PTZ Thermal Corner Modular	Dome Bullet	Dome	Dome
Analytic capabilities	Classified Object Detection Unusual Activity Detection Visible Firearm Detection (U.S. only) Crowd Detection Audio Analytics (dome and bullet only) Dynamic Privacy Masking Vehicle Subclass Alerts Person Crawling Detection Appearance Search Support Facial Recognition support	Classified Object Detection Unusual Activity Detection Appearance Search support Facial Recognition support	Classified Object Detection Unusual Activity Detection Appearance Search support* Facial Recognition support*	Classified Object Detection Unusual Activity Detection Appearance Search support* Facial Recognition support*	Unusual Motion Detection
Analytic detection distance	Long range	Long to short range (will vary with camera)	Mid range	Short range	Short range
Resolutions	2 through 8 MP	2 through 8 MP	2, 3, 5, 8 MP	2, 3, 5 MP	2, 5 MP
Image quality	Best	Excellent	Great	Good	Good
IR distance	Long range	Long to short range (will vary with camera)	Mid range	Short range	Short range
Lens options	Longer varifocal CS/ICS (box only)	Shorter varifocal	Shorter varifocal	Fixed	Fixed
	Signed and encrypted firmware Vulnerability scans Built-in TPM Secure Boot	Signed and encrypted firmware	Signed and encrypted firmware Vulnerability scans Built-in TPM Secure Boot	Signed and encrypted firmware Vulnerability scans	Signed and encrypted firmware
Environmental	Impact resistant NEMA 4X NEMA TS2 Indoor and outdoor variants	Impact resistant Indoor and outdoor variants	Impact resistant Indoor and outdoor variants	Indoor variants	Impact resistant Outdoor variants
Operating temperature	Wide range	Wide range	Mid range	Limited range	Mid range

* Coming late 2024

Need help with choosing? [Connect with our team of experts today.](#)



H6A Dome Cameras

Elevate your situational awareness to new heights with this powerful line of cameras that can run multiple edge-based analytics simultaneously.



Specifications

MODEL NAME	INDOOR DOME		OUTDOOR DOME	
Part Number	2.0C-H6A-D1	6.0C-H6A-D1	2.0C-H6A-DO1	6.0C-H6A-DO1
	2.0C-H6A-D2	6.0C-H6A-D2	2.0C-H6A-DO2	6.0C-H6A-DO2
	2.0C-H6A-D1-IR	6.0C-H6A-D1-IR	2.0C-H6A-DO1-IR	6.0C-H6A-DO1-IR
	2.0C-H6A-D2-IR	6.0C-H6A-D2-IR	2.0C-H6A-DO2-IR	6.0C-H6A-DO2-IR
	4.0C-H6A-D1	8.0C-H6A-D1	4.0C-H6A-DO1	8.0C-H6A-DO1
	4.0C-H6A-D2	8.0C-H6A-D2	4.0C-H6A-DO2	8.0C-H6A-DO2
	4.0C-H6A-D1-IR	8.0C-H6A-D1-IR	4.0C-H6A-DO1-IR	8.0C-H6A-DO1-IR
	4.0C-H6A-D2-IR	8.0C-H6A-D2-IR	4.0C-H6A-DO2-IR	8.0C-H6A-DO2-IR
Resolution	2 MP, 4 MP, 6 MP, 8 MP			
Image Sensor	2 MP: 1/2.8" progressive scan CMOS 4 / 6 / 8 MP: 1/1.8" progressive scan CMOS			
Max. Dynamic Range (dB)	2 MP: 130 dB, 4 MP: 120 dB, 6 MP: 144 dB, 8 MP: 144 dB			
Max. Image Rate (50 Hz/60 Hz)	2 MP: 50 fps/60 fps, 4 MP: 50 fps/60 fps, 6 MP: 25 fps/30 fps, 8 MP: 25 fps/30 fps			
Environmental	IK10		IK11, IP66/67/68, NEMA Type 4X, NEMA TS2	
LENS & IR ILLUMINATION	2.8-12 MM LENS		4.4-9.3 MM LENS	
Max. IR Illumination Distance (high power 850 nm LEDs)	50 m (164 ft) full tele 25 m (82 ft) full wide		50 m (164 ft) full tele 25 m (82 ft) full wide	
	70 m (230 ft) full tele 40 m (131 ft) full wide			
Min. Illumination (at 33 ms shutter speed)	2 MP	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.01 lux in color mode	N/A	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode
	4 MP	N/A	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.008 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode
	6 MP	N/A	With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode
	8 MP	N/A	With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode
Horizontal Field of View (H) & Vertical Field of View (V) (16:9)	2 MP	27° – 119° (H), 15° – 64° (V)	N/A	11° – 30° (H), 6° – 16.5° (V)
	4 MP	N/A	47° – 111° (H), 26° – 57° (V)	15° – 42° (H), 9° – 23° (V)
	6 MP	N/A	47° – 109° (H), 26° – 57° (V)	15° – 42° (H), 9° – 23° (V)
	8 MP	N/A	47° – 109° (H), 26° – 57° (V)	15° – 42° (H), 9° – 23° (V)

Key features

	Video Analytics		Audio Analytics
	Camera-based Visible Firearm Detection analytics ¹		Optional IR Illumination
	Conformant with ONVIF® Profile S, T, G and M		FIPS-Compliant Cryptography Available ¹ Integrated TPM & Secure Boot
	H.264 & H.265 HDSM SmartCodec™ Technology, Motion JPEG		

Audio, power & storage

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA
External Power Source	12-24 VDC +/-10%
PoE Power Source	PoE: IEEE 802.3af Class 3 PoE+: IEEE 802.3at Class 4
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

¹ Additional license required – see page 27.

Learn more





H6A Bullet Cameras

Elevate your situational awareness to new heights with this powerful line of cameras that can run multiple edge-based analytics simultaneously.

Specifications



MODEL NAME		SHORT BULLET		LONG BULLET			
Part Number		2.0C-H6A-B01-IR 4.0C-H6A-B01-IR 6.0C-H6A-B01-IR 8.0C-H6A-B01-IR		2.0C-H6A-B02-IR 4.0C-H6A-B02-IR 6.0C-H6A-B02-IR 8.0C-H6A-B02-IR			
Resolution		2 MP, 4 MP, 6 MP, 8 MP					
Image Sensor		2 MP: 1/2.8" progressive scan CMOS 4 / 6 / 8 MP: 1/1.8" progressive scan CMOS					
Max. Dynamic Range (dB)		2 MP: 130 dB, 4 MP: 120 dB, 6 MP: 144 dB, 8 MP: 144 dB					
Max. Image Rate (50 Hz/60 Hz)		2 MP: 50 fps/60 fps, 4 MP: 50 fps/60 fps, 6 MP: 25 fps/30 fps, 8 MP: 25 fps/30 fps					
Environmental		IK10, IP66/67/68, NEMA Type 4X, NEMA TS2					
LENS & IR ILLUMINATION		2.8-12 MM LENS (SHORT BULLET ONLY)		4.4-9.3 MM LENS (SHORT BULLET ONLY)		4.5-148.5 MM & 6.9-214.6 MM LENSES (LONG BULLET ONLY)	
Max. IR Illumination Distance (high power 850 nm LEDs)		50 m (164 ft), full tele 30 m (98 ft), full wide		70 m (229 ft), full tele 30 m (131 ft), full wide		170m (558 ft), full tele 40m (131ft), full wide	
Min. Illumination (at 33 ms shutter speed)	2 MP	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.01 lux in color mode		N/A		With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode	
	4 MP	N/A		With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.008 lux in color mode		With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode	
	6 MP	N/A		With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode		With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode	
	8 MP	N/A		With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode		With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode	
Horizontal Field of View (H) & Vertical Field of View (V) (16:9)	2 MP	27° – 119° (H), 15° – 64° (V)		N/A		3.4° – 61° (H), 1.9° – 37° (V)	
	4 MP	N/A		47° – 111° (H), 26° – 57° (V)		2.9° – 62.5° (H), 1.6° – 36° (V)	
	6 MP	N/A		47° – 109° (H), 26° – 57° (V)		2.9° – 62.5° (H), 1.6° – 36° (V)	
	8 MP	N/A		47° – 109° (H), 26° – 57° (V)		2.9° – 62.5° (H), 1.6° – 36° (V)	

Key features



Video Analytics



Audio Analytics



Camera-based Visible
Firearm Detection analytics¹



Optional IR Illumination



Conformant with ONVIF®
Profile S, T, G and M



FIPS-Compliant Cryptography
Available¹ Integrated TPM &
Secure Boot



H.264 & H.265 HDSM
SmartCodec™ Technology,
Motion JPEG

Audio, power & storage

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA
External Power Source	12-24 VDC +/-10%
PoE Power Source	PoE: IEEE 802.3af Class 3 PoE+: IEEE 802.3at Class 4
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

¹ Additional license required – see page 27.

Learn more





H6X Dome & Box Cameras

Easily meet certain privacy requirements with this flexible line of cameras that features H6A capabilities, but have been designed with no built-in mic for effortless compliance.

Specifications



MODEL NAME	INDOOR / OUTDOOR DOME		BOX	
Part Number	4.0C-H6X-DO1-IR 4.0C-H6X-DO2-IR	8.0C-H6X-DO1-IR 8.0C-H6X-DO2-IR	2.0C-H6X-B 4.0C-H6X-B	6.0C-H6X-B 8.0C-H6X-B
Resolution	4 MP, 6 MP, 8 MP		2 MP, 4 MP, 6 MP, 8 MP	
Image Sensor	1/1.8" progressive scan CMOS		2 MP : 1/2.8" progressive scan 4 MP / 6 MP / 8 MP : 1/1.8" progressive scan CMOS	
Max. Dynamic Range (dB)	4 MP : 120 dB 6 MP / 8MP : 144 dB		2 MP : 150 dB 4 MP / 6 MP / 8 MP: 144 dB	
Max. Image Rate (50 Hz/60 Hz)	4 MP : 50 fps/60 fps 6 MP / 8MP : 25 fps/30 fps		2 MP / 4 MP : 50 fps/60 fps 6 MP / 8MP : 25 fps/30 fps	
Environmental	IK10 IK11, IP66/67/68, NEMA Type 4X, NEMA TS2		N/A	

LENS & IR ILLUMINATION	4.4-9.3 MM LENS (DOME)	10.9-29 MM LENS (DOME)	MULTIPLE LENS OPTIONS (BOX ONLY)
Max. IR Illumination Distance (high power 850 nm LEDs)	50 m (164 ft) full tele 25 m (82 ft) full wide	70 m (230 ft) full tele 40 m (131 ft) full wide	N/A
Min. Illumination (at 33 ms shutter speed)	2 MP N/A	N/A	0.01 lux in color mode, 0.003 lux in mono mode at f/1.4
	4 MP With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.008 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode	0.008 lux in color mode, 0.003 lux in mono mode at f/1.3
	6 MP With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode	0.02 lux in color mode, 0.006 lux in mono mode at f/1.3
	8 MP With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode	0.02 lux in color mode, 0.006 lux in mono mode at f/1.3
Horizontal Field of View (H) & Vertical Field of View (V) (16:9)	4 MP 47° – 111° (H), 26° – 57° (V)	15° – 42° (H), 9° – 23° (V)	N/A
	6 MP 47° – 109° (H), 26° – 57° (V)	15° – 42° (H), 9° – 23° (V)	N/A
	8 MP 47° – 109° (H), 26° – 57° (V)	15° – 42° (H), 9° – 23° (V)	N/A

Key features



Video Analytics



Optional IR Illumination



Camera-based Visible
Firearm Detection analytics¹



FIPS-Compliant Cryptography
Available¹ Integrated TPM &
Secure Boot



Conformant with ONVIF®
Profile S, T, G and M



H.264 & H.265 HDSM
SmartCodec™ Technology,
Motion JPEG


Learn
more




Dome



Box



Dome



Box



Audio, power & storage

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA
External Power Source	12-24 VDC +/-10%
PoE Power Source	PoE: IEEE 802.3af Class 3 PoE+: IEEE 802.3at Class 4
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

¹ Additional license required – see page 27.



H6X Bullet Cameras

Easily meet certain privacy requirements with this flexible line of cameras that features H6A capabilities, but have been designed with no built-in mic for effortless compliance.

Specifications



MODEL NAME	SHORT BULLET	LONG BULLET
Part Number	4.0C-H6X-B01-IR 8.0C-H6X-B01-IR	4.0C-H6X-B02-IR 8.0C-H6X-B02-IR
Resolution	4 MP, 8 MP	
Image Sensor	1/1.8" progressive scan CMOS	
Max. Dynamic Range (dB)	4 MP : 120 dB 8 MP : 144 dB	
Max. Image Rate (50 Hz/60 Hz)	4 MP : 50 fps/60 fps 8 MP : 25 fps/30 fps	
Environmental	IK10, IP66/67/68, NEMA Type 4X, NEMA TS2	

LENS & IR ILLUMINATION		4.4-9.3 MM LENS (SHORT BULLET)	4.5-148.5 MM & 6.9-214.6 MM LENSES (LONG BULLET ONLY)
Max. IR Illumination Distance (high power 850 nm LEDs)		70 m (229 ft), full tele 30 m (131 ft), full wide	170m (558 ft), full tele 40m (131ft), full wide
Min. Illumination (at 33 ms shutter speed)	4 MP	With IR: 0 lux in mono mode Without IR: 0.003 lux in mono mode; 0.008 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.004 lux in mono mode; 0.01 lux in color mode
	8 MP	With IR: 0 lux in mono mode Without IR: 0.006 lux in mono mode; 0.02 lux in color mode	With IR: 0 lux in mono mode Without IR: 0.008 lux in mono mode; 0.03 lux in color mode
Horizontal Field of View (H) & Vertical Field of View (V) (16:9)	4 MP	47° – 111° (H), 26° – 57° (V)	2.9° – 62.5° (H), 1.6° – 36° (V)
	8 MP	47° – 109° (H), 26° – 57° (V)	2.9° – 62.5° (H), 1.6° – 36° (V)

Key features

- Video Analytics
- Optional IR Illumination
- Camera-based Visible Firearm Detection analytics¹
- FIPS-Compliant Cryptography Available¹ Integrated TPM & Secure Boot
- Conformant with ONVIF® Profile S, T, G and M
- H.264 & H.265 HDSM SmartCodec™ Technology, Motion JPEG

Learn more



Audio, power & storage

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	1 x Relay In, 1 x Relay Out, 1 x 12 VDC out at 50 mA
External Power Source	12-24 VDC +/-10%
PoE Power Source	PoE: IEEE 802.3af Class 3 PoE+: IEEE 802.3at Class 4
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

¹ Additional license required — see page 27.



H6A PTZ Cameras

Cover large areas, proactively detect incidents and capture fast-moving objects with this powerful indoor and outdoor PTZ.

Specifications



MODEL NAME	INDOOR IN-CEILING	INDOOR/OUTDOOR PENDANT
Part Number	2.0C-H6A-PTZ-DC30 4.0C-H6A-PTZ-DC30	2.0C-H6A-PTZ-DP30 4.0C-H6A-PTZ-DP30
Resolution	2 MP, 4 MP	
Image Sensor	1/1.8" progressive scan CMOS	
Max. Dynamic Range (dB)	122 dB	
Max. Image Rate (50 Hz/60 Hz)	2 MP : 50 fps/60 fps, 4 MP : 25 fps/30 fps	
Environmental	IK09	IK09/10, IP66/67, NEMA Type 4X, NEMA TS2
LENS & IR ILLUMINATION	6.5 mm to 162.5 mm, F/1.6 – F/4.8	
Horizontal Field of View (H) & Vertical Field of View (V)	58.1 x 34.8 (H), 2.3 x 1.4 (V)	
Zoom	30x Enhanced Optical	
Lens Control	Remote Zoom and Focus, Autofocus, IR Cut Filter, Auto Iris	

Key features

Video Analytics with Auto-Tracking

Up to 30x zoom

Wide Dynamic Range Support

Conformant with ONVIF® Profile S, T, G and M

H.264 & H.265 HDSM SmartCodec™ Technology, Motion JPEG

FIPS-Compliant Cryptography Available¹, Integrated TPM & Secure Boot

Learn more



Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz
Audio Input/Output	Full Duplex Line level input and output
External I/O Terminals	3x Alarm In (3.5VDC/3.5mA MAX), 1x NO Relay Out (32VDC/150mA MAX), 1x Digital Out (13VDC MAX), 1x 12VDC source (11~13VDC/140 mA MAX)
External Power Source	Aux 24 VDC/VAC +/- 10%
PoE Power Source	In-ceiling: <ul style="list-style-type: none">• IEEE 802.3 at Type 2, Class 4 compliant Pendant: <ul style="list-style-type: none">• IEEE 802.3at Type 2, Class 4 compliant• IEEE802.3bt Type 3, Class 6 compliant• IEEE802.3bt Type 4, Class 8 compliant
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended.

¹ Additional license required – see page 27.



Unity H6SL Cameras

Protect people and property effortlessly with this versatile, analytics-enabled camera line that can fit into an extensive range of indoor and outdoor applications.

Specifications



MODEL NAME	INDOOR DOME		OUTDOOR DOME		BULLET	
Part Number	2.0C-H6SL-D1 2.0C-H6SL-D1-IR 3.0C-H6SL-D1	3.0C-H6SL-D1-IR 5.0C-H6SL-D1 5.0C-H6SL-D1-IR	2.0C-H6SL-D01 2.0C-H6SL-D01-IR 3.0C-H6SL-D01 3.0C-H6SL-D01-IR	5.0C-H6SL-D01 5.0C-H6SL-D01-IR 8.0C-H6SL-D01-IR	2.0C-H6SL-B01-IR 3.0C-H6SL-B01-IR 3.0C-H6SL-B02-IR	5.0C-H6SL-B01-IR 5.0C-H6SL-B02-IR 8.0C-H6SL-B01-IR
Resolution	2 MP, 3 MP, 5 MP, 8 MP					
Image Sensor	1/2.8" progressive scan CMOS					
Max. Dynamic Range (dB)	2 MP: 126 dB, 3 MP: 130 dB, 5 MP: 130 dB, 8 MP: 130 dB					
Max. Image Rate (50 Hz/60 Hz)	2 MP: 50 fps/60 fps, 3 MP: 25 fps/30 fps, 5 MP: 25 fps/30 fps, 8 MP: 25 fps/30 fps					
Environmental	IK10		IK10, IP66/67, Type 4X		IK10, IP66/67, Type 4X	
LENS & IR ILLUMINATION		3.4-10.5 MM LENS (DOME)	3.4-10.5 MM LENS (BULLET)	10.9-29 MM LENS (BULLET ONLY)	4.4-9.3 MM LENS (BULLET ONLY)	
Max. IR Illumination Distance (high power 850 nm LEDs)	2 MP	30 m (100 ft), full tele 20 m (65 ft), full wide	50 m (164 ft), full tele 30 m (100 ft), full wide	N/A	N/A	
	3 MP	30 m (100 ft), full tele 20 m (65 ft), full wide	40 m (131 ft), full tele 20 m (65 ft), full wide	70 m (230 ft), full tele 30 m (100 ft), full wide	N/A	
	5 MP	30 m (100 ft), full tele 20 m (65 ft), full wide	40 m (131 ft), full tele 20 m (65 ft), full wide	70 m (230 ft), full tele 30 m (100 ft), full wide	N/A	
	8 MP	N/A		N/A	50 m (164 ft), full tele 30 m (100 ft), full wide	
Min. Illumination (at 33 ms shutter speed)	2 MP	With IR: 0 lux in mono Without IR: 0.01 lux in color; 0.005 lux in mono		N/A	N/A	
	3 MP	With IR: 0 lux in mono Without IR: 0.04 lux in color; 0.02 lux in mono			N/A	
	5 MP	With IR: 0 lux in mono Without IR: 0.04 lux in color; 0.02 lux in mono			N/A	
	8 MP	N/A		N/A	With IR: 0 lux in mono Without IR: 0.02 lux in color; 0.01 lux in mono	
Horizontal Field of View (H) & Vertical Field of View (V)	2 MP	101° - 31° (H), 53° - 17° (V)		N/A	N/A	
	3 MP	95° - 28° (H), 69° - 21° (V)		28° - 10° (H), 21° - 7° (V)	N/A	
	5 MP	95° - 28° (H), 69° - 21° (V)		28° - 10° (H), 21° - 7° (V)	N/A	
	8 MP	N/A		N/A	103° - 47° (H), 54° - 26° (V)	

Key features



Video Analytics



Optional IR Illumination



Wide Dynamic Range



Conformant with ONVIF® Profile S, T, G and M



H.264 & H.265 HDSM SmartCodec™ Technology, Motion JPEG



FIPS-Compliant Cryptography Available¹ Integrated TPM & Secure Boot

Learn more



Bullet



Dome



Audio, power & storage

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	Alarm In, Alarm Out
Microphone	Optional microphone accessory sold separately (Indoor Dome model only)
PoE Power Source	IEEE 802.3af Class 3 compliant, 12VDC Aux (Bullet only)
Onboard Storage	microSD/microSDHC/microSDXC slot – video speed class card required. Class V10 or better recommended.

¹ Additional license required – see page 27.



H6 Mini Dome Camera

Protect indoor spaces with this small yet mighty camera that combines high-quality images of up to 5 MP, a wide field of view and efficient bandwidth management in a compact design.



Specifications

MODEL NAME	2 MP H6 MINI DOME	3 MP H6 MINI DOME	5 MP H6 MINI DOME
Part Number	2.0C-H6M-D1-IR 2.0C-H6M-D1	3.0C-H6M-D1-IR 3.0C-H6M-D1 3.0C-H6M-D2-IR	5.0C-H6M-D1-IR 5.0C-H6M-D2-IR
Resolution	2.0 MP	3.0 MP	5.0 MP
Image Sensor	1/2.8 “ Progressive Scan CMOS		
Max. Dynamic Range (dB)	WDR Off: 100 dB WDR On: 120 dB		
Max. Image Rate	(50 Hz/60 Hz): 25 fps/30 fps		
Environmental	N/A		
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)		
LENS & IR ILLUMINATION	2 MP H6 MINI DOME	3 MP H6 MINI DOME	5 MP H6 MINI DOME
Lens	2.95 mm fixed	D1: 2.95 mm fixed D2: 2.4 mm fixed	
IR Illumination (high power 850 nm LEDs)	10 m (33 ft) max. distance at 0 lux		
Horizontal Field of View (HFOV)	(16:9) 108°	D1: 100° D2: 123°	
Vertical Field of View (VFOV)	(16:9) 61°	D1: (4:3) 75° 16:9) 54° D2: (4:3) 93° (16:9) 69°	
Min. Illumination	With IR: 0 Without IR: 0.005 lux in mono mode; 0.01 lux in color mode	With IR: 0 Without IR: 0.01 lux in mono mode; 0.02 lux in color mode	

Key features

- 

Video Analytics
- 

Wide Field of View
- 

Wide Dynamic Range Support
- 

Conformant with ONVIF® Profile S, T and G
- 

FIPS-Compliant Cryptography Available¹
- 

H.264 & H.265 HDSM SmartCodec™ Technology, Motion JPEG
- 

Quick & Easy Installation
- 

Optional IR Illumination

Learn more



Audio, power & storage

Audio Input/Output	N/A
External I/O Terminals	N/A
Power Consumption	6 W
Power Source	PoE: IEEE 802.3af Class 2 compliant
Onboard Storage	microSD/microSDHC/microSDXC slot – video speed class card required. Class V10 or better recommended.

¹ Additional license required – see page 27.

H5 Pro Cameras

The Avigilon H5 Pro Camera Line captures the best-in-class image details over vast areas, providing maximum coverage options through our most powerful and innovative ultra high definition cameras yet.



Specifications

Model Name	8 MP (4K ULTRA HD) H5 PRO	16 MP H5 PRO	26 MP H5 PRO	40 MP H5 PRO	61 MP H5 PRO
Part Number	8C-H5PRO-B	16C-H5PRO-B	26C-H5PRO-B	40C-H5PRO-B	61C-H5PRO-B
Resolution	8 MP (4K)	16 MP (5K)	26 MP (6K)	40 MP (8K)	61 MP (10K)
Image Sensor (progressive scan CMOS)	27.2 mm (Type 1.8)			43.3 mm (Type 2.7)	
Max. Dynamic Range	WDR Off: 25 fps / 24fps WDR On: 16.7 fps / 17.1 fps			WDR Off: 70 dB WDR On: 120 dB	
Max. Image Rate (50 Hz / 60 Hz)				16:9: 16.7 fps / 17.1 fps 3:2: 14.3 fps / 15 fps	
	WDR Off: 10 fps WDR On: 8.3 fps / 8.6 fps		3:2: 7 fps 16:9: 8.3 fps / 8.6 fps		
Max. IR Illumination Distance	–				
Environmental	IP66 rating for water resistance with optional appropriate housing				
Lens	Dependent on selected lens capability – see page 28 for lens options				

Key features

- Video Analytics¹
- Unusual Activity Detection¹
- Avigilon Appearance Search Technology¹
- Facial Recognition Technology¹
- FIPS-Compliant Cryptography Available²
- Conformant with ONVIF[®] Profile S, T¹ and G
- Extended Temperature Range
- H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG
- LightCatcher Technology
- Wide Dynamic Range
- Audio Recording Capabilities³
- No Face Mask Detection & Occupancy Counting¹

Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz
Audio Input/Output	Line level I/O, A/V mini-jack (3.5mm)
External I/O Terminals	Alarm in, alarm out
External Power Source	VDC: 12 V ± 10%, 18 W; VAC: 24 V ± 10%, 21 VA
PoE Power Source	IEEE802.3at Class 4 compliant
Onboard Storage	2x microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended.

¹ Not available on H5 Pro 61 MP models.

² Additional license required – see page 27.

³ Optional.

Learn more





Unity H5A Multisensor Cameras









Ensure your site is covered from all angles by combining AI-powered video analytics and three or four adjustable sensors into one powerful solution.



Specifications

Model Name	3-SENSOR		4-SENSOR
Part Number	9C-H5A-3MH 15C-H5A-3MH 24C-H5A-3MH		12C-H5A-4MH 20C-H5A-4MH 32C-H5A-4MH
Resolution (total / per sensor)	9 MP / 3 MP 15 MP / 5 MP 24 MP / 8 MP		12 MP / 3 MP 20 MP / 5 MP 32 MP / 8 MP
Image Sensor	1/2.8" CMOS		
Dynamic Range	WDR On: 120 dB, WDR Off: 80 dB		
Max. Image Rate (high frame rate mode; per sensor; 60 Hz / 50 Hz)	3 MP: 60 / 50 fps 5 MP: 40 / 33 fps 8 MP: 24 / 25 fps		3 MP: 40 / 33 fps 5 MP: 30 / 25 fps 8 MP: 20 / 20 fps
Environmental	IK10, IP66/67, NEMA 250 Type 4X, NEMA TS2		
LENS (PER SENSOR) & IR ILLUMINATION		3.3-5.7MM LENS	
	3 MP	5 MP	8 MP
Max. IR Illumination Distance (high power 850 nm LEDs)	30 m (98 ft) maximum distance at 0 lux when camera is mounted at 4 m (13 ft) off the ground		
Min. Illumination	0.020 lux (F1.5) in color mode 0.018 lux (F1.5) in mono mode 0 lux with optional IR illuminator	0.020 lux (F1.5) in color mode 0.018 lux (F1.5) in mono mode 0 lux with optional IR illuminator	0.020 lux (F1.5) in color mode 0.016 lux (F1.5) in mono mode 0 lux with optional IR illuminator
Lens and Horizontal Field of View Based on Aspect Ratio	53° - 97° (16:9) 53° - 99° (4:3)	53° - 97° (16:9) 53° - 99° (4:3)	58° - 106° (16:9) 43° - 74° (4:3)

Key features

-  Video Analytics
-  Optional IR Illumination
-  Conformant with ONVIF® Profile S, T, G and M
-  FIPS-Compliant Cryptography Available¹, Integrated TPM and Secure Boot
-  H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG
-  Rated IK10 for vandal resistance
-  Rated IP66/67 and NEMA 250 Type 4X for water, dust and corrosion resistance
-  Meets NEMA TS² standards for traffic monitoring applications

Learn more



Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz
Audio Input/Output	Line level input and output
External I/O Terminals	Alarm in, alarm out
External Power Source	24 VDC ± 10 %; 24 VAC rms ± 10 %, 50 or 60 Hz
PoE Power Source	In-Ceiling Mount: 30 W IEEE 802.3at Type 2 (PoE+) Surface and Pendant Mounts: With IR: 60 W (PoE++): IEEE 802.3bt Type 3, Cisco® UPoE or legacy high-power PoE Up to 35% IR Power or without IR: 30 W IEEE 802.3at Type 2 (PoE+)
Onboard Storage	Dual MicroSD/microSDHC/microSDXC slot - video speed class card required. Class V10 or better recommended. The dual SD cards will work as one contiguous region of storage.

¹ Additional license required — see page 27.



H5A Fisheye Cameras

Provides 360° panoramic views of large areas from a single vantage point. Offers superior situational awareness with no blind spots for a cost-effective solution, along with multiple mounting and accessory options for easy installation.



Specifications

MODEL NAME		SURFACE MOUNT DOME		IN-CEILING MOUNT INDOOR DOME	
Part Number	with Optional IR Illuminators	8.0C-H5A-FE-DO1	12.0W-H5A-FE-DO1	8.0C-H5A-FE-DC1	12.0W-H5A-FE-DC1
		8.0C-H5A-FE-DO1-IR	12.0W-H5A-FE-DO1-IR		
Resolution		8 MP	12 MP	8 MP	12 MP
Active Pixels		2048 x 2048	3008 x 3008	2048 x 2048	3008 x 3008
Image Sensor (progressive scan CMOS)		1/1.8"	1/2.3"	1/1.8"	1/2.3"
Max. Dynamic Range		120+ dB			
Max. Image Rate (50 Hz / 60 Hz)		25 fps / 30 fps			
Max. IR Illumination Distance (high power 850 nm LEDs, at 0 lux)		17 m (55 ft)	12 m (39 ft)	–	–
Environmental		IK10 Impact Rating, IP66 and IP67 Weather Rating		IP5X Rating	

LENS					
Fisheye, 1.4 mm, F/2.0	Field of View	360°	–	360°	–
	Minimum Illumination (color / mono)	With IR: 0 lux Without IR: (0.2 lux / 0.1 lux)	–	Without IR: (0.2 lux / 0.1 lux)	–
Fisheye, 1.6 mm, F/2.0	Field of View	–	360°	–	360°
	Minimum Illumination (color / mono)	–	With IR: 0 lux Without IR: (0.38 lux / 0.19 lux)	–	Without IR: (0.38 lux / 0.19 lux)

Key features

- Video Analytics
- Unusual Activity Detection
- Avigilon Appearance Search Technology
- Adaptive IR Technology²
- Wide Dynamic Range Support
- Conformant with ONVIF[®] Profile S, T and G
- FIPS-Compliant Cryptography Available¹
- H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG

Learn more



Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz
Audio Input/Output	Line level input and output and built-in microphone (can be enabled)
External I/O Terminals	Alarm in, alarm out
External Power Source	With IR: VDC: 12 V ±10%, 26 W min Without IR: VDC: 12 V ±10%, 11 W min
PoE Power Source	With IR: PoE+: IEEE 802.3at Class 4 Without IR: PoE: IEEE 802.3af Class 3
Onboard Storage	2 × microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended. Currently one of the two SD card slots is available for onboard storage.

¹ Additional license required – see page 27.

² Adaptive IR technology available on surface mount only.



H5A Corner Cameras

Anti-ligature, no-grip and vandal-resistant, the H5A Corner camera can handle the harshest attempts to destroy, detach, attach to or disable it in high-risk environments.



Specifications

Model Name		H5A CORNER, STAINLESS STEEL		H5A CORNER, COLD-ROLLED STEEL	
Part Number		R C-H5A-CR1-IR-SS		R C-H5A-CR1-IR	
Resolution R		3 MP5 MP		3 MP5 MP	
Image Sensor		1/2.8" progressive scan CMOS			
Max. Dynamic Range		WDR Off: 83 dB WDR On: 126 dB			
Max. Image Rate (50 Hz / 60 Hz)		WDR Off: 25 fps / 30 fps WDR On: 20 fps / 20 fps			
Max. IR Illumination Distance1 (high power 940 nm LED)		15 m (49 ft)			
Environmental		IP66 and IP67 Weather Rating, NEMA 4X Enclosure Rating, IK10+ Impact Rating		IP66 and IP67 Weather Rating, IK10+ Impact Rating	
LENS (Remote Zoom and Focus)					
3 - 9 mm, F1.3, P-Iris	Horizontal Angle of View (16:9 and 4:3)		34° – 105°		
	Vertical Angle of View (16:9 / 4:3)		19° – 57° / 26° – 77°		
	Minimum Illumination (color / mono)		0.027 lux in color mode, 0.014 lux in mono mode, 0 lux with IR		

Key features

Video Analytics	Unusual Activity Detection
Avigilon Appearance Search Technology	Facial Recognition Technology
Wide Dynamic Range Support	Conformant with ONVIF [®] Profile S, T and G
FIPS-Compliant Cryptography Available ²	H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG
Extended Temperature Range	Invisible IR LED Light

Learn more



Steel



White

Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz
Audio Input/Output	Line level I/O or built-in microphone
External I/O Terminals	Alarm In, Alarm Out
External Power Source	VDC: 12 V ± 10%, 12 W min; VAC: 24 V ± 10%, 13 VA min
PoE Power Source	IEEE802.3af Class 3 compliant
Onboard Storage	microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended.

¹IR illumination power may be reduced at higher operating temperatures.

² Additional license required – see page 27.

Part number varies based on camera resolution .



H5A Dual Head Cameras












The Avigilon H5A Dual Head Camera is a cost-effective and low profile dual-sensor camera that brings enhanced security to any site, by increasing coverage and minimizing blind posts for those hard to secure areas.



Specifications

MODEL NAME	SURFACE MOUNT DUAL HEAD CAMERA	
Part Number	R C -H5DH-DO1-IR	
Resolution R	6 MP (2x 3 MP)	10 MP (2x 5 MP)
Image Sensor	1/2.7" progressive scan CMOS	
Max. Dynamic Range	WDR Off: up to 82 dB, WDR On: up to 120 dB	
Max. Image Rate (50 Hz / 60 Hz)	Analytics ¹ : 24 fps / 25 fps High Frame Rate Mode: 30 fps / 25 fps	Analytics ¹ : 15 fps / 12.5 fps High Frame Rate Mode: 24 fps / 20 fps
Max. IR Illumination Distance ² (high power 850 nm LED)	Wide: 15 m (49 ft) , Tele: 30 m (98 ft)	
Environmental	UL/CSA/IEC 60950-22, IEC 62262 IK10 Impact Rating	
Lens	3.35-7.0 mm, F/1.93 remote focus and zoom	

Key Features

 Video Analytics	 Unusual Activity Detection
 Avigilon Appearance Search Technology	 Facial Recognition Technology
 Wide Dynamic Range Support	 Conformant with ONVIF [®] Profile S and T
 FIPS-Compliant Cryptography Available ³	 H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG
 Extended Temperature Range	 Invisible IR LED Light
 LightCatcher Technology	 Audio Recording Capabilities (Optional)

Learn more



Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz
Audio Input/Output	Line level I/O
External I/O Terminals	Alarm In, Alarm Out
External Power Source	13W max
PoE Power Source	IEEE802.3af Class 3 compliant
Onboard Storage	2 × microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended. Currently one of the two SD card slots is available for onboard storage.

¹ Maximum image rate with analytics enabled on all sensors.

² IR illumination power may be reduced at certain operating temperatures.

³ Additional license required – see page 27.

Part number varies based on camera resolution R.



Unity H5A Modular Cameras

The smallest Avigilon camera is designed for areas with limited space or that require a discreet monitoring solution.

Specifications: Imager Modules



MODEL NAME	RIGHT ANGLE IMAGER MODULE	MICRO BULLET IMAGER MODULE	
Part Number	3C-H5MOD-RP4	3C-H5MOD-MB2	5C-H5MOD-MB2
Resolution (MP)	3.0 MP	3.0 MP	5.0 MP
Image Sensor	1/2.7 " Progressive Scan		
Max. Dynamic Range (dB)	WDR Off: 82 dB WDR On: 120 dB		
Max. Image Rate	(50 Hz/60 Hz): 25 fps/30 fps		
Operating Temperature	-30 °C to +60 °C (-22 °F to 140 °F)		
Environmental	N/A	IP66 Weather Rating	
Lens	3.7 mm fixed pinhole aperture	2.8 mm fixed	
Horizontal Angle of View (HFOV)	92°	110°	
Vertical Angle of View (VFOV)	53°	80°	
Min. Illumination	0.1 lux		

Key features

	Video Analytics		Unusual Activity Detection
	Avigilon Appearance Search Technology		Facial Recognition Technology
	Wide Dynamic Range Support		Conformant with ONVIF® Profile S, T and G
	FIPS-Compliant Cryptography Available ¹		H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG

Learn more



* Based on 1x main unit + 1 x 3 MP imager module + 1 x 2m cable.
¹ Additional license required — see page 27.

Main Unit



MODEL NAME	MAIN UNIT	
Part Number	H5A-MOD-2P	
Max. Image Rate	High Frame Rate: (50 Hz/60 Hz)	(≤ 6 MP) 25 fps/30 fps (8 MP) 25 fps/24 fps (10 MP) 20 fps/24 fps
(Based on combined resolution of 1 or 2 imager modules)	Full Feature Mode: (50 Hz/60 Hz)	(≤ 5 MP) 25 fps/30 fps (6 MP) 25 fps/24 fps (8 MP) 20 fps/20 fps (10 MP) 12.5 fps/15 fps
Max. Dynamic Range	120 dB	
Operating Temperature	-10 °C to +60 °C (14 °F to 140 °F)	
Audio Compression Method	G.711 PCM 8 kHz, Opus	
Audio Input/Output	Line level input and output	
External I/O Terminals	Alarm In, Alarm Out	
Power Consumption	13 W Max	
Power Source	VDC: 12 V +/-10%, 11.5 W min PoE: IEEE 802.3af Class 3 compliant	
Onboard Storage	2 x microSD/microSDHC/microSDXC slots - video speed class card required. Class V10 or better recommended. One of the two SD card slots is available for onboard storage.	



H5A PTZ Cameras

Combines 360° views for wide area coverage and powerful 36x zoom for long range, evidentiary detail to help you monitor vast areas with ease.



Specifications

MODEL NAME	INDOOR IN-CEILING	INDOOR/OUTDOOR PENDANT
Part Number	8.0C-H5A-PTZ-DC36	8.0C-H5A-PTZ-DP36
Resolution	8 MP	
Image Sensor	1/2.5" Type "Exmor R" CMOS Sensor	
Optical Zoom	Image Stabilization Off: 36x, Image Stabilization On: 30x	
Pan	360°, endless, 300°/second	
Tilt	-10° to 90°, e-Flip, 300°/second	
Max. Dynamic Range	100 dB	
Max. Image Rate	30 fps	
Environmental	IK10	IK10, IP66/67, NEMA 4X

LENS (REMOTE ZOOM AND FOCUS)		
4.4 mm to 88 mm, F/2.0 – F/3.8	Horizontal Angle of View	69.7° – 2.2°
	Vertical Angle of View	42.8° – 1.3°
	Minimum Illumination (color / mono)	0.3 lux (F/2.0) in color mode, 0.09 lux (F/2.0) in mono

Key features

- Video Analytics with Auto-Tracking
- Unusual Activity Detection
- Wide Dynamic Range Support
- Conformant with ONVIF® Profile S, T and G
- FIPS-Compliant Cryptography Available¹
- H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG

Learn more



Audio, power & storage

Audio Compression Method	Opus, G.711
Audio Input/Output	Line level input/output
External I/O Terminals	2 alarm in, 2 alarm out
External Power Source	24 VDC ±10%; 24 VAC rms ±10%, 50 or 60 Hz
PoE Power Source	60 W PoE: IEEE 802.3bt Class 6 PoE++, 60 W Cisco UPoE, Microsemi 60 W or higher midspans 30 W PoE: IEEE 802.3bt, 802.3at Class 4 PoE+
Onboard Storage	2 × microSD/microSDHC/microSDXC slot – video speed class required. Class V10 or better recommended.



H5A IR PTZ Camera

See up to 300 meters in complete darkness with this high-performing camera. Never miss a moment at large outdoor sites with its 360-degree views and ability to look up 20 degrees above the horizon.



Specifications

MODEL NAME	2 MP H5A IR PTZ	4 MP H5A IR PTZ	8 MP H5A IR PTZ
Part Number	2.0C-H5A-IRPTZ-DP40-WP	4.0C-H5A-IRPTZ-DP36-WP	8.0C-H5A-IRPTZ-DP36-WP
Resolution	2 MP	4 MP	8 MP
Image Sensor	1/2.8" Progressive Scan CMOS	1/2.5" Type "Exmor R" CMOS Sensor	
Max. Dynamic Range	120 dB	100 dB	
Max. Image Rate	60 fps	30 fps	
Environmental	NEMA TS2, Type 4X, IK10, IP66, 67 and 68		
Operating Temperature	-40 °C to + 60 °C (-40 °F to 140 °F)		
LENS			
Lens	4.25 to 170 mm, F/1.6 – F/4.95, autofocus	4.4 to 88 mm, F/2.0 - F/3.8	
Horizontal Angle of View	63.7 ° – 1.9 °	69.7 ° – 2.2 °	
Zoom	40x (with image stabilization off), 30x (with image stabilization on)	36x (with image stabilization off), 30x (with image stabilization on)	
Minimum Illumination	0.3 lux (F/2.0) in color mode; 0.02 lux (F/2.0) in mono	0.3 lux (F/2.0) in color mode; 0.09 lux (F/2.0) in mono	
IR Illumination Range	300 m	150 m	

Key features

	Automated IR Illumination		20° Above the Horizon Look Up
	Video Analytics with Auto-Tracking		Unusual Activity Detection
	FIPS-Compliant Cryptography Available		Conformant with ONVIF® Profile S, T and G
	Wide Dynamic Range Support		H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG

Learn more



Audio, power & storage

Audio Input/Output	Line level input and output
External I/O Terminals	2 Alarm In, 2 Relay Out
External Power Source	24 VDC ±10%; 24 VAC rms ±10%, 50 or 60 Hz
PoE Power Source ²	IEEE 802.3bt compliant Class 8 (90W) PoE: Phihong POE90U-1BT6-A-RC (Avigilon part number POE-INJ-BT-90W-NA)
Onboard Storage	MicroSD/microSDHC/microSDXC slot – video speed class card required. Class V10 or better recommended.

¹ Additional license required – see page 27.

² High power PoE is only guaranteed with the IEEE 802.3bt compliant Phihong POE90U-1BT. Contact Avigilon sales or Avigilon technical support for more information.



H5A Thermal Cameras

Obtain long-range perimeter protection with powerful heat-sensing technology that can see through complete darkness, smoke, mist and foliage.



Specifications

Model Name	QVGA	VGA
	320F-H5A-THC-B050 320F-H5A-THC-B024 320F-H5A-THC-B016 320F-H5A-THC-B012	640F-H5A-THC-B024 640F-H5A-THC-B018 640F-H5A-THC-B012 640F-H5A-THR-B050 640F-H5A-THR-B032
Part Number		
Resolution	320 x 256 [can be scaled up to 640 x 512]	640 x 512 [can be scaled down to 320 x 256]
Image Sensor	Uncooled VOx Microbolometer	
Dynamic Range	-40°C to 225°C (-40°F to 437°F) [may vary based on operating temperature]	
Max. Image Rate	30 fps	
Environmental	IK10, IP66/67, NEMA 250 Type 4X	

PART NUMBER	LENS	ANGLE OF VIEW (H x V)
640F-H5A-THC-B024	18.0 mm, F1.0	24.3° x 19.5°
640F-H5A-THC-B018	24.3 mm, F1.0	18.0° x 14.4°
640F-H5A-THC-B012	36.0 mm, F1.0	12.2° x 9.8°
320F-H5A-THC-B050	4.3 mm, F1.0	50.0° x 40.0°
320F-H5A-THC-B024	9.1 mm, F1.0	24.1° x 19.2°
320F-H5A-THC-B016	13.8 mm, F1.0	16.0° x 12.8°
320F-H5A-THC-B012	18.0 mm, F1.0	12.2° x 9.7°

Key features

	Video Analytics		Conformant with ONVIF® Profile S, T, G and M
	Radiometric capabilities		H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG
	Rated IK10 for vandal resistance		Rated IP66/67 and NEMA 250 Type 4X for water, dust and corrosion resistance
	FIPS-Compliant Cryptography Available¹, Integrated TPM and Secure Boot		

Audio, power & storage

Audio Compression Method	Opus, G.711 PCM 8 kHz
Audio Input/Output	Line level input and output
External I/O Terminals	Alarm In, Alarm Out
External Power Source	VDC: 12V +/- 10%, 9W min. VAC: 24V +/- 10%, 15VA min.
PoE Power Source	IEEE802.3af Class 3 compliant
Onboard Storage	microSD/microSDHC/microSDXC slot – video speed class card required. Class V10 or better recommended

¹ Additional license required.

Learn more





H5M Cameras

The Small and mighty H5M camera can handle tough environmental conditions while offering advanced AI technology for faster response times and simple installation.



Specifications

Model Name		H5M	
Part Number		R.0C-H5M-D01-IR	
Resolution (MP)		2 MP	5 MP
Image Sensor (progressive scan CMOS)		1/2.8"	
Max. Dynamic Range (dual exposure)		110 dB	
Max. Image Rate		30 fps	24 fps
Max. IR Illumination Distance (at 0 lux)		15 m (50 ft)	
Environmental		-30 °C to +55 °C (-22 °F to 131 °F)	

LENS			
2.8mm, F1.2, IR Corrected	Angle of View	(16:9) 112° (5:4) 72° (4:3) 82°	(5:4) 103° (4:3) 104°
	Minimum Illumination (color / mono)	0.04 lux / 0.02 lux	0.02 lux / 0.01 lux

Key features



Unusual Motion Detection



Conformant with ONVIF Profile S and Profile T



LightCatcher Technology



H.264 & H.265 HDSM SmartCodec Technology, Motion JPEG



Wide Dynamic Range Support

Learn more



Audio, power & storage

External I/O Terminals	None
PoE Power Source	IEEE802.3af Class 0 compliant
Onboard Storage	None

Part number varies based on camera resolution .

H4 Video Intercom

Integrates a fisheye camera with a high-performance intercom, featuring echo-canceling and noise reduction technologies, for clear two-way communication.



Specifications

Model Name		H4 Video Intercom
Part Number		3.0C-H4VI-R01-IR
Resolution		3 MP
Image Sensor (progressive scan CMOS)		1/2.8"
Max. Dynamic Range		120 dB
Max. IR Illumination Distance (at 0 lux)		5 m (15 ft)
Environmental		IP66 weather rating, IK10 impact rating ¹
LENS		
Fisheye, 1.83 mm, F2.4, IR Corrected	Angle of View	170°
	Minimum Illumination	0 lux

Key features

- Maximum Image Rate of 30 fps
- Wide Dynamic Range Support
- Avigilon Appearance Search Technology
- H.264 HDSM SmartCodec Technology, Motion JPEG
- SIP Support
- Conformant with ONVIF Profiles G and S
- LightCatcher Technology

Learn more



Audio, power & storage

Audio Compression Method	Opus, G.711
Audio Input/Output	Built-in microphone with hardware disable / built-in speaker
External I/O Terminals	1 alarm in, 2 alarm out, 1 tamper out
External Power Source	VDC: 12V
PoE Power Source	IEEE802.3af Class 3 compliant
Onboard Storage	microSD/microSDHC/microSDXC slot

¹ IK08 Impact Rating on bubble.



HALO Smart Sensor

Deter vaping in private areas such as bathrooms at schools, hospitals or hotel guest rooms with high accuracy. Detect changes in air quality, increased CO2 levels or gunshot sounds and be alerted instantly with the HALO IoT Smart Sensor 3C and its integration with Avigilon Unity Video. Extend the intelligence of the HALO devices with HALO Cloud, a standalone analytics platform that provides deeper insights and behavior metrics derived from the HALO.



Specifications

Model Name	HALO SMART SENSOR	
Part Number	HALO-3C HALO-CLOUD-(1/3/5/10)YR	HALO-3CPC
Dimensions	119mm x 62mm; 4.7" x 2.44"	
Weight	0.365 kgs; 0.8 lbs	
Operating Temperature	Min: 0C (32F), Max: 50C (122F)	
Power	PoE (IEEE 802.3af Class 3 Compliance) 11W	
Relays / Outputs	1, Normally Closed, 48VDC at 1 amp	
Alarm Triggers	Air Quality Index (AQI), Health Index, Vape, Vape THC, Aggression, Gunshot, Spoken Keyword, Tamper, Particulates, Carbon Dioxide Calibrated, Total Volatile Organic Compounds, Carbon Monoxide, Temperature/Humidity, Light Level, Sound Levels, Building Health, Motion Detection, Panic Button	Air Quality Index (AQI), Health Index, Vape, Vape THC, Aggression, Gunshot, Spoken Keyword, Tamper, Particulates, Carbon Dioxide Calibrated, Total Volatile Organic Compounds, Carbon Monoxide, Temperature/Humidity, Light Level, Sound Levels, Building Health, Motion Detection, Panic Button, Occupancy Counting Alert
USB Port	USB 2.0	
Ethernet Port	Ethernet (RJ45) for Tablet	

Key features

- 

All-In-One, Intelligent Device
- 

2 in 1 Cable Installation
- 

Real-Time Alerts With Avigilon Unity Video
- 

Led-Colored Emergency Alerts

Learn more

















FIPS Cryptography Support


Enables Avigilon cameras to be deployed at sites requiring FIPS-compliant cryptography. Configure FIPS compliant (FIPS 140-2 Level 1) cryptographic mode for supported Avigilon cameras to encrypt data-in-flight to Avigilon FIPS Series Network Video Recorders (NVR).

Optional FIPS license availability



FIPS LEVEL	FIPS LEVEL 1 ENCRYPTION		INTEGRATED TPM
Part Number	CAM-FIPS	An integrated TPM holds the camera's identity securely in a tamper-proof electronic enclosure, preventing even the most determined attacker from impersonating the device	
DESCRIPTION	Camera license to enable FIPS Level 1 cryptographic mode on H5A or H6 camera		
	H6A/H6X cameras	✓	✓
	H6A PTZ cameras	✓	✓
	H6 Mini Dome Cameras	✓	
	H5 Pro Cameras	✓	
	H5A Fisheye Cameras	✓	
	H5A Corner Cameras	✓	
	H5A Dual Head Cameras	✓	
	H5A Modular Cameras	✓	
	H5A-PTZ Cameras	✓	
	H5A IR PTZ Cameras	✓	✓
	H5A Multisensor Cameras	✓	✓
	H6SL Cameras	✓	✓
	H5A Thermal Cameras	✓	✓
	L6A Enterprise LPR camera	✓	✓

¹ Based on CAM-FIPS (camera license) to enable FIPS Level 1 cryptographic mode on H5A cameras.



Unity Camera Accessories

H6A/H6X Dome Cameras

Description	Part Number
Pendant NPT adapter	H6A-MT-NPTA1
Pendant wall arm, 1.5" NPT female, 20 cm (7.8") long	WLMT-1021
In-ceiling adapter	CLADP-1001
Metal ceiling panel for suspended ceiling installations	CLPNL-1011
Weather shield for dome cameras	DMSLD-1001
Replacement clear dome bubble	DMBBL-1001
Replacement IR dome bubble	DMBBL-1011
Optional smoked dome bubble, not compatible with the IR cameras	DMSBL-1001
USB adapter cable, for use with USB-AC56 Wifi install kit	CBLKIT-1011
USB Wifi adapter install kit (North America)	USB-AC56-NA-MSI
USB Wifi adapter install kit (Europe)	USB-AC56-EU-MSI
Camera sealing grommet, pack of 10	GROM-1001
Pipe sealing grommet, pack of 10	GROM-1011
Pole mount adapter	PLMT-1001
Corner mount adapter	CRNMT-1001
Avigilon Camera Gunshot Audio Analytics Channel, one per camera (H6A only)	CAM-AA-GUNSHOT
Avigilon Camera Gunshot Audio Analytics Channel, 180 day demo license. Please contact Avigilon Technical Support. (H6A only)	CAM-AA-GUNSHOT-180D

H6A/H6X Bullet Cameras

Description	Part Number
Replacement BO1 bullet sunshield	H6A-BO-SHLD1
Replacement BO2 bullet sunshield	H6A-BO-SHLD2
USB adapter cable, for use with USB-AC56 Wifi install kit	CBLKIT-1011
USB Wifi adapter install kit (North America)	USB-AC56-NA-MSI-B
USB Wifi adapter install kit (Europe)	USB-AC56-EU-MSI-B
Pole mount adapter	PLMT-1001
Corner mount adapter	CRNMT-1001
Avigilon Camera Gunshot Audio Analytics Channel, one per camera (H6A only)	CAM-AA-GUNSHOT
Avigilon Camera Gunshot Audio Analytics Channel, 180 day demo license. Please contact Avigilon Technical Support. (H6A only)	CAM-AA-GUNSHOT-180D
Camera license to enable FIPS cryptographic module	CAM-FIPS

H6X Box Cameras

Type	Part Number
Outdoor HD Enclosure with Heater	ES-HD-HWS
Outdoor HD Enclosure with Cooling	ES-HD-CWS
Outdoor HD Small Enclosure with Heater	ES-HD-HWS-SM
USB Wi-Fi adapter	USB-AC56-NA-MSI-B / USB-AC56-EU-MSI-B
Computar 2.8-8.5mm f1.2, 1/2.7", 6MP, iCS	AG3Z2812TCS-MPWIR-MSI
Computar 2.8-8.5mm f1.2, 1/2.7", 5MP, P-Iris	AG3Z2812KCS-MPWIR-MSI
Tamron 2.7-13mm f1.4, 1/2.7", 3MP, DC Iris	M13VG2713IR-MSI
Theia 1.8-3mm f1.8, 1/2.7", 4K, DC Iris	SL183A-MSI
Theia 9-40mm f1.5, 1/2.3", 4K, P-Iris	SL940P-MSI
Tamron 8-50mm f1.6, 1/2.7, 3MP, DC Iris	M13VG850IR-MSI
Ricom 3.4-9.85mm f1.86, 1/2.7, 5MP, DC Iris	FG50020P.IR-MSI
Computar 9-50mm f1.5, 1/1.8", 4K, iCS	EG6Z0915TCS-MPWIR-MSI
Theia 12-50mm f1.8, 1/1.7", 4K, P-Iris	SL1250P-MSI
Computar 3.9-10mm f1.5, 1/1.8", 4K, P-Iris	EG3Z3915KCS-MPWIR-MSI
Computar 3.9-10mm f1.5, 1/1.8", 4K, iCS	EG3Z3915TCS-MPWIR-MSI
Tamron 3.8-17mm f1.4, 1/1.7, 4K, DC Iris	M117VG3817IR-MSI
Ricom HV03610P.IR (3.6-10mm)	HV03610P.IR-MSI

H6A PTZ Cameras

Description	Part Number
Mount, Pendant Arm, 30 cm Long, 1.5 NPT	WLMT-1031
Pendant wall arm, 1.5" NPT female, 20 cm (7.8") long	WLMT-1021
Pole mount adapter	PLMT-1001
Corner mount adapter	CRNMT-1001
Camera license required to enable FIPS 140-2 cryptographic modules	CAM-FIPS
Indoor single port PoE+ 30W injector. Injector operational temperature range -20 °C to +40 °C (-4 °F to 104 °F). *NA/EU/UK/AU options available.	PD-9001GR/AT/AC-*MSI
Gigabit 802.3bt 60 W PoE Injector	POE60U-1BTE
PoE injector 802.3bt 90W Single Port	POE90U-1BT
Metal Ceiling Panel for In-Ceiling Installations, Grey	PTZ-CPNL-G
Replacement smoked dome, 25% tint	PTZH6A-SMK25
Replacement smoked dome, 50% tint	PTZH6A-SMK50
Replacement clear dome	PTZH6A-CLRBBL



Unity Camera Accessories

Unity H6SL Cameras

Description	Part Number
Wall Mount Arm for 1.5" NPT Pendant	WLMT-1021
Pole Mount Adapter for WLMT-1021	PLMT-1001
Corner Mount for WLMT-1021	CRNMT-1001
USB WiFi Adapter Install Kit (North America)	USB-AC56-NA-MSI
USB WiFi Adapter Install Kit (Europe)	USB-AC56-EU-MSI
In-ceiling mounting adapter for H6SL Dome	SLSPCIL-1001
Pendant NPT adapter for H6SL Dome	H6SL-MT-NPTA1
Metal ceiling panel for suspended ceiling installations	DCLPNL-1001
Weather shield for H6SL Dome	H6SL-DO-SHLD1
Microphone accessory for Indoor H6SL Dome	ACMICR-1001
Clear lower dome for H6SL Outdoor Dome	H6SL-DD-CLER1
Smoked lower dome for H6SL Outdoor Dome	H6SL-DD-SMOK1
Clear lower dome for H6SL Indoor Dome	H6SL-DI-CLER1
Smoked lower dome for H6SL Indoor Dome	H6SL-DI-SMOK1
Adapter 3/4 inch conduit for H6SL Dome, 5-pack	CNCVR-1001

H6 Mini Dome Cameras

Description	Part Number
Pack of 5 black surface mount bezels	H6M-BZL1-BL
Pack of 5 grey surface mount bezels	H6M-BZL1-GRY
Grey in-ceiling mount adapter	H6M-MT-DCIL1
Black in-ceiling mount adapter	H6M-MT-DCIL1-BL
Grey pendant mount adapter	H6M-MT-NPTA1
Black pendant mount adapter	H6M-MT-NPTA1-BL

H5 Pro Cameras

Type	Part Number
IP66-rated large housing w/ heater and wall arm	ES-HD-HWS-LG
Large housing w/ cooling fan and wall arm	ES-HD-CWS-LG
IP66-rated extra large housing w/ heater. Wall arm sold separately.	ES-HD-HS-XL

H5 Pro Camera Lens Options

Description	Part Number
Sigma 28mm f/1.4	LEF2814SI
Sigma 30mm f/1.4	LEFS3014SI
Tamron 35mm f/1.4	LEF3514TA
Canon 40mm f/2.8	LEF4028CA
Sigma 50mm f/1.4	LEF5014SI
Canon 16-35mm f/2.8	LEF163528CA2
Sigma 18-35mm f/1.8	LEFS183518SI
Tamron 24-70mm f/2.8 VC	LEF247028TA2
Tamron 70-200mm f/2.8 VC	LEF7020028TA
Tamron 150-600mm f/5-6.3 VC	LEF1506005TA

Unity H5A Multisensor Cameras

Description	Part Number
Outdoor surface mount adapter, must order either a H5AMH-DO-COVR1 or H5AMH-DO-COVR1-SMOKE	H5AMH-AD-DOME1
Outdoor pendant mount adapter, must order one of WLMT-1001 or NPTA-1001 and one of H5AMH-DO-COVR1 or H5AMH-DO-COVR1-SMOKE	H5AMH-AD-PEND1
In-ceiling adapter, must order either a H5AMH-DC-COVR1 or H5AMH-DC-COVR1-SMOKE	H5AMH-AD-CEIL1
Dome bubble and cover, for outdoor surface mount or pendant mount, clear	H5AMH-DO-COVR1
Dome bubble and cover, for outdoor surface mount or pendant mount, smoked. Not recommended for low light applications	H5AMH-DO-COVR1-SMOKE
Dome bubble and cover, for in-ceiling mount, clear	H5AMH-DC-COVR1
Dome bubble and cover, for in-ceiling mount, smoked. Not recommended for low light applications	H5AMH-DC-COVR1-SMOKE
Pendant wall arm adapter, for use with H5AMH-AD-PEND1	WLMT-1001
Pendant NPT adapter for use with H5AMH-AD-PEND1	NPTA-1001
Aluminum pole mounting bracket, compatible with WLMT-1001	PLMT-1001
Aluminum corner mounting bracket, compatible with WLMT-1001	CRNMT-1001
Metal ceiling panel	CPNL-1001
Optional IR illuminator ring, for use with H5AMH-DO-COVR1	H4AMH-AD-IRIL1
Indoor single port PoE+ 30W injector. Injector operational temperature range -20 °C to +40 °C (-4 °F to 104 °F)	PD-9001 GR/AT/AC-*-MSI
Gigabit 802.3bt 60 W PoE Injector, single port.	POE60U-1BTE
USB Wi-Fi adapter	USB-AC56-NA-MSI / USB-AC56-EU-MSI
Cable kit replacement for Multi Head cameras	CBLKT-1001
Camera license to enable FIPS cryptographic mode on the H5A Multisensor or any H5A camera	CAM-FIPS



Unity Camera Accessories

H5A Fisheye Cameras

Type	Part Number
NPT adapter for the H5A Fisheye surface mount camera	H5A-FE-MT-NPTA1
Pendant wall mount, compatible with H5A-FE-MT-NPTA1	WLMT-1021
Aluminum corner mounting bracket, compatible with WLMT-1021	H4-MT-CRNR1
Package of 3 dome replacement parts for H5A Fisheye surface mount camera	H5A-FE-DD-CLER1
Metal ceiling panel to reinforce the existing ceiling tile in suspended ceiling installations for H5A Fisheye in-ceiling mount camera	H5A-FE-DC-CPNL1

H5A Corner Cameras

Description	Part Number
USB Wi-Fi adapter	H4-AC-WIFI2-NA / H4-AC-WIFI2-EU
3.5 mm jack with 1.8 m fly wire	CM-AC-AVIO1

H5A Dual Head Cameras

Type	Part Number
Replacement Dome Cover	H5DH-DO-CLER1
Optional Junction Box Mounting Adapter	H5DH-DO-JBOX1
Optional Pendant NPT Mounting Adapter	H5DH-MT-NPTA1
Pendant Wall Mount Arm	WLMT-1021
Corner Mounting Bracket	H4-MT-CRNR1
Pole Mounting Bracket	H4-MT-POLE1
PoE injector	POE-INJ2-STD
USB WiFi adapter	H4-AC-WIFI2-NA
	H4-AC-WIFI2-EU

H5A Modular Cameras

Type	Part Number
2 m (6 ft) HD BNC Cable for H5A Modular Camera Imager	CBL2M-1001
5 m (16 ft) HD BNC Cable for H5A Modular Camera Imager	CBL5M-1001
Din rail mount for H5A Modular Camera Main Unit	BRKTMD-1001
Replacement L Bracket for H5A Modular Micro Bullet Imager	BRKTMD-1011
Replacement Flat Bracket for H5A Modular Right Angle Imager	BRKTMD-1021
Replacement Trim Ring Bracket for H5A Modular Micro Bullet Imager	BRKTMD-1031

H5A PTZ Cameras

Type	Part Number
NPT Pendant Adapter	IRPTZ-MNT-NPTA1
Wall Arm Mount	IRPTZ-MNT-WALL1
Pole Mounting Bracket, compatible with IRPTZ-MNT-WALL1	H4-MT-POLE1
Corner Mounting Bracket, compatible with IRPTZ-MNT-WALL1	CRNMT-1001
Corner Mounting Bracket	H4-MT-CRNR1
Metal Ceiling Panel for In-Ceiling Installation	PTZMH-DC-CPNL1
Clear Bubble Assembly - Replacement	PTZH5A-CLER1
Smoked Bubble Assembly - Replacement	PTZH5A-SMOK1
Gigabit 802.3bt 60W PoE Injector, single port.	POE-INJ-BT-60W-NA
30W PoE+ Injector. Injector operational temperature range is -20°C (-4°F) to 40°C (104°F). NA/EU/UK/AU options available.	POE-INJ2-PLUS-NA
H4 In-Ceiling PTZ audio retrofit kit	PTZ-ACCS-IC-RETRO
Cable gland nut kit, pack of 10	H5PTZ-ACCS-CABL1
Camera license to enable FIPS Level 1 cryptographic mode	CAM-FIPS

H5A IR PTZ Cameras

Type	PART NUMBER
NPT Pendant Adapter	IRPTZ-MNT-NPTA1
Wall Arm Mount	IRPTZ-MNT-WALL1
Pole Mounting Bracket	H4-MT-POLE1
Corner Mounting Bracket	H4-MT-CRNR1
Gigabit 802.3bt 60 W PoE Injector, single port	POE-INJ-BT-60W-NA
Gigabit 802.3bt 90 W PoE Injector, single port	POE-INJ-BT-90W-NA
Cable gland nut kit, pack of 10	H5PTZ-ACC-CABL1

H5A Thermal Cameras

Description	Part Number
Pole Mount for H5A Thermal Camera, compatible with WLMT-1001	PLMT-1001
Corner Mount for H5A Thermal Camera, compatible with WLMT-1001	CRNMT-1001
USB WiFi Adapter Install Kit (North America)	USB-AC56-NA-MSI
USB WiFi Adapter Install Kit (Europe)	USB-AC56-EU-MSI

H5M Cameras

Type	Part Number
In-ceiling mount	H5M-MT-DCIL1
Package of 4 camera shroud replacement parts	H5M-DO-BZL1

Unity Camera Accessories

H4 Video Intercom


Type	Part Number
Surface mount adapter	H4VI-MT-SURF1
Safety relay	H4VI-AC-RELY1
PoE injector	POE-INJ2-STD

H4 LPC Cameras

Type	Part Number
Pedestal and ceiling mount	ES-HD-MNT-PAR
Large pole mount	ES-HD-MNT-POLE-LG
Medium pole mount	ES-HD-MNT-POLE-MD
Small pole mount	ES-HD-MNT-POLE-SM
Wall reinforcing plate	ES-HD-MNT-PLATE
Corner mount adapter	ES-HD-MNT-CORNER

L6A Cameras

TYPE	PART NUMBER
Pole mount adaptor	PLMT-1001
L6A sunshade replacement	VS-L6A-SHADE
Corner mounting bracket	CRNMT-1001
Camera license to enable FIPS Level 1 cryptographic mode	CAM-FIPS



Alta Cameras

The Motorola Solutions Avigilon Alta cloud-native video security system is open, flexible and future-proof. Combine smart cameras with the intuitive AI-powered Alta Video cloud platform for enhanced security and awareness anywhere, anytime. With the widest range of cloud camera options on the market, choose from audio capabilities, sensors, and vandal- and weather-resistant models to create your deployment.



Ava Flex Camera

The AI-powered, cloud-native Avigilon Ava Flex wireless camera provides smart, enterprise physical security features in an affordable, easy-to-install package to provide security to small business, retail stores, and other distributed businesses.



Specifications

MODEL NAME		AVIGILON AVA FLEX CAMERA
Part Number		FLEX-2MP-7
Resolution (MP)		2 MP
Image Sensor		1/2.7"
IR Night Vision		Color night vision, Adaptive white light
Minimum Illumination in Color Mode		<0.1lux
Max. Resolution and Frame Rate		1920x1080, 30fps
Dynamic Range		Multi-exposure line-based HDR
Environmental Sensors		Temperature and humidity
Sensor Accuracy		Temperature: ±2.5°C (±4.5°F) Humidity: ±5%
Security		Trusted Platform Module, Factory-installed certificates, No default passwords, Mandatory access authentication, HTTPS/TLS encryption
Physical Characteristics		With Ball joint mount: 80 x 80 x 96 mm, 202 g Camera: 80 x 80 x 38 mm, 142 g

LENS (REMOTE ZOOM AND FOCUS)		
3.3mm, f/1.1, Fixed focus	Horizontal Field of View	110°
	Vertical Angle of View	58°

Key features

- 

Versatile, lightweight and fit for discreet indoor locations
- 

Wi-Fi and PoE for flexible deployments
- 

Fixed lens camera with color night vision
- 

Insights from integrated environmental sensors
- 

Built-in AI video and audio analytics
- 

On-board storage and processing

Learn more



Audio, power & storage

Audio	Microphone
Power Source	PoE 802.3af or USB-C 1.5A
Power Consumption	Typical: 3.5W Max: 6W
Networking Protocols	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTPC, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
Connection	802.3u 10/100 Ethernet USB-C for preview and setup
Onboard Storage	MicroSD SDXC High Speed



Ava Compact Dome Camera

The AI-powered, cloud-native Avigilon Ava Compact Dome camera is discreet, robust, and easy to install and manage, providing crystal clear visibility indoors to help ensure safety and security.









Specifications

MODEL NAME		AVIGILON AVA COMPACT DOME CAMERA	
Part Number		COMPACTDOME-W-5MP-30	COMPACTDOME-W
		COMPACTDOME-W-5MP-60	
		COMPACTDOME-W-5MP-120	
On-board Storage		30, 60, or 120 days	None. Cloud Connector required.
Resolution (MP)		5 MP	
Image Sensor Size Format		1/2.7"	
IR Night Vision		Automatic Night Mode, IR-cut filter, 10m IR Range, 850 nm IR LED	
Minimum Illumination in Color Mode		0.10lux	
Max. Resolution and Frame Rate		2688x1944@30fps	
Dynamic Range		Multi-exposure line-based HDR	
Environmental		Operating: 0°C to +40°C Storage: -40°C to +60°C	
Security		Trusted Platform Module, Factory-installed certificates, No default passwords, Mandatory access authentication, HTTPS/TLS encryption	
Physical Characteristics		Dimensions: 107x107x64mm Weight: 280g	

LENS (REMOTE ZOOM AND FOCUS)		
3.2mm, f/1.3, Fixed focus	Horizontal Field of View	102°
	Vertical Angle of View	71°

Key features

-  Easy installation, configuration, and management
-  Cloud-native deployment
-  AI video analytics for loitering, anomalies and more
-  Audio analytics and acoustic sensor
-  5 MP Image Sensor
-  On-board storage¹ and processing

Learn more



Audio, power & networking

Audio	Microphone
Power Source	PoE 802.3af USB-C, installation only
Power Consumption	Typical: 5W Max: 8W
Networking Protocols	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTCP, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
Connection	802.3ab 10/100/1000 Gigabit Ethernet USB-C for preview and setup

¹ Available on most models



Ava Dome Camera







The AI-powered, cloud-native Avigilon Ava Dome camera is versatile, robust, and easy to install and manage, providing crisp, clear images to help you stay on top of what matters.



Specifications

MODEL NAME		AVIGILON AVA DOME CAMERA			
Part Number		DOME-W-4K-30 DOME-W-4K-60	DOME-W-4K	DOME-W-5MP-30 DOME-W-5MP-60 DOME-W-5MP-120	DOME-W-5MP
On-board Storage		30 or 60 days	None. Cloud Connector required.	30, 60 or 120 days	None. Cloud Connector required.
Resolution (MP)		4K		5 MP	
Image Sensor		8 MP (4K)			
IR Night Vision		Automatic Night Mode, IR-cut filter, 30M IR Range, 850 nm IR LED			
Minimum Illumination in Color Mode		0.15lux			
Max. Resolution and Frame Rate		3840x2160@30fps		3072x1728@30fps	
Dynamic Range		Multi-exposure line-based HDR			
Environmental		IP66 Weather Rating, IK10 Impact Rating			
Security		Trusted Platform Module, Factory-installed certificates, No default passwords, Mandatory access authentications, HTTPS/TLS encryption			
Physical Characteristics		Dimensions: 152x152x96mm Weight: 1.2 kg Body: Aluminum			
LENS (REMOTE ZOOM AND FOCUS)					
3.6-10mm,	Horizontal Field of View		100°- 45°		
f/1.5-f/2.8, P-Iris	Vertical Angle of View		53° - 25°		

Key features

-  Easy installation, configuration, and management
-  Cloud-native deployment
-  AI video analytics for loitering, anomalies and more
-  Audio analytics and acoustic sensor
-  4K Image Sensor
-  On-board storage¹ and processing

Learn more



Audio, power & networking

Audio	Microphone Array (4x microphones) Audio source localization
Power Source	PoE+ (802.3at Type 2)
Power Consumption	Typical: 5W Max without heater: 13W Max with heater: 23W
Networking Protocols	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTCP, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
Connection	802.3ab 10/100/1000 Gigabit Ethernet USB-C for preview and setup

¹ Available on most models



Ava Bullet Cameras


The AI-powered, cloud-native Avigilon Ava Dome camera is versatile, robust, and easy to install and manage, providing crisp, clear images to help you stay on top of what matters.





Specifications


MODEL NAME		AVIGILON AVA BULLET CAMERA (WIDE)		AVIGILON AVA BULLET (TELEPHOTO)	
Part Number		BULLET-WI-W-4K-30 BULLET-WI-W-4K-60 BULLET-WI-W-5MP-30 BULLET-WI-W-5MP-60 BULLET-WI-W-5MP-120	BULLET-WI-W BULLET-WI-W-5MP	BULLET-TE-W-4K-30 BULLET-TE-W-4K-60 BULLET-TE-W-5MP-30 BULLET-TE-W-5MP-60 BULLET-TE-W-5MP-120	BULLET-TE-W BULLET-TE-W-5MP
On-board Storage		30, 60, or 120 days	None. Cloud Connector required.	30, 60, or 120 days	None. Cloud Connector required.
Resolution (MP)		5 MP, 4K			
Image Sensor		1/1.8"			
IR Night Vision		Automatic Night Mode, IR-cut filter, 850 nm IR LED			
Minimum Illumination in Color Mode		4K: 3840x2160@30fps 5 MP: 3072x1728@30fps			
Dynamic Range		Multi-exposure line-based HDR			
Environmental		IK10 Impact Resistance, IP66 Ingress Protection			
Security		Trusted Platform Module, Factory-installed certificates, No default passwords, Mandatory access authentication, HTTPS/TLS encryption			
Physical Characteristics		Dimensions: 284x86x108 Weight: 1.33 kg			
LENS (Remote Zoom and Focus)		Wide		Telephoto	
4.3-10.8mm, f/1.38-f/2.8	Zoom	2.5x			
	Horizontal Field of View	100° - 40°		39° - 16°	
	Vertical Angle of View	53° - 23°		23° - 9°	


Key features


- 


Available in wide and telephoto lenses for flexible coverage options
- 

Simple to install with innovative sliding body design and easy onboarding
- 

Cloud-native deployment
- 

Dynamic resolution up to 4K
- 

AI video analytics for loitering, anomalies and more
- 

Audio analytics and acoustic sensor
- 

On-board storage¹ and processing

Learn more



Audio, power & networking

Audio	Microphone Array (4x microphones) Audio source localization
Power Source	PoE+ (802.3at Type 2), normal operation PoE (802.3 af), without heat and IR USB-C, installation only
Power Consumption	Typical: 5 W Max without heater, with IR: 13 W Max with heater: 23 W
Networking Protocols	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTCP, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
Connection	802.3u 10/100 Ethernet USB-C for preview and setup

¹ Available on most models



Ava 360 Camera







The AI-powered, cloud-native Avigilon Ava 360 camera is ideal for locations that require visibility in all areas. Whether indoors or outdoors, the Ava 360 provides high resolution coverage of a wide area, even in challenging environments and with low light.



Specifications

MODEL NAME		AVIGILON AVA 360 CAMERA	
Part Number	360-W-30 360-W-60	360-W	
On-board Storage	30 or 60 days	None. Cloud Connector required.	
Resolution (MP)	12 MP, 1/2.3"		
Effective Resolution (MP)	9 MP		
Field of View	> 180°		
IR Night Vision	Automatic Night Mode, IR-cut filter, 20m IR Range, 850 nm IR LED		
Minimum Illumination in Color Mode	0.4lux		
Max. Resolution and Frame Rate	3008x3008@30fps		
Dynamic Range	Multi-exposure line-based HDR		
Environmental	IP66 Ingress Protection, IK10 Impact Resistance		
Security	Trusted Platform Module, Factory-installed certificates, No default passwords, Mandatory access authentication, HTTPS/TLS encryption		
Physical Characteristics	Dimensions: 152x152x77mm Weight: 1.1 kg Body: Aluminum		

Key features

-  360° fisheye panoramic with IR
-  Easy installation, configuration, and management
-  Cloud-native deployment
-  AI video analytics for loitering, anomalies and more
-  12 MP image sensor
-  On-board storage¹ and processing

Learn more



Audio, power & networking

Audio	Microphone array (4x microphones)
Power Source	PoE+ (802.3at Type 2) For installation only: USB-C (1.5A mode)
Power Consumption	Typical: 5 W Max without heater: 13 W Max with heater: 23 W
Networking Protocols	IPv4, HTTPS, TLS, DNS, mDNS, DNS-SD, NTP, RTSP, RTP, RTCP, ICMP, DHCP, ARP Streaming: RTP/UDP, RTP/RTSP/HTTPS/TCP
Connection	802.3ab 10/100/1000 Gigabit Ethernet USB-C for preview and setup

¹ Available on most models



Alta H6SL Cameras

Protect people and property effortlessly with this cloud-native, versatile, analytics-enabled camera line that can fit into an extensive range of indoor and outdoor applications.

Specifications



Model Name	INDOOR DOME		OUTDOOR DOME		BULLET	
	NON-IR	IR			WIDE	TELEPHOTO
Part Number	2.0C-H6SL-D1-C	2.0C-H6SL-D1-IR-C	2.0C-H6SL-DO1-IR-C	2.0C-H6SL-BO1-IR-C	2.0C-H6SL-BO1-IR-C	3.0C-H6SL-BO2-IR-C
	3.0C-H6SL-D1-C	3.0C-H6SL-D1-IR-C	3.0C-H6SL-DO1-IR-C	3.0C-H6SL-BO1-IR-C	3.0C-H6SL-BO1-IR-C	5.0C-H6SL-BO2-IR-C
	5.0C-H6SL-D1-C	5.0C-H6SL-D1-IR-C	5.0C-H6SL-DO1-IR-C	5.0C-H6SL-BO1-IR-C	5.0C-H6SL-BO1-IR-C	
On-board Storage C	30, 60, 120, or 365* days					
Resolution	2 MP, 3 MP, 5 MP					3 MP, 5 MP
Image Sensor	1/2.8" progressive scan CMOS					
Dynamic Range HDR OFF	83 dB					
Dynamic Range HDR ON	2MP = 126 dB, 3 MP/5MP = 130 dB					
Max. Image Rate	30 fps					
Environmental	IK10		IK10, IP66/67, Type 4X			
LENS & IR ILLUMINATION		3.4-10.5 MM LENS (DOME AND WIDE BULLET)		10.9-29 MM LENS (TELEPHOTO BULLET ONLY)		
		Dome				
Max. IR Illumination Distance (high power 850 nm LEDs)		30 m (100 ft), full tele 20 m (65 ft), full wide				N/A
	Bullet 2 MP	50 m (164 ft), full tele 30 m (100 ft), full wide				N/A
	Bullet 3 MP, 5 MP	40 m (131 ft), full tele 20 m (65 ft), full wide			70 m (230 ft), full tele 30 m (100 ft), full wide	
Min. Illumination (at 33 ms shutter speed)	2 MP	With IR: 0 lux in mono mode Without IR: 0.01 lux in color mode; 0.005 lux in mono mode				N/A
	3 MP 5 MP			With IR: 0 lux in mono mode Without IR: 0.04 lux in color mode; 0.02 lux in mono mode		
Horizontal Field of View (H) & Vertical Field of View (V)	2 MP	101° - 31° (H), 53° - 17° (V)				N/A
	3 MP 5 MP	95° - 28° (H), 69° - 21° (V)			28° - 10° (H), 21° - 7° (V)	

Key features

- AI video analytics for loitering, anomalies and more
- High Dynamic Range
- IR Illumination (optional on Indoor Dome)
- Cloud-native deployment
- On-board storage and processing
- Rated IK10 for vandal resistance on all models
- Rated IP66/67 and NEMA 250 Type 4X for water, dust and corrosion resistance (outdoor models only)

Learn more



Audio & power

Audio Compression Method	G.711 PCM 8 kHz, Opus
Audio Input/Output	Line level input and output
External I/O Terminals	Alarm In, Alarm Out
Microphone	Optional microphone accessory sold separately (Indoor Dome model only)
PoE Power Source	IEEE 802.3af Class 3 compliant, 12VDC Aux (Bullet only)

* 365 day storage only available on 2 MP models



Alta H5A Multisensor Cameras

The Alta H5A Multisensor combines all-around visibility, image quality and ease-of-use to secure any area over the cloud. With 3 or 4 sensors and up to a 360° field of view, you can see around corners, through intersections or across parking lots with a single camera.

Specifications



MODEL NAME	H5A MULTISENSOR, 3-SENSORS		H5A MULTISENSOR, 4-SENSORS	
Part Number	9C-H5A-3MH-30	15C-H5A-3MH-60	12C-H5A-4MH-30	20C-H5A-4MH-60
	9C-H5A-3MH-60	15C-H5A-3MH-120	12C-H5A-4MH-60	32C-H5A-4MH-30
	9C-H5A-3MH-120	24C-H5A-3MH-30	20C-H5A-4MH-30	
	15C-H5A-3MH-30	24C-H5A-3MH-60		
On-board Storage	30, 60, or 120 days, depending on configuration		30 or 60 days, depending on configuration	
Resolution	3 x 3 MP 3 x 5 MP 3 x 8 MP		4 x 3 MP 4 x 5 MP 4 x 8 MP	
Image Sensor	1/2.8" progressive scan CMOS			
Max. Dynamic Range (dB)	HDR On: 120 dB, true HDR, dual exposure HDR Off: 80 dB			
Max. Image Rate (60 Hz / 50 Hz)	3 MP : 30/25 fps 5 MP : 24/25 fps 8 MP : 17/16 fps			
Max. IR Illumination Distance¹ (high power 850 nm LED)	30 m (98 ft) maximum distance at 0 lux when camera is mounted at 4 m (13 ft) off the ground			
Environmental	IP66 and IP67 Weather Rating, NEMA 4X Enclosure Rating, IK10 Impact Rating			
LENS & IR ILLUMINATION	3.0 MP	5.0 MP	4k (8.0 MP)	
Focal Length	3.3-5.7mm			
Horizontal FoV based on Aspect Ratio	53°-99° (4:3)		58°-106° (16:9)	
Vertical FoV based on aspect ratio	39°-69° (4:3)		32°-55° (16:9)	
Aperture Range	F1 - F1.9			
Control	Fixed Iris, Remote Focus and Zoom			

Key features

- AI video analytics for loitering, anomalies and more
- High Dynamic Range
- IR Illumination (optional)
- Cloud-native deployment
- On-board storage and processing
- IK10-rated for vandal resistance
- IP66/67, NEMA Type 3X and TS2 ratings protect against impact, water, windblown dust and a degree of corrosion


Learn more



Audio, Power & Networking

Audio Compression Method	G.711 PCM 8 kHz, Opus	
Audio Input/Output	Line level input and output	
External I/O Terminals	Alarm In, Alarm Out	
External Power	24 VDC ± 10 %; 24 VAC rms ± 10 %, 50 or 60 Hz	
PoE Power Source	In-Ceiling	30 W IEEE 802.3at Type 2 (PoE+)
	Surface Mount and Pendant Mount	With IR: 60 W (PoE++): IEEE 802.3bt Type 3, Cisco® UPoE or legacy high-power PoE Up to 35% IR Power or without IR: 30 W IEEE 802.3at Type 2 (PoE+)
Onboard Storage	microSD/microSDHC/microSDXC slot – class 10/ UHS-1 or better recommended	

¹ IR intensity is based on the supplied PoE power
² Audio output is not currently supported
³ Not currently supported



Alta H5A Modular Cameras

The Alta H5A Modular camera is our smallest camera, most flexible camera, designed to provide visibility and security in the most challenging spaces.

Specifications: Imager Modules



MODEL NAME	RIGHT ANGLE IMAGER MODULE	MICRO BULLET IMAGER MODULE	
Part Number	3C-H5MOD-RP4	3C-H5MOD-MB2	5C-H5MOD-MB3
Resolution (MP)	3.0 MP	3.0 MP	5.0 MP
Image Sensor	1/2.7 " Progressive Scan		
Max. Dynamic Range (dB)	WDR Off: 82 dB WDR On: 120 dB		
Max. Image Rate	WDR Off: 25 fps/30 fps WDR On: 20 fps/20 fps		
Operating Temperature	-30 °C to +60 °C (-22 °F to 140 °F)		
Environmental	N/A	IP66 Rating	
Lens	3.7 mm fixed pinhole aperture	2.8 mm fixed	
Horizontal Angle of View (HFOV)	92°	110°	
Vertical Angle of View (VFOV)	53°	80°	
Min. Illumination	0.1 lux		

Key features



AI video analytics for loitering, anomalies and more



Cloud-native deployment



Highly customizable modular design



Fast, flexible installation



On-board storage and processing



High dynamic range

Learn more



* Based on the H5A-MOD-2P-1-30 main unit, 1 x 3MP imager module and 1 x 2m cable


¹ Audio output is not currently supported

² Not currently supported

Main Unit



MODEL NAME	MODULAR BASE UNIT, 1 LENS SUPPORT	MODULAR BASE UNIT, 2 LENS SUPPORT
Part Number	H5A-MOD-2P-1-30 H5A-MOD-2P-1-60 H5A-MOD-2P-1-120 H5A-MOD-2P-1-365	H5A-MOD-2P-2-30 H5A-MOD-2P-2-60 H5A-MOD-2P-2-120
Storage	30, 60, 120 or 365 days, depending on configuration	30 or 60 days, depending on configuration
Max Image Rate (Based on combined resolution of imagers in 2 lens model)	(≤ 5 MP) 25 fps/30 fps	(6 MP) 25 fps/24 fps
Max. Dynamic Range	Up to 120 dB	
Operating Temperature	-10 °C to +60 °C (14 °F to 140 °F)	
Audio Compression Method	G.711 PCM 8 kHz, Opus	
Audio Input/Output ¹	Line level input and output	
External I/O Terminals ²	Alarm In, Alarm Out	
Power Consumption	13 W Max	
Power Source	VDC: 12 V +/-10%, 11.5 W min PoE: IEEE 802.3af Class 3 compliant	



Alta Camera Accessories

Avigilon Ava Dome Camera

Type	PART NUMBER
Avigilon Ava Pendant Mounting Cap	ACC-PEN-CAP-W
Avigilon Ava Wall Mount Arm	ACC-MNT-ARM-W
Avigilon Ava Pendant Head	ACQ-PEN-HEA
Avigilon Ava Pendant Pipe 40cm	ACQ-PEN-PIP
Avigilon Ava Pole Bracket	ACC-POL-BRA-W
Avigilon Ava Corner Bracket	ACC-CRN-BRA-W
Avigilon Ava Conduit Adapter 3/4"	ACC-CON-A34-W

Avigilon Ava Compact Dome

Type	PART NUMBER
Avigilon Ava Drop Ceiling Mount	ACC-DRO-CEI
	ACC-POE-15W-US
Avigilon Ava PoE Injector 15W	ACC-POE-15W-UK
	ACC-POE-15W-EU

Avigilon Ava 360 Camera

Type	PART NUMBER
Avigilon Ava Pendant Mounting Cap	ACC-PEN-CAP-W
Avigilon Ava Wall Mount Arm	ACC-MNT-ARM-W
Avigilon Ava Wall Mount Arm	ACC-MNT-ARM-B
Avigilon Ava Pendant Head	ACQ-PEN-HEA
Avigilon Ava Pendant Pipe 40cm	ACQ-PEN-PIP
Avigilon Ava Pole Bracket	ACC-POL-BRA-W
Avigilon Ava Corner Bracket	ACC-CRN-BRA-W
Avigilon Ava Conduit Adapter 3/4"	ACC-CON-A34-W

Avigilon Ava Quad Camera

Type	PART NUMBER
Avigilon Ava Recessed Kit	ACQ-REC-KIT
Avigilon Ava Pendant Head	ACQ-PEN-HEA
Avigilon Ava Pendant Pipe 40cm	ACQ-PEN-PIP
Avigilon Ava Wall Mount Bracket	ACQ-WAL-MNT
Avigilon Ava Pole Bracket	ACQ-POL-MNT
Avigilon Ava Corner Bracket	ACQ-CRN-MNT
Avigilon Ava Mounting Adapter	ACC-MNT-ADA

Avigilon Ava Compact Dome

Type	PART NUMBER
Avigilon Ava Drop Ceiling Mount	ACC-DRO-CEI
	ACC-POE-15W-US
Avigilon Ava PoE Injector 15W	ACC-POE-15W-UK
	ACC-POE-15W-EU

Avigilon Ava Bullet Camera

Type	PART NUMBER
Avigilon Ava Weather shield	ACC-WEA-SHI-W
Avigilon Ava Conduit back box	ACC-CON-BCK-W
Avigilon Ava Adapter plate	ACC-ADA-PLA-W
Avigilon Ava Pole bracket	ACC-POL-BRA-W
Avigilon Ava Corner bracket	ACC-CRN-BRA-W

Alta H6SL Cameras

Description	Part Number
Wall Mount Arm for 1.5" NPT Pendant	WLMT-1021
Pole Mount Adapter for WLMT-1021	PLMT-1001
Corner Mount for WLMT-1021	CRNMT-1001
USB WiFi Adapter Install Kit (North America)	USB-AC56-NA-MSI
USB WiFi Adapter Install Kit (Europe)	USB-AC56-EU-MSI
In-ceiling mounting adapter for H6SL Dome	SLSPCIL-1001
Pendant NPT adapter for H6SL Dome	H6SL-MT-NPTA1
Metal ceiling panel for suspended ceiling installations	DCLPNL-1001
Weather shield for H6SL Dome	H6SL-DO-SHLD1
Microphone accessory for Indoor H6SL Dome	ACMICR-1001
Clear lower dome for H6SL Outdoor Dome	H6SL-DD-CLER1
Smoked lower dome for H6SL Outdoor Dome	H6SL-DD-SMOK1
Clear lower dome for H6SL Indoor Dome	H6SL-DI-CLER1
Smoked lower dome for H6SL Indoor Dome	H6SL-DI-SMOK1
Adapter 3/4 inch conduit for H6SL Dome, 5-pack	CNCVR-1001




Alta Camera Accessories

Alta H5A Multisensor Cameras

Description	Part Number
Outdoor surface mount adapter, must order either a H5AMH-DO-COVR1 or H5AMH-DO-COVR1-SMOKE	H5AMH-AD-DOME1
Outdoor pendant mount adapter, must order one of WLMT-1001 or NPTA-1001 and one of H5AMH-DO-COVR1 or H5AMH-DO-COVR1-SMOKE	H5AMH-AD-PEND1
In-ceiling adapter, must order either a H5AMH-DC-COVR1 or H5AMH-DC-COVR1-SMOKE	H5AMH-AD-CEIL1
Dome bubble and cover, for outdoor surface mount or pendant mount, clear	H5AMH-DO-COVR1
Dome bubble and cover, for outdoor surface mount or pendant mount, smoked. Not recommended for low light applications	H5AMH-DO-COVR1-SMOKE
Dome bubble and cover, for in-ceiling mount, clear	H5AMH-DC-COVR1
Dome bubble and cover, for in-ceiling mount, smoked. Not recommended for low light applications	H5AMH-DC-COVR1-SMOKE
Pendant wall arm adapter, for use with H5AMH-AD-PEND1	WLMT-1001
Pendant NPT adapter for use with H5AMH-AD-PEND1	NPTA-1001
Aluminum pole mounting bracket, compatible with WLMT-1001	PLMT-1001
Aluminum corner mounting bracket, compatible with WLMT-1001	CRNMT-1001
Metal ceiling panel	CPNL-1001
Optional IR illuminator ring, for use with H5AMH-DO-COVR1	H4AMH-AD-IRIL1
Indoor single port PoE+ 30W injector. Injector operational temperature range -20 °C to +40 °C (-4 °F to 104 °F)	PD-9001 GR/AT/AC-*-MSI
Gigabit 802.3bt 60 W PoE Injector, single port.	POE60U-1BTE
USB Wi-Fi adapter	USB-AC56-NA-MSI / USB-AC56-EU-MSI
Cable kit replacement for Multi Head cameras	CBLKT-1001
Camera license to enable FIPS cryptographic mode on the H5A Multisensor or any H5A camera	CAM-FIPS

H5A Modular Cameras

Type	Part Number
2 m (6 ft) HD BNC Cable for H5A Modular Camera Imager	CBL2M-1001
5 m (16 ft) HD BNC Cable for H5A Modular Camera Imager	CBL5M-1001
Din rail mount for H5A Modular Camera Main Unit	BRKTMD-1001
Replacement L Bracket for H5A Modular Micro Bullet Imager	BRKTMD-1011
Replacement Flat Bracket for H5A Modular Right Angle Imager	BRKTMD-1021
Replacement Trim Ring Bracket for H5A Modular Micro Bullet Imager	BRKTMD-1031



Video Infrastructure

Whether you need a couple of cameras to monitor a storefront or thousands of cameras to secure a large campus, using a complete Avigilon solution helps take the risk out of deployment and maintenance. Avigilon Network Video Recorders (NVRs) and appliances are pre-configured for enhanced system performance and to save you time during deployment.



AI NVR 2

Enhance your video security infrastructure with robust analytics for Avigilon and third-party cameras using the second-generation Artificial Intelligence Network Video Recorder (AI NVR 2). Suitable for enterprise sites of any size and retention policy, the AI NVR 2 expands on the capabilities of its predecessors, offering up to 440 TB of storage for up to 400 cameras for recording and 220 cameras for Appearance Search.

Specifications



MODEL NAME	PREMIUM PLUS Form H	PREMIUM Form D	STANDARD Form D	VALUE Form D
Part Number	AINVR2-PRM-PLUS-FORM-H- C TB	AINVR2-PRM-FORM-D- C TB	AINVR2-STD-FORM-D- C TB	AINVR2-VAL- C TB
Storage capacity C	200 240 280 360 440 TB	72 96 120 160 200 TB	16 24 32 48 64 TB	6 12 16 24 TB
OS	Avigilon Hardened OS			
Out-of-band management	iLO Advanced	iDRAC 9 Enterprise		iDRAC 9 Express
Support	5YR, 4HR, Mission critical	5YR, 4HR, Mission critical	5YR Next business day	3YR Next business day
Networking	4x1G & 4x10G SFP+	6x1G & 4x10G SFP+	6x1G	2x1G
Recording rate ¹	300 to 400 ch @ 2000 to 2700 Mbps	200 ch @ 1500 Mbps	130 ch @ 900 Mbps	70 to 90 ch @ 450 to 550 Mbps
Live stream rate ¹	300 to 400 ch @ 2000 to 2700 Mbps	600 ch @ 1500 Mbps	600 ch @ 800 Mbps	70 to 90 ch @ 450 to 550 Mbps
Playback rate ¹	80 to 100 ch @ 600 to 680 Mbps	80 ch @ 600 Mbps	80 ch @ up to 600 Mbps	40 to 45 ch @ 250 to 300 Mbps
Redundancy	RAID60		RAID6	
			RAID5	

Camera & analytics support

MODEL	ANALYTICS KIT	ANALYTICS CAMERAS ²		NON-ANALYTIC CAMERAS ²					NUMBER OF LPR LANES ³							
		AS ONLY ⁴	FR + AS ⁶	COD ONLY ⁴	COD + AS ⁶	COD + AS + FR ⁵	COD + AS ⁵ + VFD ⁶	COD + AS ⁵ + VFD ⁶ + FR	DEFAULT MODE				PERFORMANCE MODE ⁷			
									5FPS <16 KM/H	10 FPS <48 KM/H	20 FPS <100 KM/H	30 FPS <150 KM/H	5FPS <16 KM/H	10 FPS <48 KM/H	20 FPS <100 KM/H	30 FPS <150 KM/H
Premium Plus	-	220	120	35	34	30	15	14	68	42	21	14	56	28	14	9
	1 × AINVR2-PRM-PLUS-FORM-H-ANK	200	120	70	68	60	30	28	85	42	21	14	106	53	26	17
Premium	-	200	70	9	9	8	5	4	34	23	11	7	34	21	10	7
	1 × AINVR2-PRM-PLUS-FORM-H-ANK	200	120	47	45	38	20	18	46	23	11	7	89	48	24	16
	1 × AINVR2-PRM-PLUS-FORM-H-ANK	200	120	57	57	20	35	32	46	23	11	7	119	59	29	19
Value	-	-	-	-	-	-	-	-	17	8	4	2	-	-	-	-
	1 × AINVR2-PRM-PLUS-FORM-H-ANK	90	31	4	4	3	2	1	16	10	5	3	16	14	7	4
	1 × AINVR2-PRM-PLUS-FORM-H-ANK	90	70	9	9	8	5	4	20	10	5	3	34	21	10	7

Key features

-  Avigilon analytics for third-party cameras
-  Easy upgrades and device management
-  Simple deployment with pre-configured Avigilon Unity Video
-  Single contact for end-to-end technical support

Learn more



¹ Refers to the maximum number of channels at maximum cumulative throughput.

² Based on validation testing by Avigilon. Assumes appliance-wide average per camera rates of classified objects leaving the field of view.


³ Assumes a 3MP camera with 1MP license plate scan area and Frames Per Second (FPS) to recognize license plates up to vehicle speeds in Kilometers Per Hour (KM/H). Results may vary according to camera mounting parameters.

⁴ For cameras at 2MP and 30 frames per second (fps). Requires ACC 7.14.32 / Unity Video 8.3.0.

⁵ Requires H6A, H5A, H4A cameras, or Classified Object Detection (COD) running on non-analytic cameras.

⁶ When enabling Visible Firearm Detection (VFD), disable analytics on the Avigilon camera, enable COD and count the camera as a non-analytic camera.

⁷ Requires License Plate Recognition (LPR) performance mode to be enabled. Available with ACC version 7.14.6 or later. LPR Performance mode will limit other analytics on your AI NVR 2. See the AI NVR 2 user guide for more information.



NVR6

Handle heavy-duty video workloads and longer retention capabilities without sacrificing performance. The sixth-generation Avigilon Network Video Recorder (NVR6) is a comprehensive video security system that delivers where it matters: performance, reliability and security. Choose from 16 TB to 440 TB storage options in a single NVR, supporting up to 400 cameras for recording and 220 cameras for Appearance Search.

Specifications



GENERATION	NVR6	NVR6	NVR6	NVR5
MODEL NAME	PREMIUM PLUS Form H	PREMIUM Form D	STANDARD Form D	VALUE Form D
Part Number	NVR6-PRM-PLUS-FORM-H- C TB-S22	NVR6-PRM-FORM-D- C TB-S22	NVR6-STD-FORM-D- C TB	NVR5-VAL- C TB
Storage capacity C	200 240 280 360 440 TB	72 96 120 160 200 TB	16 24 32 48 64 TB	6 12 16 24 TB
OS	Windows Server 2022	Windows Server 2022	Windows 10 v21H2, Windows Server 2022	Windows 10 v21H2
Out-of-band management	iLO Advanced	iDRAC 9 Enterprise		iDRAC 9 Express
Support	5YR, 4HR, Mission critical	5YR, 4HR, Mission critical	5YR Next business day	3YR Next business day
Networking	4x1G & 4x10G SFP+	6x1G & 4x10G SFP+	6x1G	2x1G
Recording rate¹	220 to 400 ch @ 1500 to 2700 Mbps ³	200 ch @ 1500 Mbps	130 ch @ 900 Mbps	35 to 46 ch @ 450 to 550 Mbps
Live stream rate¹	220 to 400 ch @ 1500 to 2700 Mbps ³	600 ch @ 1500 Mbps	600 ch @ 800 Mbps	70 to 90 ch @ 450 to 550 Mbps
Playback rate¹	50 to 100 ch @ 340 to 680 Mbps ³	80 ch @ 600 Mbps	80 ch @ up to 600 Mbps	40 to 45 ch @ 250 to 300 Mbps
Analytic channels supported for Appearance Search	220 ³	200	90	0 to 46 ²
+ Facial Recognition	60	50	50	0 to 46 ²
License Plate Recognition @10FPS (<48 KM/H)	30 lanes	20 lanes	11 lanes	7 lanes
Redundancy	RAID60	RAID6		RAID5

Key features

- AI-powered analytics support
- Reliable data storage for heavy-duty workloads
- Flexible & scalable storage up to 440 TB
- Quick deployment with pre-configured Avigilon Unity Video
- Strengthened cybersecurity
- Single contact for end-to-end technical support


Learn more



¹ Refers to the maximum number of channels at maximum cumulative throughput.

² Refer to the Datasheet for the analytics kit required.

³ ACC 7.14.32.10 / Unity Video 8.3.0 Required. Pre-installed with Avigilon Control Center 7. The Unity Video 8 installer is available on the machine for upgrade.



Workstations

Experience superior performance and reliability by accessing video from multiple NVRs with the Remote Monitoring Workstation or combine a network video recorder and a client workstation into one powerful NVR5 Workstation. The workstations are now equipped with upgraded 12th-generation Intel processors that enable more efficient recording, reliability and video playback capabilities.



Specifications

MODEL NAME		NVR5 WORKSTATION		REMOTE MONITORING WORKSTATION	
Part Number		NVR5-WKS-4TB	NVR5-WKS-8TB	RM7-WKS-4MN	RM7-WKS-2MN
Video Playback Performance	2 MP @ 30 fps	18 Primary Streams		22 Primary Streams + 14 Secondary Streams	18 Primary Streams
	4 MP @ 30 fps	18 Primary Streams		22 Primary Streams + 14 Secondary Streams	18 Primary Streams
	8 MP @ 30 fps	4 Primary Streams + 14 Secondary Streams		4 Primary Streams + 32 Secondary Streams	4 Primary Streams + 14 Secondary Streams
	16 MP @ 24 fps	2 Primary Streams + 16 Secondary Streams		2 Primary Streams + 34 Secondary Streams	2 Primary Streams + 16 Secondary Streams
	61 MP @ 7 fps	4 Primary Streams + 14 Secondary Streams		6 Primary Streams + 30 Secondary Streams	4 Primary Streams + 14 Secondary Streams
Supported Monitor		Interfaces Combination of up to 2: mDP, DP, and HDMI (DP and HDMI adapters are supplied)		Combination of up to 4: mDP, DP, and HDMI (DP and HDMI adapters are supplied)	Combination of up to 2: mDP, DP, and HDMI (DP and HDMI adapters are supplied)
Operating System		Microsoft Windows 10 IoT Enterprise LTSC (2021)			
Processor		Intel Core i3 (12th Gen)		Intel Core i5 (12th Gen)	Intel Core i3 (12th Gen)
Memory		8 GB DDR4 RAM		32 GB DDR4 RAM	8 GB DDR4 RAM
OS Drive		M.2 256 GB PCIe NVMe Class 35 SSD		M.2 256 GB PCIe NVMe Class 35 SSD	
Video Data Drive		1 SATA drive, 4 TB HDD	1 SATA drive, 8 TB HDD	-	-
Storage		256 GB M.2 SSD + 500 GB HDD			
Network Interface		2 × 1 Gigabit Ethernet RJ-45 ports (1000Base-T)		2 × 1 Gigabit Ethernet RJ-45 ports (1000Base-T)	
Video Outputs		2 active (4 × mDP)		4 active (4 × mDP)	2 active (4 × mDP)
Optical Drive		DVD-RW			
Graphics				NVIDIA T1000 (8GB)	Intel Integrated graphics

Key features



4K Support*



Recovery Partition



Small Form Factor



Solid-State Drive

Learn more




NVR5



RM7



*Avigilon Unity client software at 200% DPI scaling



NVR6 FIPS

Designed for government agencies and large enterprises – help defend against cyberattacks using the sixth-generation Avigilon Network Video Recorder FIPS (NVR6 FIPS) series. It is pre-hardened to meet FIPS 140-2¹ level 2 standards for secure network video recording and performs data encryption in transit and at rest. Leverage Motorola Solutions' end-to-end FIPS-compliant video security ecosystem with Joint Interoperability Test Command (JITC) Certification² for the Department of Defense (DoD) networks to meet robust cybersecurity requirements.

Specifications



MODEL NAME	PREMIUM FIPS FORM D	STANDARD FIPS FORM D
Part Number	NVR6-PRM-FIPS-FORM-D- C TB	NVR6-STD-FIPS-FORM-D- C TB
Storage Capacity (TB) C	72 96 120 160 200 TB	16 24 32 48 64 TB
Windows OS	Server 2019 LTSC (STIG-Compliant) - 16 core	
Out-of-band management	iDRAC 9 Enterprise (network disabled for FIPS compliance)	
Support	5YR, 4HR, Mission critical	5YR Next business day
Networking	6x1G & 4x10G SFP+	6x1G
Redundancy	RAID6	

Key features



Government-compliant manufacturing



Certified infrastructure on government networks



AI-powered analytics support



Reliable data storage



Single contact for end-to-end support

Learn more



¹ FIPS 140-2 Encryption is currently available only for Avigilon Unity Video (Formerly Avigilon Control Center™) Version 7.

² Avigilon video security solutions are certified by the Joint Interoperability Test Command for the Department of Defense. Refer to the [JITC Press Release](#). Avigilon Video security solutions have been added to the Department of Defense's Information Network Approved. Products List (DoDIN APL). Refer to [DoDIN APL Press Release](#).



ENVR2 PLUS Appliance

Unlock AI-powered video analytics with Avigilon’s compact ENVR2 PLUS, compatible with any connected video stream and ideal for edge deployments.





Specifications


MODEL NAME	ENVR2 PLUS
Part Number	ENVR2-PLUS-8P8/8P4
Analytics features	Appearance Search, Facial Recognition, Classified Object Detection, License Plate Recognition
Built-In PoE ports (Total Power Budget)	8 (125W)
Storage capacity	1 × 3.5" SATA 3 hard drive, 4 TB or 8 TB
Throughput (Recording/Playback in Mbps)	130 / 80
Operating temperature	0° C to 50° C (32° F to 122° F)
Dimensions (L x W x H)	195 mm × 254.5 mm × 44.45 mm (7.67" x 10.0" x 1.75")

Key features

- 

Appearance Search on third-party cameras
- 


Scale, speed and security
- 

Remote site upgrade
- 

Optimal WAN usage

Learn more





HD Video Appliance 3X (HDVA3X)

Achieve a simplified security system while reducing installation time and complexity with the Avigilon HDVA3X. Enjoy a seamless and hassle-free experience managing your security systems with our one-stop, preconfigured solution.

Specifications



MODEL NAME	HDVA3X 8-PORT	HDVA3X PRO 16-PORT	HDVA3X PRO 24-PORT
Part Number	VMA-AS3X-8P	VMA-AS3X-16P	VMA-AS3X-24P
Storage Capacity	2TB, 4TB, 8TB	6TB, 9TB, 12TB	12TB, 18TB, 24TB
Operating System	Microsoft Windows 10 IoT Enterprise v21H2 LTSC Optional Microsoft Windows Server 2019 LTSC Upgrade Kit (AS3X-S19-UPG) available		
Total PoE Output	Up to 30W/Port (120W Total)	Up to 30W/Port (240W Total)	Up to 30W/Port (360W Total)
Max. Recording Throughput	Up to 100 Mbps	Up to 300 Mbps	
Max. Number of Video Data Hard Drives	1 × 3.5" SATA	RAID 5 — Up to 4 × 3.5" SATA	
Out-of-band Management	Optional IPMI Module (VMA-AS3X-IPMI) available		

Key features

- 

Out-of-band management
- 

Improved scale, speed and security
- 

Video Analytics support
- 

Local viewing


Learn more





Avigilon Video Archive

Cost-effective storage option that provides a path for expanding video archives incrementally over time, delivering exceptional reliability with near-zero downtime.



Specifications

MODEL NAME		AVIGILON VIDEO ARCHIVE					
Part Number		AVA-HED1- C TB ¹			AVA-EXP1- C TB ¹		
Storage Capacity (TB) C		225	488	751	263	526	789
Form Factor		5U					
Max. Number of NVRs Connected		4 per Head Unit when attached directly; 12 per Head Unit when using 2 network switches ²					
Redundancy		Erasure coding					
Connectivity		iSCSI					

Key features



Erasure Coding technology



Avigilon Unity Video



Storage Area Network technology



Failover and load balancing


Learn more



¹ Head units house the controllers that connect either directly with up to 4 NVRs or indirectly with up to 12 NVRs using 2 network switches. Expansion units need to be installed in the same rack and connected to Head Units to expand the capacity up to 1.5PB.

² 12 NVRs must be connected through 2x 10GbE SFP+ network switches to ensure redundancy. The switches are not sold by Avigilon and should be sourced by the customer. Each switch must support at least 12x Downlink ports (1 per NVR) and 4x Uplink ports.

Part number varies based on total storage capacity **C**.



AI Appliance 2

Enhance the security of your site by incorporating Avigilon AI-powered video analytics on third-party and Avigilon’s non-analytic cameras.



Specifications

MODEL NAME			AI APPLIANCE 2	
Part Number		VMA-AIA2-CG1		VMA-AIA2-CG2
Max. Number of Channels		25		50
Number of Channels Included		10		30
Form Factor		2U rack mount		
Local Monitor Output Support		No		
Embedded Network Switch		No		

Camera & analytics support

MODEL	NON-ANALYTIC CAMERAS¹				
	Classified Object Detection Only³	OR	Classified Object Detection + Appearance Search²	OR	Classified Object Detection + Appearance Search² + Facial Recognition
AI Appliance 2 CG2	50		50		43
AI Appliance 2 CG1	25		25		22

Key features

-  Managed solution
-  Enhanced security
-  Easy appliance management

Learn more



¹ These performance figures are based on validation testing by Avigilon, using Avigilon Unity Video software version 7.6.4. Assumes appliance-wide average per camera rates of classified objects leaving the field of view:

- H5A cameras: one every second
- H4A cameras: one every two seconds
- Non-analytics cameras running Classified Object Detection: one every second

² Additional licenses may be required. For more information, contact Avigilon Sales.

³ For cameras at 2 MP and 30 images per second (ips).



IP Horn Speaker

The IP Horn speaker integrates with Avigilon Unity Video software, equipping operators with superior situational awareness to address trespassing or deter intruders.



Specifications

MODEL NAME	IP HORN SPEAKER 2
Part Number	ACC-SPEAKER
Power Source	PoE/PoE+
Power Consumption	13 W (Using PoE), 22 W (Using PoE+)
Amplifier Rated Output	8 W (Using PoE), 15 W (Using PoE+)
Sensitivity	112 dB (1 W, 1 ml (500 Hz - 2.5 kHz, peak level) 124 dB (at PoE+ powered, 15 W, 1 ml (500 Hz - 2.5 kHz, peak level) 121 dB (at PoE powered, 8 W, 1 ml (500 Hz - 2.5 kHz, peak level I
Frequency Response	280 Hz - 12.5 kHz
Sampling Frequency	8 - 48 kHz
Audio Compression Method	G.711u/a, G.722, L16 (8 - 48kHz)
Environmental	IP66
Operating Temperature	30 'C to +55 'C (-22 'F to +131 'F
Warranty	5-year warranty

Key features



Unity Video Integration



Built-In Microphone




Water & Dust Protection



Wide Temperature Range

Learn more





Alta Cloud Connectors

Alta Cloud Connectors make existing cameras smart with uniquely scalable, real-time AI and provide a frictionless transition to the cloud.



Specifications

MODEL NAME	A500	A750	A1000	A2000	A3000
PART NUMBER	APP-500-8-DG APP-500-16-DG	APP-750-32-DG	APP-1000-24-DG APP-1000-48-BT	APP-2000-80-BT APP-2000-160-BT APP-2000-80-SFP APP-2000-160-SFP	APP-3000-80-BT APP-3000-160-BT APP-3000-80-SFP APP-3000-160-SFP
Type	Workstation Appliance	Workstation Appliance	Workstation Appliance	2U Rack-mounted	2U Rack-mounted
Hard Disks	3	3	4	12	12
Cameras Supported	Up to 25	Up to 50	Up to 75	Up to 100	Up to 200
GPU	Nvidia GeForce	Nvidia GeForce	Nvidia Quadro RTX	Nvidia Quadro RTX	2 x Nvidia Quadro RTX
SATA Storage	Up to 24TB raw, 16TB net	Up to 48TB raw, 32TB net	Up to 64TB raw, 48TB net	Up to 192TB raw, 160TB net	Up to 192TB raw, 160TB net

Key features



Extend real-time AI to third party cameras



Bring cloud benefits to existing cameras and sensors



Monitor and manage your entire deployment in a single interface



Provides resilience and local access to video



Enhanced security with encryption and dedicated TPM

Learn more




Cloud connector accessories

Type	PART NUMBER
Mounting Rack for A1000	APP-RCK-1000
UK Power Cable	AACC-PWC-UKS
US Power Cable	AACC-PWC-USS
EU Power Cable	AACC-PWC-EUS
IEC C13-C14 Power Cable	AACC-PWC-IECS
4TB Replacement Drive	AACC-DRV-04TB
8TB Replacement Drive	AACC-DRV-08TB
12TB Replacement Drive	AACC-DRV-12TB
16TB Replacement Drive	AACC-DRV-16TB



Body-worn Cameras

Commercial organizations need a mobile video security solution that protects people and proves professionalism. Cutting-edge body-worn cameras from Motorola Solutions capture high-quality audio and video from the wearer's perspective. Seamless integration with Avigilon Unity Video software via WiFi enhances situational awareness in the control room, delivering a powerful new narrative and enabling a smarter response.



VT100 Cameras

Designed to complement your current security function, providing additional body-worn protection to staff throughout any organization. Available for global use in commercial applications.



Specifications

Model Name		VT100
Part Number		VT-100-N
Features	Dimensions (H x W x D)	3.1 x 2.0 x 0.9 in (80 x 51 x 22 mm)
	Weight	2.54 oz (72 g)
	Charging	Up to five hours from fully flat battery
	Bluetooth	No
Video	Recording Storage	16 GB
	Recording Time	Up to three hours
	Battery On Standby	Six months
	Battery Type	Lithium-Ion
	Horizontal Field of View	130 degrees
	Peer-Assisted Recording	No
WiFi	WiFi Specification	802.11 b/g/n (2.4 GHz & 5 GHz)
	WiFi Security	WPA2-PSK
	WiFi Streaming	640x360 15 fps. Compatible with ONStream.

Key features

-  RFID Assignment
-  Integrates with VideoManager Software


-  WiFi Enabled
-  Up to Six Months Stand-By Battery

Learn more



Security & certification

Storage Media	Internal solid state
Access	Sealed unit, no user access to storage media or battery
EMC Certification	Yes
FCC Certification	Yes
CE Certification	Yes
Environmental Certification	IP54 weather rating



VB400 Cameras

Ruggedized camera with advanced recording and communications features enabling security professionals in commercial organizations to perform their best when it matters most.



Specifications

Model Name		VB400
Part Number		VB-400-64 F
Features	Dimensions (H x W x D)	2.7 x 3.5 x 1.04 in (68 x 89 x 26.6 mm)
	Weight	5.7 oz (162 g), plus mounting
	Charging	Up to eight hours from fully flat battery
	Bluetooth	BT 2.1 + EDR, BLE 4.2
Video	Recording Storage	64 GB
	Recording Time	Up to 12 hours
	Battery On Standby	48 hours
	Battery Type	Lithium-Polymer
	Horizontal Field of View	120 degrees
	Peer-Assisted Recording	Within 32.8 ft (10 m) of another device
WiFi	WiFi Specification	802.11 a/b/g/n (2.4 GHz & 5 GHz)
	WiFi Security	WPA2-PSK
	WiFi Streaming	640 x 360, 25 or 30 fps

FIXING AND MOUNT OPTIONS F		
QR-N	Quick Release Fixing	Suitable for attaching to the quick release fixing options
KF-N	Klick Fast Harness	Suitable for directly attaching to the Klick fast fixing options
VF-N	Close-Fit Mount	Suitable for attaching to the close fit mount options
ALIG	Alligator Clip	Comes with a factory fitted alligator clip

Key features

-  RFID Assignment
-  Configure up to 2 Minutes of Pre-Recording
-  Internal GPS Receiver
-  Holster Sensor
-  Bluetooth
-  Records for Up to 12 Hours

Learn more



Security & certification

Storage Media	Internal solid state
Access	Sealed unit, no user access to storage media or battery
EMC Certification	Yes
FCC Certification	Yes
CE Certification	Yes
Environmental Certification	IP67 weather rating

Part number varies based on fixing or mount options **F**.



Body-worn Camera Accessories

There are a variety of accessories to ensure your body-worn camera can be fixed securely to any uniform or clothing.



Compatibility

Model Name	VB-400 with Quick Release Back	VB-400 with Klick Fast Back	VB-400 with Close Fit Back	VB-400 with Alligator Clip	VT100
Part Number	VB-440-64-QR-N	VB-440-64-KF-N	VB-440-64-VF-N	VB-440-64-ALIG	VT-100-N
Custom VB400 Front-button Sticker (Design) (VB-400-ID-CUS-ART)	Compatible	Compatible	Compatible	Compatible	
Custom VB400 Front-button Sticker (Print) (VB-400-ID-CUS-100 or 250/1000/5000)	Compatible	Compatible	Compatible	Compatible	
Klick Fast Quick Release Stud (VB-400-QR-KFSTUD)	Compatible				
Klick Fast Quick Release Tilt Mount (VB-400-QR-KFTILT)	Compatible				
Klick Fast Quick Release Wide Tilt Mount (VB-400-QR-KFTILT2)	Compatible				
Quick Release Sports Camera Pillar (VB-400-QR-SPORT)	Compatible				
Klick Fast 3-Point Chest Harness (KF-HARN3) ¹	Compatible	Compatible			
Klick Fast 4-Point Chest Harness (KF-HARN4) ¹	Compatible	Compatible			
Klick Fast Shoulder Harness (KF-HARN5) ¹	Compatible	Compatible			
Klick Fast Uniform Screw-on Dock (KF-SCREW) ²	Compatible	Compatible			
Klick Fast Radio Loop Dock (KF-LOOP) ²	Compatible	Compatible			
Klick Fast Dock Clamp (KF-DOCKCLAMP) ²	Compatible	Compatible			
Klick Fast Dock Epaulette (KF-DOCKEP) ²	Compatible	Compatible			
Klick Fast Magnetic Mounting Set (w/o magnet) (KF-MAGMOUNT) ²	Compatible	Compatible			
Klick Fast Dock for MOLLE Vests (KF-MOLLEVEST) ²	Compatible	Compatible			
Close-Fit Magnetic Mount (VB-400-VF-MAG)			Compatible		
Close-Fit Double MOLLE Mount (VB-400-VF-MOL2)			Compatible		
Custom VT100 Front-panel ID Card (Design) (VT-100-ID-CUS-ART)					Compatible
Custom VT100 Front-panel ID Card (Print) (VT-100-ID-CUS-250 or 1000 /5000)					Compatible
VT100 Rotatable Long Alligator Clip (VT-100-FIX-ALIG)					Compatible
VT100 Epaulette (Shoulder) Clip (VT-100-FIX-EP)					Compatible
VT100 Sports Camera Pillar (VT-100-FIX-SPORT)					Compatible
VT100 Klick Fast Stud (VT-100-FIX-KF-ALT)					Compatible
Lanyard with 5 Breakpoints and 2 Loops (AC-LANYARD-05)					Compatible

*Based on AC-LANYARD-05.

¹ Klick Fast Harnesses are compatible with the VB-440-64-QR-N when used in conjunction with Klick Fast Quick Release Fixings. Also available for the VB-440-64-KF-N camera.

² Available for the VB-440-64-QR-N when used in conjunction with Klick Fast Quick Release Fixings.

Body-worn Camera Docks

For downloading of video and rapid charging of body-worn cameras.

Specifications




MODEL NAME	VT100 1-PORT DOCK	VT100 14-PORT DOCK	VB400 1-PORT DOCK	VB400 14-PORT DOCK
Part Number	VT-100-SOLO	VT-100-DOCK14 ¹	VB-400-DOCK-SOLO	VB-400-DOCK14 ²
Dimensions (H x W x D)	2.95 x 3.54 x 1.57 in (75 x 90 x 40 mm)	1.5 x 7.87 x 17.17 in (38 x 200 x 436 mm)	2.95 x 3.54 x 1.57 in (75 x 90 x 40 mm)	1.5 x 7.87 x 17.17 in (38 x 200 x 436 mm)
Weight	8.6 oz (244 g)	4.85 lb (2.2 kg)	8.6 oz (244 g)	4.85 lb (2.2 kg)
Scalability	Up to four 1-Port Docks can be connected to a DockController	Multiple docking stations can be connected to a single PC or DockController	Up to four 1-Port Docks can be connected to a DockController	Multiple docking stations can be connected to a single PC or DockController
Charging	This dock can charge a VT100 in up to five hours from a fully flat battery	This dock can charge a VT100 in up to five hours from a fully flat battery	This dock can charge a VB400 in up to eight hours from a fully flat battery	This dock can charge a VB400 in up to eight hours from a fully flat battery
Connection	Single USB to PC	Single USB to PC or DockController, and a mains adaptor for power	Single USB to PC	Single USB to PC or DockController, and a mains adaptor for power
Power Requirement	5V USB	12V/5A PSU, input 100-240V (PSU supplied)	5V USB	12V/5A PSU, input 100-240V (PSU supplied)

Learn more



¹ Part number varies based on power outlets: VT-100-DOCK14/US, VT-100-DOCK14/UK, VT-100-DOCK14/EU, VT-100-DOCK14/ROW.

² Part number varies based on power outlets: VB-400-DOCK14/US, VB-400-DOCK14/UK, VB-400-DOCK14/EU, VB-400-DOCK14/ROW.



RFID Reader & Accessories

Connect an RFID reader to a DockController device to make body-worn camera allocation quicker and easier, using your organization's existing ID or access cards.



Specifications

MODEL NAME		RFID READER
Part Number		RF-220
General Information	Typical Usage	Attached to a DC-200 via USB connection
	Management Software	VideoManager
	Warranty	1 year return to manufacturer warranty
	Snap-in Holder	The Snap-in Holder is used to fix the RF-220 to a flat surface
Size & Weight	Dimensions (H x W x D)	3.5 x 2.2 x 0.7 in (88 x 56 x 18 mm)
	Weight	4.1 oz (115 g)
Technical Specifications	Frequency	Low Frequency: 134.2 kHz, High Frequency: 13.56 MHz
	Read / Write Distance	4 in (100 mm) for both Low Frequency and High Frequency
	Supported Compatible Card Standards	Including but not limited to: ISO1443A (e.g. MIFARE Classic) ISO14443B (e.g. HID iCLASS) ISO15693 (e.g. HID iCLASS SE) Unity Access door access cards

Key features



Secure & Efficient
Camera Allocation



No Need to
Log in Each Time



Automatic Association
Between Camera & User


Learn more



RFID Reader Accessories

Type	Part Number
RFID Sticker-Style Tag (x10)	RF-STICKER-10
RFID-Card (x10)	RF-CARD-10

RFID Readers and accessories are compatible with VT100 & VB400 body-worn cameras



Dock Controller

Simultaneously manage up to 84 body-worn cameras while also assigning them to operators using VideoManager software.



Specifications

MODEL NAME		DOCK CONTROLLER
Part Number		DC-200/ R
General Information	Typical Usage	Connected to VideoManager over Ethernet, with multiple docks attached via USB
	Management Software	VideoManager
	Warranty	1 year return to manufacturer warranty
Size & Weight	Dimensions (H x W x D)	6.1 x 5.3 x 1.5 in (154 x 136 x 37 mm)
	Weight	23.3 oz (660 g)
Scalability	Body-Worn Camera Support	Connect up to 84 body-worn cameras to one DC-200. Ideal for use with 14-port docks. Can also be used with up to 4 individual 1-port docks.
	Unlimited VideoManager Connectivity	There is no limit on the number of DC-200s that can be connected to an instance of VideoManager
Technical Specifications	Operating Temperature	32 to 104 °F (0 to 40 °C)
	Storage Temperature	-67 to +158 °F (-55 to +70 °C)
	Input Voltage (to supplied external power supply)	100 - 240V, 47 - 63Hz
	Maximum Power Consumption	20W
Connectivity	High-Speed Footage Downloads	Gigabit Ethernet Port (1000/100/10 mbps) for rapid footage download and body-worn camera assignment
	RFID-Compatible	Attach an RFID reader to one of the DC-200's USB ports to enable quick body-worn camera assignment
	Bandwidth Restrictions	Apply bandwidth rules to individual DC-200s to control how much footage is uploaded to VideoManager, and when
	High-Priority Configuration	Prioritize certain DC-200s to ensure that their footage is downloaded to VideoManager first
	Slow Connection Configuration	DC-200s with this setting enabled will continuously try to offload footage to VideoManager, ignoring the bandwidth limit
	Shared Bandwidth Groups	Add multiple DC-200s to one bandwidth group to ensure that the bandwidth limit is shared equally between them

Key features



Connect up to 84
Body-Worn Cameras




Supports RFID Touch-Assign


Learn more



Regional compatibility

US	United States
UK	United Kingdom
EU	Europe
AUS	Australia
ROW	Rest of World

Part number varies based on regional compatibility .



Motorola Solutions Integrations

Motorola Solutions integrations offer an integrated approach to fixed video and security applications. Experience an unparalleled ecosystem that unifies voice, video, data, analytics and software.



Concealed Weapons Detection

Motorola Solutions Concealed Weapons Detection (CWD)*, powered by Evolv Technology, helps to proactively keep people and assets safe by using advanced sensors and artificial intelligence to detect a wide range of concealed weapons and threats. It is the world's first and only touchless security screening solution that is conducive to supporting post-pandemic security screening requirements.



Specifications

Physical		Indoor Models		Outdoor Models	
		Standard Width	Wide Width	Standard Width	Wide Width
Width	Single-Lane	66.7 in (169.4 cm)	74.7 in (189.7 cm)	70.1 in (178.1 cm)	78.1 in (198.3 cm)
	Dual-Lane	116.4 in (295.7 cm)	132.4 in (336.2 cm)	116.7 in (296.4 cm)	132.6 in (336.7 cm)
Depth		40.3 in (102.4 cm)	40.3 in (102.4 cm)	46.8 in (118.9 cm)	46.8 in (118.9 cm)
Lane Opening	At Base	32.0 in (81.3 cm)	39.8 in (101.0 cm)	28.9 in (73.5 cm)	36.4 in (92.4 cm)
	Above Base	42.0 in (106.7 cm)	49.8 in (126.4 cm)	38.9 in (98.8 cm)	46.4 in (117.9 cm)
Height	TX Tower	74.1 in (188.1 cm)	74.1 in (188.1 cm)	74.7 in (189.8 cm)	74.7 in (189.8 cm)
	RX Tower	73.7 in (187.2 cm)	73.7 in (187.2 cm)	73.7 in (187.2 cm)	73.7 in (187.2 cm)
	Mat	0.9 in (2.3 cm) at top 0.2 in (0.5 cm) at front lip	0.9 in (2.3 cm) at top 0.2 in (0.5 cm) at front lip	0.9 in (2.3 cm) at top 0.2 in (0.5 cm) at front lip	0.9 in (2.3 cm) at top 0.2 in (0.5 cm) at front lip
Weight	TX Tower	201.25 lbs. (91.28 kg)	201.25 lbs. (91.28 kg)	216.95 lbs. (98.40 kg)	216.95 lbs. (98.40 kg)
	RX Tower (2x)	53.1 lbs. (24.08 kg) each	53.1 lbs. (24.08 kg) each	53.1 lbs. (24.08 kg) each	53.1 lbs. (24.08 kg) each
	Mat and Cables (2x)	11.5 lbs. (5.2 kg) each	13.5 lbs. (6.12 kg) each	11.5 lbs. (5.2 kg) each	13.5 lbs. (6.12 kg) each
	Wireless Tablet & Floor Stand (2x)	28.5 lbs. (12.9 kg) each	28.5 lbs. (12.9 kg) each	28.5 lbs. (12.9 kg) each	28.5 lbs. (12.9 kg) each
	Wireless Tablet & Desktop Stand (2x)	6.5 lbs. (2.9 kg) each	6.5 lbs. (2.9 kg) each	6.5 lbs. (2.9 kg) each	6.5 lbs. (2.9 kg) each
	Total System Weight (Single-lane)	300.85 lbs. (136.36 kg)	302.85 lbs. (137.28 kg)	316.55 lbs. (143.48 kg)	318.55 lbs. (144.4 kg)
	Total System Weight (Dual-lane)	400.45 lbs. (181.65 kg)	404.45 lbs. (183.75 kg)	416.15 lbs. (188.77 kg)	420.15 lbs. (190.87 kg)
Electrical					
Power		115VAC - 230VAC (+/-10%); single phase; with power cord supplied			
Power Consumption		200W max power consumption			
Components					
Cameras		2 situational awareness cameras (front and rear) ¹			
Tablet Display		15.6inch display (39.6cm) , 2 per lane (1 Floor and 1 Desktop Stand)			
Standard or Outdoor tablets based on optional Outdoor unit					

Key features

- Smart, AI-Based Sensor Platform
- Easy To Operate
- Respectful, Hassle-Free Experience
- Flexible Deployment Options

Learn more



Physical configuration


CONFIGURATION	DESCRIPTION
2 lane	From the perspective of the security operator watching people exit the towers, the receiver towers are on both sides of the center transmitter tower.
1 lane, Right Side	From the perspective of the security operator watching people exit the towers, the receiver tower is on the right side of the transmitter tower.
1 lane, Left Side	From the perspective of the security operator watching people exit the towers, the receiver tower is on the left side of the transmitter tower.

*Available to customers only in North America.

¹ Camera ports are isolated from Express internal and external networks.

Orchestrate

An intuitive, cloud-based interface tool to configure, automate and manage workflows that control Motorola Solutions' integrated security and safety technologies. Orchestrate helps automate your security operations by seamlessly integrating into Avigilon's on-premise and cloud solutions.

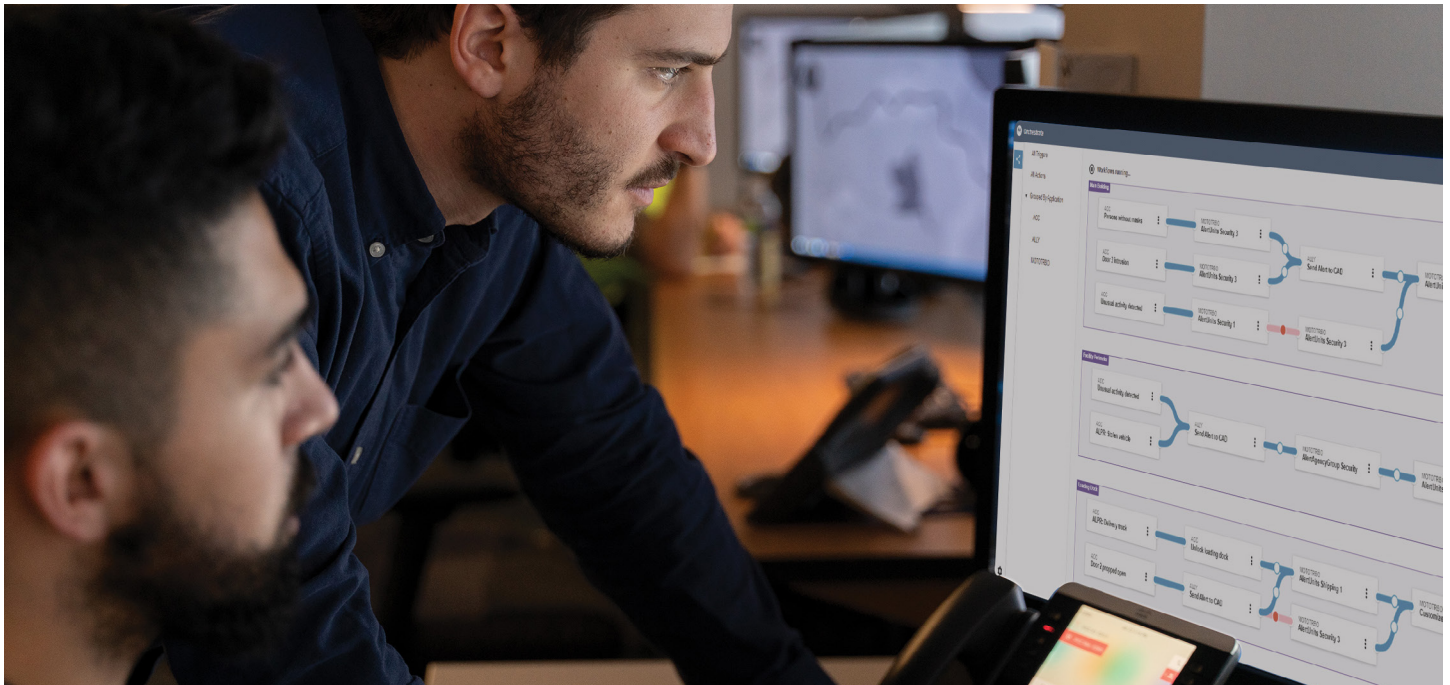

Why choose orchestrate?

Our unified technology ecosystem spans end-to-end incident scenarios on one platform, enabling cross-team communication and automatic workflows for a faster response. AI and digital business logic allows personnel to detect, analyze, communicate and manage events more efficiently, and through proactive decision making, can even prevent incidents from escalating in the first place.



Use Orchestrate to expedite incident detection and respond faster with automated radio alerts triggered by video analytics events using the integration with Avigilon Alta and Unity video solutions.



Streamline access control operations and automate control of wireless locks to deny or allow access to individuals using the integration with Avigilon Alta and Unity access control systems.

Key features



Integrated Workflows



Enterprise Cloud Platform



Analytics-Driven Logic


Learn more



Rave Mobile Safety Suite

For a large enterprise organization who wants to deliver more effective communications, Rave Mobile Safety Suite offers easy-to-use solutions for critical communication and collaboration that enable you to manage incidents, increase operational resiliency and help save lives.

Currently only available in the U.S.

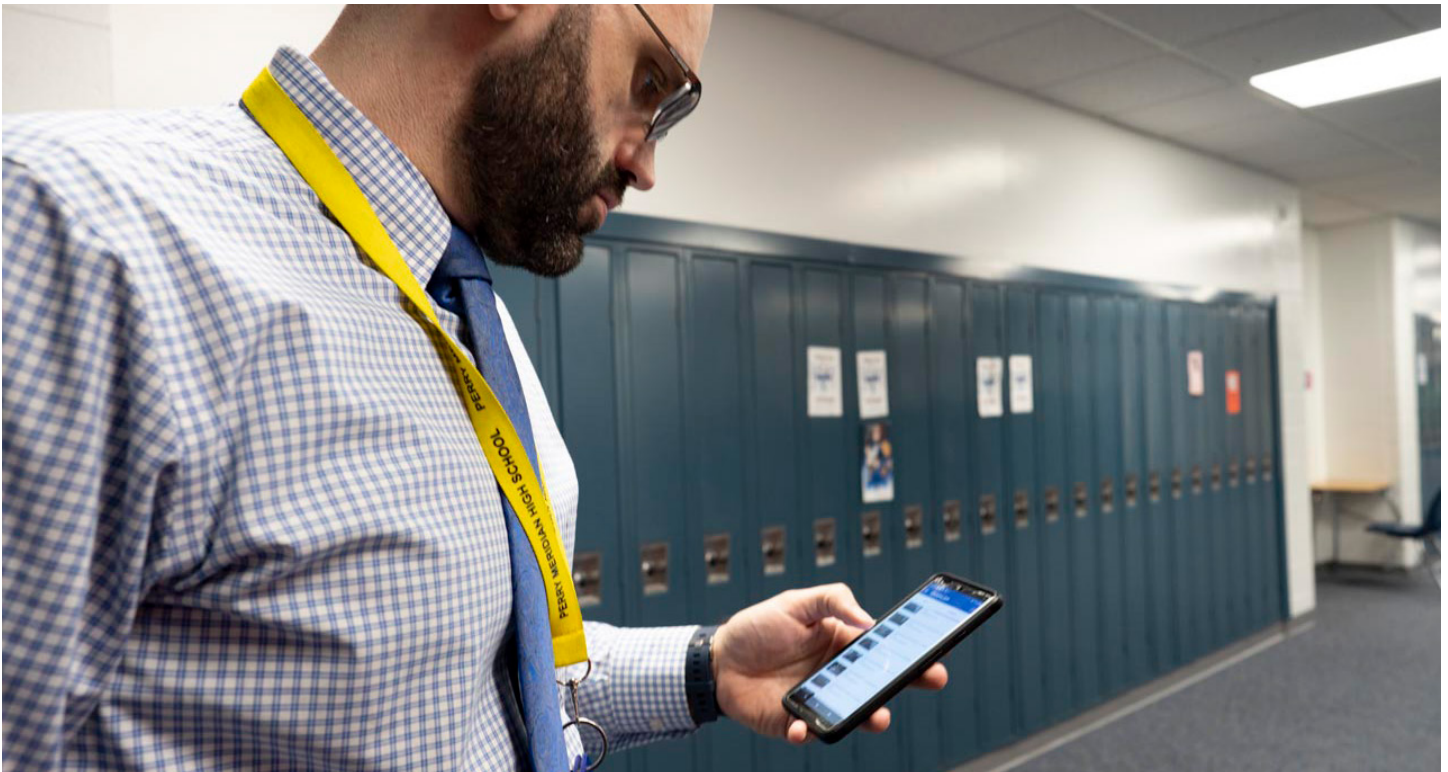

Key features



Easy-to-use platform enables connected incident management



Enable high-volume, multimodal, two-way communications to stay informed




Enhance emergency preparedness and 9-1-1 response



Stay connected and maximize the safety of your employees and facilities.

Learn more






Rave Panic Button

The Rave Panic Button is a leading emergency notification and response solution that delivers instant connection to first responders with the push of a button. The Panic Button empowers you to communicate any type of emergency while simultaneously connecting with on-site personnel and others involved to keep everyone informed and engaged throughout a situation.

Currently only available in the U.S.

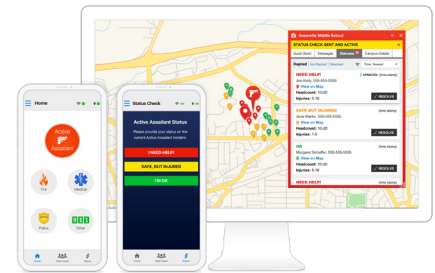

Specifications

PART NUMBER	RAVEPB-SCB-1000-PANIC-PERUSER
System	<p>Intuitive smartphone app available in the Apple App Store and Google Play Store</p> <p>Targeted mass notification delivery through SMS, email, and push notifications</p> <p>Easy to add information such as campus, building and people via Motorola Facility</p>
Device support	<p>iPhone - Requires iOS 14.0 or later</p> <p>Android - Requires Android 10.0 or later</p> <p>Multi-factor authentication</p>
Security and privacy protection	<p>SmartLoader for automated user management</p> <p>Role-based access control</p>
Other features	<p>Available for download on first responder devices</p> <p>Non-emergency messaging through Staff Assist</p> <p>View Panic Button incidents</p> <p>Access map-based solutions</p> <p>Trigger workflows to MOTOTRBO and WAVE devices</p> <p>Staff status checks</p> <p>Support for outbound CAP integrations</p> <p>Automated user management</p>

¹ Per full-time employee

Key features

- | | |
|--|---|
|  Simple and user-friendly interface |  Enable authorized employees to communicate internally in non-emergency situations |
|  Browser-based and mobile responsive system |  Customizable check-ins to request current status, locations and more |
|  Immediate connection to first responders with the push of a button |  Integration with Motorola Solutions' technology ecosystem |
|  Two-way communication with 9-1-1 for a more coordinated response |  FirstNet Verified and US Department of Homeland Security SAFETY Act Certified |

Learn more






Rave Alert

Rave Alert is a leading mass notification system offering reliable, multimodal messages in three clicks. Its easy-to-use interface, seamless device connections and customized communication make it the most efficient and effective solution for emergency and non-emergency messaging.

Currently only available in the U.S.

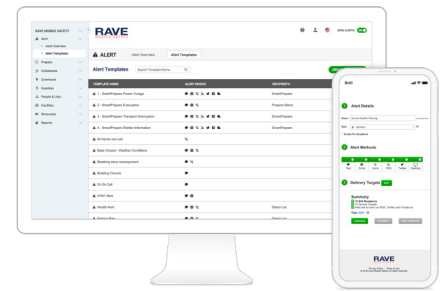


Specifications

PART NUMBER	RAVEPB-SCB-1000-ALERT-PERUSER
	Web-based interface available via any internet-connected device
System	Public safety grade infrastructure Two billion messages sent per year with 99.999% service availability
Support	Dedicated support 24 hours a day, 365 days a year Self-service training portal, including live sessions and in-app tutorials
Security and privacy protection	Single sign-on via LDAP/CAS/SSO/Shibboleth SmartLoader for automated user management Role-based access control SOC 2 Type II attestation
	Targeted notifications Automated weather alerts via the National Weather Service SMS opt-in keywords
Other features	Common Alerting Protocol (CAP) and REST API integrations available Automated notifications Trigger workflows via Orchestrate One-click conference bridging Real-time reporting

¹ Per full-time employee

Key features

- | | |
|--|--|
|  Easy-to-use and mobile friendly interface |  Backed by geo-redundant public safety grade infrastructure |
|  Customized communication for targeted messaging |  Deploy unlimited emergency messages in 100+ languages |
|  Send messages through text, email, social media, desktop alerts and more |  Supports third-party products such as digital signage and audible sirens, supporting CAP |
|  Role-based notifications from a single launch point |  FedRAMP Authorized and US Department of Homeland Security SAFETY Act Certified |

Learn more





License Plate Recognition Solutions

License plate recognition (LPR) systems from Motorola Solutions aren't one-size fits all, but rather designed for specific environmental needs. Our purpose-built applications for enterprise ensure your data is actionable and secure. Add an unmatched layer of efficiency to your parking and security operations with license plate recognition detections, patented vehicle location analytics and plate-based enforcement tools.

VehicleManager Enterprise

Help your team instantly transform license plate recognition data into actionable intelligence with VehicleManager Enterprise. Its integration into Avigilon Unity Video allows businesses to share their license plate reads collected by Unity Video software with law enforcement agencies for quicker investigations.

Through this collaborative license plate-sharing program, businesses can aid law enforcement agencies in detecting and responding to Be-On-the-Lookout (BOLOs) vehicles without directly taking action, ensuring a safer outcome for the community.



Key features

Vehicle & Plate Query

Hotlists & Auth Lists

Data Sharing

Mapping tools

Analytic dashboards

Mobile Companion app

VehicleManager Enterprise is only available in North America at this time. International users will continue to use ClientPortal.

Learn more



L6A Enterprise LPR Camera

Fusing industry-leading video streaming capabilities with cutting-edge LPR technology, scan license plates and stream video footage with the L6A. Built with two lenses, this multipurpose camera accurately captures vehicle data, increases awareness and provides analytical capabilities beyond what a traditional security or LPR camera could do alone.











Specifications

MODEL NAME		L6A ENTERPRISE LPR CAMERA
Part Number		LPR-VSF-L6A-7IR LPR-VSF-L6A-8IR
Resolution		3 MP
Lanes Detected		2
Image Sensor		1/2.9" global shutter color context 1/2.9" global shutter monochrome LPR
Max. Image Rate		30 fps
Max. IR Illumination Distance		75m (250ft)
Environmental		IP67 Weather Rating IK10 Impact Rating

LENS (REMOTE ZOOM AND FOCUS)		
5 - 135 mm, Remote Focus and Zoom, P-Iris	Horizontal Angle of View	(4:3) 60° – 4°
	Vertical Angle of View	(4:3) 45° – 3°
	Minimum Illumination (color / mono)	0 lux with IR

Key features

-  Onboard LPR analytics
-  Dual long-range motorized lenses
-  Long-range LPR at 0 lux
-  Conformant with ONVIF Profile S and M
-  Native VehicleManager Enterprise integration
-  FIPS 140-2 level 3 TPM and Secure Boot
-  H.264, H.265, MJPEG (Color Only)
-  Avigilon Unity Video integration

Learn more



Audio, power & storage

Video Compression Method	H.264, MJPEG (Color Only)
External I/O Terminals	Alarm In, Alarm Out
External Power Source	VDC: 24 V ± 10%
PoE Power Source	POE PD IEEE 802.3at-2009 class 4 (25.50W)
Onboard Storage	32gb with microSD expansion
Onboard Storage	SD/SDHC/SDXC slot (minimum class 4, class 6 or better recommended)

- ¹ This is the part number for the camera module only. Please see accessories page for enclosure and IR illuminator.
- ² This is outdoor rated - the kit includes enclosure.



H4 License Plate Capture (LPC) Kit

Uses IR illumination, visible light filtering and license plate recognition analytics to capture license plates at typical vehicle speeds in varying lighting conditions.



Specifications

MODEL NAME		H4 LPC
Part Number ¹		3.0C-HD-LP-B1
Resolution		3 MP
Image Sensor (progressive scan CMOS)		1/2.8"
Max. Dynamic Range		–
Maximum Capture Speed		100 km/h (62 mph)
Max. IR Illumination Distance (single lane / dual lane)		30 m (100 ft) / 14 m (46 ft)
Environmental		IP66 weather rating ²

LENS (REMOTE ZOOM AND FOCUS)		
4.7–84.6 mm, F1.6, P-Iris	Angle of View	3.5° – 59°
	Minimum Illumination (mono)	0 lux

Key features



Maximum image rate of 30 fps



Compliant with ONVIF Profile S



H.264 HDSM SmartCodec Technology, Motion JPEG

Learn more



Audio, power & storage

Audio Compression Method	G.711 PCM 8 kHz
Audio Input/Output	Line level input/output
External I/O Terminals	4 alarm in, 2 alarm out
External Power Source	VDC: 12 V, VAC: 24 V
PoE Power Source	2x IEEE 802.3at Class 4 PoE+
Onboard Storage	SD/SDHC/SDXC slot (minimum class 4, class 6 or better recommended)

¹ This is the part number for the camera module only. Please see accessories page for enclosure and IR illuminator.
² This is outdoor rated - the kit includes enclosure.



L6Q LPR Camera System

The Motorola Solutions L6Q license plate reader gives you eyes on the road for added safety and security. Combining LPR technology with simple installation and ease of use, this camera can scan license plates on vehicles moving up to 100 mph (161 kmh) in its entire field of view, even in total darkness. Paired with VehicleManager Enterprise, the L6Q adds a layer of efficiency to your security and parking operations with patented analytics and configurable data-sharing capabilities.





Specifications


MODEL NAME		L6Q QUICK-DEPLOY LPR CAMERA SYSTEM
Part Number ¹		LPR-VSFS-L6Q-P-SUB LPR-VSFS-L6Q-S-SUB LPR-VSF-L6Q-P-KIT LPR-VSF-L6Q-S-KIT
Resolution		1920 x 1080 px
Image Sensor		2.1 MP Starlight Sensor
Pulsed LED Illumination		850 nm
Max. Image Rate (50 Hz / 60 Hz)		N/A
Max. IR Illumination Distance ¹ (high power 940 nm LED)		N/A
Environmental		IP67 Weather Rating


CAMERA PERFORMANCE	
Optimal Capture Distance	50 ft (15.2m)
Capture Range	30 - 75 ft (9.1 -22.9m)
Capture Speed Maximum	100 mph (161 km/h) Performance Mode 75 mph (121 km/h) Eco Mode
Field of View	24 ft (7.3 m) (multi-lane coverage)


Key features


- 


Quick Deployment
- 


Solar, AC/DC, Pole Tap or Battery Operated
- 

Tamper-Proof with Paintable Shroud
- 

Capture Speed: Up to 100 mph (161 km/h)
- 

Multi-lane Coverage
- 

Captures the Vehicle Make, Model and Color
- 

High Temperature Range: -30 to +55°C (-22 to +131°F)
- 

VehicleManager Enterprise Integration with LPR Analytics


Learn more



Audio, power & storage

Audio Compression Method	N/A
Audio Input/Output	N/A
External I/O Terminals	N/A
External Power Source	12vdc, Solar or Internal Batteries
PoE Power Source	N/A
Onboard Storage	microSD

Purchase: First two years of licensing included. Subscription - Five-year Commitment (includes annual Camera License Key (CLK) and hardware warranty)



Video Management Software

Whether you're monitoring video from fixed cameras or your suite of body-worn cameras, our video management solutions provide the control and AI-enabled tools to help ensure critical events do not go unnoticed.



Avigilon Unity Video software

A cutting-edge video management system that merges on-premise VMS with AI-enabled and cloud-managed capabilities. Never before seen in Avigilon's VMS, Unity Video offers a powerful edge-based analytics platform, to detect potentially critical events such as unusual crowds, expanded vehicle subclasses and also flag auditory disturbances. Experience effortless management of multiple sites and users, a single login credential for all applications and a single installer for all software updates.



Specifications

MODEL NAME	CORE	STANDARD	ENTERPRISE
Cameras/Server	24	75	>300 ¹
Servers/Site	1	1	>100 ¹
Client Connections per Server	2	10	Unlimited
Rule Triggers	0	51	Unlimited
Self-Learning Video Analytics Event Configuration	No		Yes
Unity Access Identity Verification	No		Yes
Unity Access Identity Search	No		Yes
Unity Access Remote Door Access Grants	No		Yes
Focus of Attention Interface	No		Yes
AI Appliance Support	No		Yes
Avigilon Pro Camera Support	No		Yes
Alarm Search	No		Yes
Alarm Notifications and Escalations	No		Yes
Avigilon Appearance Search Technology	No		Yes
Facial Recognition Support	No		Yes
No Face Mask Detection	No		Yes
Visible Firearm Detection support ²	No		Yes
License Plate Event Search and Point-of-Sale (POS)		Yes	
Multi-Camera Privacy-Blurred Export from Avigilon Appearance Search Results	No		Yes
Failover Connections and Redundant Recording	No		Yes
Active Directory Integration	No		Yes
AI NVR Support		Yes	

Learn more



¹ Avigilon has tested up to the number indicated, however no limits are imposed by licensing. Actual limits will depend on the hardware environment. ONVIF is a trademark of ONVIF, Inc.

² Requires subscription license. Deployable with ONVIF-conformant camera using AI NVR appliance.



Avigilon Unity Video software

Standard features

- Automatic device discovery
- Support for third-party ONVIF compliant cameras and encoders including dual streaming
- Support for H.265, H2.654, MPEG4, MJPEG and JPEG2000 codecs
- HDSM™ and HDSM SmartCodec™ technology support
- Avigilon Unity Video mobile app for iOS and Android
- Light and dark user interface themes
- Unusual Motion and Activity Detection timeline filtering with Skip Play
- Intelligent Motion, thumbnail and event search
- Two-factor authentication and emergency privilege override
- Two-person authenticated recorded video viewing
- Unity web client
- FIPS 140-2 encryption
- Occupancy Counting analytics*
- Support for edge-based video analytics to go beyond video and object analysis by incorporating audio capabilities such as gunshot detection, crowd detection and more vehicle subclasses in Unity Video
- Multi-camera export
- System & motion event email notifications

Learn more




* Cloud connected sites only



Avigilon Unity Cloud Services

Avigilon Unity Cloud Services allows you to seamlessly integrate your on-premise video security with cloud-managed functionality for a robust organization-wide security management platform. Enable a modern cloud-connected user experience to view live and recorded video to monitor sites and manage system health.




Specifications

Centralized Access	Anywhere Access	Organizations with distributed locations can easily access their Unity Video sites securely from anywhere on a browser or mobile device.
	Easy Remote Access	Remotely monitor multiple locations and cameras to quickly detect, verify and act on events.
	Cloud Connectivity to Unity Video Sites	Connect Unity Video sites to the cloud to converge media access, system management, and integrations.
	Tools for everyday operation	Access live and recorded video, create and view bookmarks, manage PTZ controls, and export videos to a local drive.
	Enhanced Situational Awareness	Provides timely and proactive responses to analytic alarms, sent from Unity Video software as push notifications directly to the Unity Video Mobile 3 app.
Security	Firewall Traversal	Firewall traversal enables secure remote access with minimal or no firewall reconfiguration.
	Federated Authentication	Centralize administration of user identities and use corporate credentials to access suite of Avigilon Unity Video applications.
	Seamless User Provisioning	Provisioning users is simple, as existing Unity Video group privileges are inherited for web client or mobile app viewing.
System Health Monitoring	Real-time Awareness	Confirm the operational status of your deployment to prioritize site maintenance activities and optimize uptime across all system components.
	Health Dashboard	Review a single health dashboard that rolls up the active status of all recorders and connected cameras.
	Remote Configuration Access	Access configuration details of recorders and cameras across all cloud-connected Unity Video sites.
	Remote Site Upgrades	Push software upgrades remotely to one or more Unity Video sites simultaneously, ensuring all of your sites are always on the latest versions of Unity Video.
Technical Specifications	Compatible Unity Video Platform	Unity Video 7.10 or later is required to connect Avigilon Unity Video sites to Unity Cloud Services.
	Compatible Unity Video Mobile Platform	Avigilon Unity Video mobile app is required to support remote access via a mobile device and to receive analytic alarms from Unity Video.

Key features

The Unity Cloud Services platform enables a modern cloud-connected user experience, accessible without installation from a web browser. It lays the foundation for Unity Video customers to connect to the cloud and take advantage of capabilities and features that provide centralized access.

Our platform provides for the delivery of value-add services, helping to improve your up-time, and enhance productivity, while also strengthening your security. The Unity Cloud Services platform simplifies the management of physical security systems for customers.

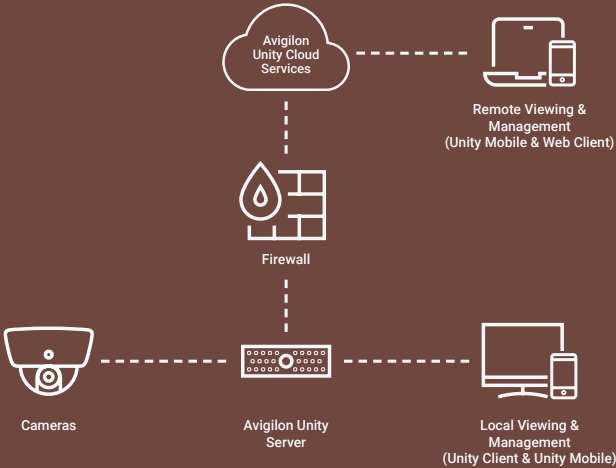

[Learn more](#)






Avigilon Decision Management System (DMS)

Enable a 100% cloud-based decision management module within Avigilon Unity Cloud Services. Streamline investigations with an intuitive interface. Easily unify video, access control and intrusion management into a single screen.

Protect your people and property with the DMS module's multi-faceted security approach, leveraging its deep integration with Motorola Solutions' cloud-based video and access control platforms. Manage video analytics alerts and access control events, review threats and identify unauthorized individuals and deny their access to sensitive areas through the DMS' integration with Avigilon Unity, Alta and Orchestrate.

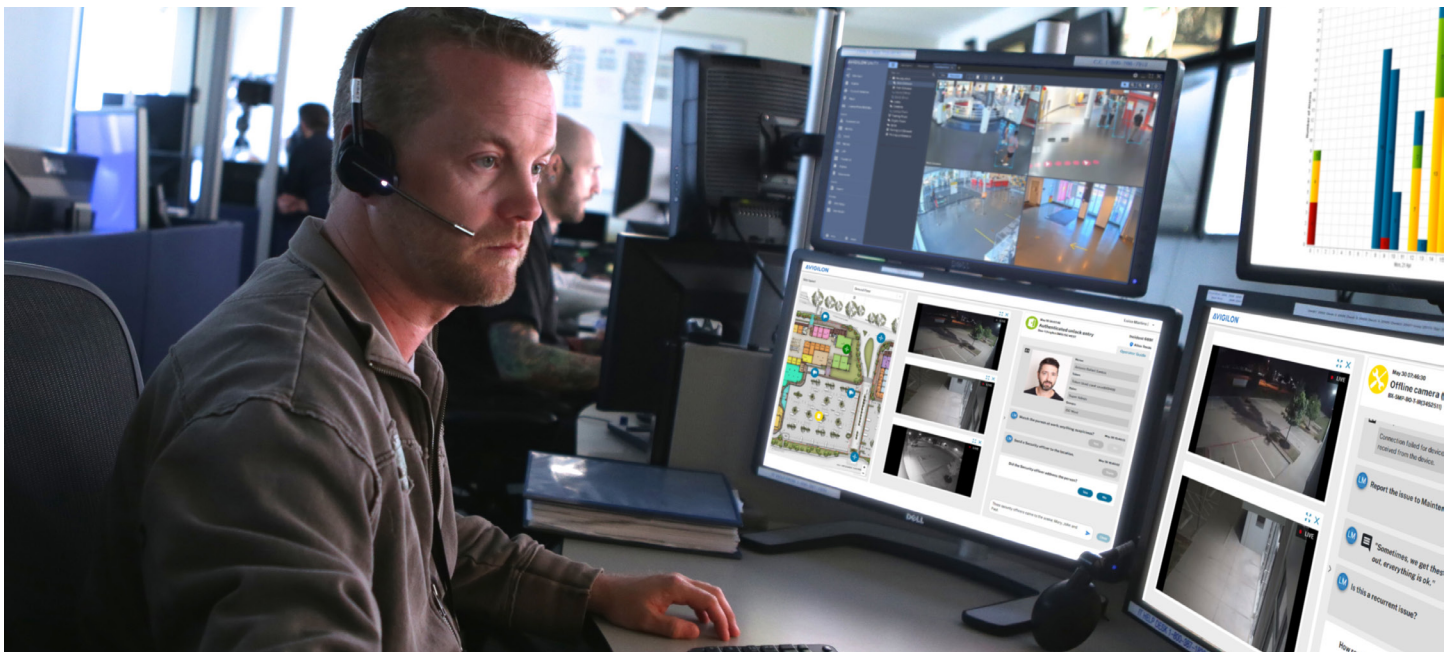

Key features



Single-Screen Interface




Simplify Decision-Making



Collaborative Incident Reporting

[Learn more](#)

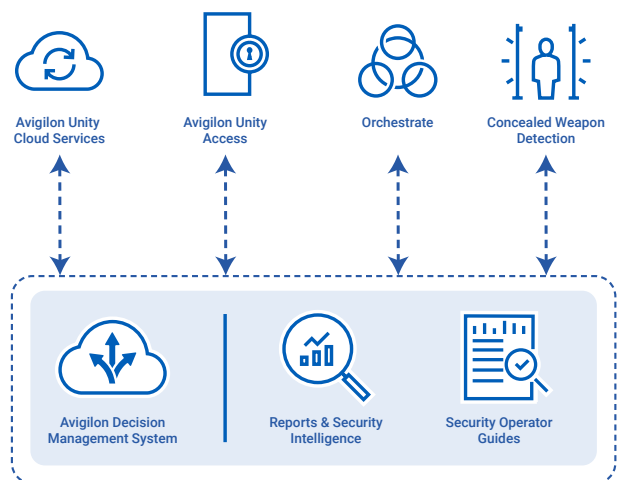

Smart Assurance Plan

The Avigilon Smart Assurance Plan offers optimal protection for your Avigilon Unity Video management software in the form of annual and multi-year upgrade plans, ensuring you always have timely access to the newest capabilities and services over the life of your plan.



Plan details

1-Year	3-Years	5-Years
<p>All plans include:</p> <p>Eligibility to all Avigilon Unity Video software versions released during the life of your plan, which never expires</p> <p>Advanced System Health</p> <p>Cost certainty on upgrades for the life of your plan</p> <p>Easy renewal at the end of your plan's term</p>		

Key features

- Protect System Investment
- Timely Access to New Features

- Pain-free Upgrades
- Cost Certainty

Learn more



Avigilon Unity Video 7.14.0 or newer is required to use Smart Update parts.



VideoManager Software

Supports VT100 & VB400 body-worn cameras

Browser-based system for management of users and devices as well as the managing, storing and sharing of digital evidence.



Specifications

Workflow Control	Granular Permissions	Users can only access the parts of the VideoManager interface which are relevant to their workflow.
	Granular Sharing	Incidents and videos can be automatically or manually shared between users and groups on VideoManager. Instances can be shared with workers who are not on VideoManager, using time-sensitive links or exports.
	Permissions Overview	Administrators can see permissions associated with a user, and how they got those permissions.
	Privilege Escalation	Authorized users can temporarily elevate their privileges for a limited time, in order to perform certain actions on VideoManager.
	Deletion Policies	Configure how long footage is kept on VideoManager before it is deleted.
	Automatic DockController Firmware Upgrades	Ensure your suite of DockControllers always have the latest firmware, eliminating manual upgrades. Configure a specific timeframe for DockController firmware upgrades, to minimize workflow disruption.
Security	Comprehensive Audit Trail	A comprehensive audit log of every action performed in the system is created. Users can create and download audit logs to view these actions if necessary.
	Access Control Keys	Without a device's access control key, undownloaded footage on a device is inaccessible.
	File Space Encryption	Footage, report and export filespace are automatically encrypted for extra security.
Scalability	Bulk Edit	Large numbers of events can be instantaneously deleted or added to incident collections. Large numbers of body-worn cameras can be assigned or upgraded in parallel.
	User Groups	Put multiple users in a group for sharing and management purposes. Groups can be supervised by individual users, or other groups.
	Reports Creation	Download reports detailing various aspects of VideoManager activity e.g. when devices were docked and undocked.
	Live Statistics	View real-time statistics with information about how VideoManager is being used.
Technical Specifications	Compatible Server Platforms	Windows Server 2016 Essentials, Standard and Datacenter, Windows Server 2012 R2 Essentials, Standard and Datacenter, Windows Server 2012 Essentials, Standard and Datacenter, Windows 10 Pro and Enterprise and Windows 8.1 Pro and Enterprise
	Compatible Client Browsers	Microsoft Internet Explorer 11 (Windows 7/8.1/10), Microsoft Edge 14+ (Windows 10), Firefox 47+ (Windows 10), Chrome 48+ (Windows 7/8.1/10, MAC OS X v10.10).

Connectivity features

- Integrates with Avigilon Unity Video management software (via ONStream technology)
- Can be enabled as a central VideoManager, to which other instances of VideoManager ("sites") can be connected
- Connect VideoManager to CommandCentral Vault, for footage storage and correlation with other CommandCentral Suite applications¹
- Group footage and other important media in an incident for ease of view

Evidence preparation features

- Put multiple incidents in an incident collection for sharing and management purposes
- Redact footage and images using effects like blurring, pixelation and highlighting. Audio, text and zoom redactions are also available
- Non-video media (PDFs, MP4s, JPGs), and videos which were not recorded using VT100 or VB400 can be imported to VideoManager and added to incidents

Learn more



^{*}Based on VM-EPL-VT-CONNECT-1.

¹ Requires CommandCentral Vault subscription.



Avigilon Alta Video

Open, scalable, secure and easy to use, Alta Video is an enterprise-grade, cloud-based AI video management system (VMS) equipped with integrated machine learning capabilities.

Specifications

PART NUMBER	AWA-CLD-1YR AWA-CLD-3YR	AWA-CLD-5YR AWA-CLD-10YR
Device support	Automatic device discovery Third-party IP & encoders H.264 compression MJPEG video compression JPEG2000 video compression	
Streaming	Dynamic Stream selection	
Search	Search by similarity Search by physical characteristics Search by color of clothing Search by event Search by image Search by object Search across all video Smart Presence	
Pervasive Video Analytics	Unusual event detection People counting Vehicle counting Forensic investigation Line crossing Spotlight Audio analytics	
Security and Privacy Protection	HTTPS camera connectivity SRTP support AES video encryption Digital watermarking against tampering RTSP over TLS No default passwords Mandatory access authentication	
Alerting and notifications	Real-time notifications Email event notifications Webhooks Rules tool	



Additional Alta Video licenses

Product Name	PART NUMBER
Alta Video Audio Recording License	LIC-AUD-REC
Alta 30 Day Cloud Storage License	AWA-CLD-STR-30-XY
Alta 60 Day Cloud Storage License	AWA-CLD-STR-60-XY
Alta 90 Day Cloud Storage License	AWA-CLD-STR-90-XY
Alta 120 Day Cloud Storage License	AWA-CLD-STR-120-XY
Alta 150 Day Cloud Storage License	AWA-CLD-STR-150-XY
Alta 335 Day Cloud Storage License	AWA-CLD-STR-335-XY
Alta Cloud Storage Connect	AWA-CLD-BYO-1Y AWA-CLD-BYO-3Y AWA-CLD-BYO-5Y
Alta Video Access Control Integration License	ACI-INT-1Y ACI-INT-3Y ACI-INT-5Y
Enable face search for a deployment	LIC-FAC-SEA
Alta Video LPR License	LIC-LPR-CHAN-1Y LIC-LPR-CHAN-3Y LIC-LPR-CHAN-5Y
Subscription for Point-of-Sale device connected to Aware (license is per device)	LIC-POS-REG-1Y LIC-POS-REG-3Y LIC-POS-REG-5Y LIC-POS-REG-10Y

X = 1, 3, 5, or 10 years

Key features

Open cloud platform	Access anywhere via browser or mobile app
Easy to configure and manage	Intelligent AI video and audio analytics
Smart search tools	Built-in security and privacy
Scalable architecture	Integrate sensors and third party cameras


Learn more






Unity Access Control

Avigilon Unity Access is an on-premise access control system for enterprise-class installations. Designed to be quickly deployed and easy to use, Unity Access provides operators with an intuitive turnkey solution so they can focus on protecting people, properties and assets.



Avigilon Unity Access Solutions

Unity Access simplifies enterprise-level access control management with a user-friendly, web-based access control system. It is built on an open architecture and supports open-platform hardware, which gives you the flexibility to connect with third-party integrations for flexible and tailored solutions. Streamline operations, improve security and empower your organization with Unity Access.

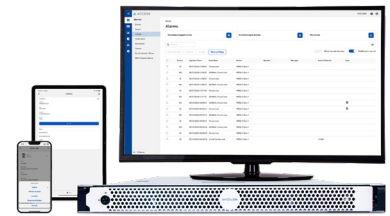


Details


Easy to use & deploy	Browser-based interface	Browser-based, requiring no software installation.
	Turnkey operation	Easy installation experience with server appliances that are ready to go the moment you plug them in.
	Scalable deployment model	Unity Access appliances allow you to start with what you need on individual appliances, then expand by adding doors and replicating additional appliances as your organization grows.
	Intuitive user interface (UI)	The UI enables optimized navigation and search capabilities, so users can quickly and easily find what they are looking for and focus on security data.
	Dynamic Scenes	Manage security objects through customized scenes or representations of your facilities, including floorplans, dashboards and quick actions. Real-time insights, dynamic icons and integration with Unity Video enhance situational awareness and streamline alert response.
	Mobile app	The Unity Access mobile app provides quick and easy access to view any door status remotely, activate a sitewide lockdown or any global action, deactivate an identity and more – anytime, anywhere.
	System configuration templates	Wide selection of easy-to-use templates for doors, wiring and input and output to enable quick Batch Add setup for faster configuration.
	Customized reporting	Pre-defined, ready-made reports that can be customized to display important access control data.
	Peer-to-peer replication	Patented technology allows for replication of identity data on multiple appliances across many sites. No additional software or hardware is required, which simplifies identity management, promotes consistency of identity data and reduces data entry efforts.
	Identity and alarm management	Streamline identity and alarm management with real-time insights, efficient identity search, import/export and badge design capabilities. An intuitive alarm management system with visual indicators, video integration and customizable workflows enables efficient incident response.
Open-field hardware support & integrations	Multi-language support	Unity Access supports Arabic, German, English (U.K. and U.S.), Spanish, French, Hebrew, Italian, Polish, Portuguese (Brazil), Russian and Chinese
	Controllers & sub-panels	Protect and future-proof your access control investment by using open non-proprietary, authentic Mercury Security hardware with support for large encoded card formats and Mercury panel certificates for added security.
	Intrusion detection	Integration to intrusion detection systems to automate the management and control within the Unity Access system.
	Wireless locks	Integration with a wide variety of leading third-party wireless lock vendors.
	Biometric readers	Integration to biometric fingerprint reader technology.
	pivCLASS	Integration with HID® pivCLASS® technology when implemented in an HSPD-12 environment requiring FIPS 201-2 evaluation program approval.
	Video security	Unification with Unity Video and integration with other third-party video management software to better inform responses with video context.
	Integration support	Experience unified, scalable security with limitless support for integration across a growing ecosystem of solutions from leading technology providers. The Avigilon Developer Community provides support for third-party integrations.

Key features

-  Browser-based and Linux-based, turnkey security solution
-  Manage devices and areas statuses in real-time from an interactive map
-  Leverage the open-platform hardware support and integrate with leading third-party wireless lock vendors
-  Unify with video management software for end-to-end security
-  Integrate via RESTful API
-  Assign and manage role-based identities and streamline alarm management
-  Perform daily operations swiftly and respond to critical events at any time with the mobile app
-  Connect your entire physical security ecosystem and automate workflows

Learn more

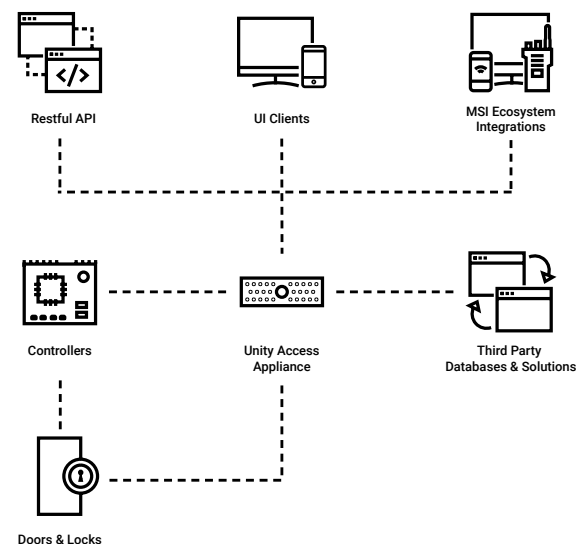



Unity Access Licensing

Invest in lifetime ownership and long-term value with Unity Access' flexible service plan, offering scalable solutions for your changing access control needs. Get regular updates, ongoing support, and the latest features and updates to help keep your people, properties and places safer. Find the pricing plan that best fits your organizational needs.

LIFETIME LICENSES Get lifetime ownership for you system, features and doors			SUBSCRIPTION Yearly - 1/3/5
Appliance ¹	Software	Doors	Service plan
Choose an appliance that works best for your system's size requirements.	Get the base license and choose from a selection of optional add-ons and other licenses.	Select the pack of doors that best suits your organization's needs. Your first 20 doors are included with the base license.	Unlock seamless access to the latest features, updates and ongoing support.
Virtual	Base license ¹	1-door pack UA-SW-LIC-1DOORS	Up to 250 doors
Professional	Individual add-ons	10-doors pack UA-SW-LIC-10DOORS	Up to 1,000 doors
Enterprise	All add-ons	100-doors pack UA-SW-LIC-100DOORS	Up to 2,000 doors
Enterprise Plus		1,000-doors pack UA-SW-LIC-1000DOORS	Up to 4,000 doors

¹ Required selections

		BASE LICENSE Max. number of objects	ADD-ON ² Max. number of objects
Data & templates	Standard Collaborations	2	1,000
	Identity profiles	5	1,000
	Badging templates	2	1,000
Availability / network	Partition	5	1,000
	Replication	1	100
	Auto-failover	✓	✓
Situational awareness	Scenes	20	1,000
	Areas	10	1,000
	Virtual stations	5	1,000
	Global actions	50	1,000
Integrations	REST	✓	✓
	3rd-party video integration	-	✓
	Biometric enrolment	-	✓
	Intrusion panels	-	50
All-in add-ons			

² Actual limits will depend on the hardware environment. Please reach out to your sales representative or [contact us](#) for recommendations.

Unity Access System

Designed to help you focus on securing your people, property and assets, while giving you the flexibility to respond to alerts wherever you are.

Specifications



EDITION	PROFESSIONAL	ENTERPRISE	ENTERPRISE PLUS	VIRTUAL UA-SW-LIC-APP-VIRTUAL-VMWARE UA-SW-LIC-APP-VIRTUAL-HYPERV
Part Number	UA-APP-PRO-7	UA-APP-ENT-7	UA-APP-ENT-PLUS-7	
	Ideal for small systems	Ideal for medium systems	Ideal for large systems	Ideal for private virtual environments
Appliance Type	Small form factor, desktop	1U rack mount chassis		VMware vSphere® ESX(i) 6.5+ ¹ or Microsoft Hyper-V
Max. Number of Doors	Up to 50	Up to 400	Up to 4,000 ²	Up to 4,000+
Max. Simultaneous Operators	10	20	50	
Max. Identities	75,000	250,000	500,000	
Max. Stored Transactions	75,000,000	150,000,000		
Storage	500 GB (7.2K RPM SATA)	1 TB (7.2K RPM SATA 6 Gbps)	1.3 TB (4 x 480 GB SSD RAID5)	1 TB SSD ¹
Processor	3.7 GHz Intel Pentium® 5400 (4 MB cache, 2C/4T, 65 W)	Intel Xeon E-2124 3.3GHz, 8M cache, 4C/4T, turbo (71W)	3.8 GHz Intel Xeon E3-1270 v6 (8 MB cache, 4C/8T, Turbo, 72 W)	3.8 GHz Intel Xeon E3-1270 v6 (8 MB cache, 4C/8T)
Memory	4 GB (1 x 4 GB) (2.6 GHz DDR4 Non-ECC)	8GB 2666MT/s DDR4 ECC UDIMM	32 GB (2 x 16 GB) (2400 MT/s DDR4 UDIMMs)	32 GB ¹
Network Interface	1 Gigabit Ethernet Intel	1 Gigabit Ethernet Broadcom 5720		1 Gigabit Ethernet ¹
RAID & Hot-Swap Components		No	Yes	Yes ¹

Learn more





¹ System recommendations.

² Actual limits will depend on the hardware environment. Please reach out to your Sales Representative for recommendations.

Controllers & sub-panels

Avigilon is a Platinum Elite Mercury Security Partner. With Mercury hardware options for small to enterprise level systems, deploying and managing your Unity Access system has never been more intuitive and flexible as it is today.




Details

MODEL NAME	CONTROLLERS	INTERFACE MODULES	I/O MODULES
Part Number	AC-MER-CONT-MP1501 AC-MER-CONT-MP1502 AC-MER-CONT-MP2500 AC-MER-CONT-MP4502 Support for legacy EP and LP Mercury controllers	AC-MER-CON-MR52 AC-MER-CON-MR50 AC-MER-RIM-MR62E	AC-MER-CON-MR16IN AC-MER-CON-MR16OUT
Features	Manage anywhere from 17 to 64 readers Enhanced data security with embedded crypto memory chip Latest cybersecurity Performance and memory improvements Next generation firmware with Mercury OS 2.x Backwards compatibility with Unity Access via legacy mode	Low-cost and high-performance for all I/O needs Manage multiple controlled openings with auxiliary point control and monitoring Provide access control and security monitoring using any of the Mercury controllers connected to the Unity Access system Enhanced data security with embedded crypto memory chip	Monitor high concentrations of inputs and outputs with the Unity Access system Compact footprint and RS-485 connectivity Capable of supporting 16 general-purpose dry-contact inputs or outputs Supports being clustered or distributed to suit the installation environment

Learn more





Readers & Credentials

The Unity Access system offers trusted and secure door readers and multipurpose credential options to keep security at the forefront of your facility.



Details


MODEL NAME	VIRDI BIOMETRIC ACCESS READERS	AVIGILON SE CREDENTIALS	AVIGILON SIGNO CARD READERS	AVIGILON SEOS CREDENTIALS
Part Number	AC-VT-READ-BIO-RFID-AC5000SC-BLK-NA AC-VT-READ-BIO-RFID-AC2000SC-NA AC-VT-READ-BIO-RFID-AC2000IC-NA AC-VT-READ-BIO-RFID-AC5000IC-NA	AC-HID-CARD-ICLASS-SE-3000-AVG AC-HID-CARD-ICLASS-SE-3000-AVG-NL	AC-HID-READER-SIGNO-40TKS-0X-00001H-AVG ¹ AC-HID-READER-SIGNO-20TKS-01-00001H-AVG AC-HID-READER-SIGNO-20TKS-01-000000-AVG AC-HID-READER-SIGNO-40TKS-01-000000-AVG	AC-HID-CARD-SEOS-5006PGCMN-AVG AC-HID-CARD-SEOS-5006PGGMN-AVG AC-HID-FOB-SEOS-5266PNNA-AVG
Features	<p>Detect fingerprints quickly and accurately and discern fake biometric attempts for high security environments</p> <p>Easily set up and manage biometric identities directly from the Unity Access system</p> <p>Get real-time visibility into current risk position and reduce unauthorized access</p>	<p>Purposefully designed for the Unity Access system</p> <p>Advanced 56-bit format provides multiple levels of security</p>	<p>Highly versatile with support for the widest range of credential technologies, including HID Mobile Access</p> <p>Ultra secure storage of cryptographic keys on certified secure element hardware</p> <p>Includes out-of-the-box support for Open Supervised Device Protocol (OSDP) for secure bidirectional communication</p>	<p>Leverages advanced Seos credential technology by HID Global, allowing seamless migration to a higher standard of security and functionality</p> <p>Advanced 56-bit format provides multiple levels of security</p> <p>Available in logo card, non logo card or FOB</p>

Learn more



¹ We support -00/01/02/03

For a full list of part numbers, contact your [local sales representative](#).



Readers & Credentials

The Unity Access system offers trusted and secure door readers and multipurpose credential options to keep security at the forefront of your facility.



Details




MODEL NAME	FARPOINTE DATA CONEKT READERS AND CREDENTIALS	FARPOINTE DATA DELTA READERS	FARPOINTE DATA RANGER READERS	FARPOINTE DATA GUARDIAN READERS	FARPOINTE DATA GIBRALTAR READERS	FARPOINTE DATA PYRAMID READERS
Part Number	AC-FP-READ-CSR-35L-OSDP AC-FP-READ-CSR-35L-WG	AC-FP-READ-DELTA3-CSN AC-FP-READ-DELTA3-SECTOR AC-FP-READ-DELTA5-CSN AC-FP-READ-DELTA5-SECTOR AC-FP-READ-DELTA5.3-CSN AC-FP-READ-DELTA5.3-SECTOR AC-FP-READ-DELTA6.4-CSN AC-FP-READ-DELTA6.4-SECTOR	AC-FP-REC-LONG-RANGE-WRR-22 AC-FP-REC-WRR-44	AC-FP-READ-GUARDIAN-VR-P-403-HA AC-FP-READ-GUARDIAN-VR-P-405-HA AC-FP-READ-GUARDIAN-VR-P-410-HA	AC-FP-READ-GIBRALTER-BR-P-455-HA AC-FP-READ-GIBRALTER-BR-P-453-HA	AC-FP-READ-P-300-H AC-FP-READ-P-300-H-A AC-FP-READ-P-500-H AC-FP-READ-P-500-H-A AC-FP-READ-PROX-EURO-P-530-HA AC-FP-READ-PROX-KEYPAD-P-620-HA AC-FP-READ-P-640-H AC-FP-READ-P-640-H-A AC-FP-READ-P-710-H AC-FP-READ-P-710-H-A AC-FP-READ-P-900-H AC-FP-READ-P-900-H-A
Features	Enables smart-phones to be the access credential with a secure smart-phone wallet app Readers read Conekt BLE mobile credentials as well as traditional physical credentials Supports industry standard and custom formats	Enhanced smartcard encryption and optional DESFire EV1 and EV2 support Supports industry standard interfaces Based upon the world-standard MIFARE technology, ideal for ISO14443 applications Installs indoors or outdoors	Exceptionally long read range—up to 200 ft (61 m) Ideal for parking facilities, gated communities, marinas and more Supports industry standard electronic access control interfaces	Vandal-resistant with thick polycarbonate material, epoxy potted electronics and tamper proof screws Suited for schools, inner-city environments, correctional facilities, or where heavy machinery is operated	Vandal-resistant with stainless steel built and reinforced with a bullet-resistant Shot Blocker insert and tamper proof screws Suited for schools, correctional facilities, housing authorities, and where heavy equipment is operated	Outstanding read range and excellent read speed Mounts to most surfaces, including metal Installs indoors or outdoors Supports industry standard interfaces

Learn more



For full list of part numbers including credentials, contact your [local sales representative](#).



Readers & Credentials

The Unity Access system offers trusted and secure door readers and multipurpose credential cards to keep security at the forefront of your facility.



Details




MODEL NAME	SCHLAGE MOBILE ENABLED MULTI- TECHNOLOGY READERS	SCHLAGE MULTI- TECHNOLOGY READERS	SCHLAGE SMART CARD READERS	SCHLAGE PROXIMITY READERS	SCHLAGE WIRELESS READERS	SCHLAGE ENROLLMENT READERS
Part Number (readers)	AC-SCH-READER-MTB11 AC-SCH-READER-MTB15 AC-SCH-READER-MTKB15	AC-ING-READ-APTIQ-MULL-MT11 AC-ALL-READ-APTIQ-OSDP-MULL-MT11-485 AC-ING-READ-APTIQ-SNG-MT15 AC-ALL-READ-APTIQ-OSDP-SNG-MT15-485 AC-ING-READ-APTIQ-KEYPD-MTK15 AC-ALL-READ-APTIQ-OSDP-KEYPD-MTK15-485 AC-ALL-READ-APTIQ-WIEGAND-MTMSK15	AC-ING-READ-APTIQ-MINI-SM10	AC-ING-READ-XCEEDID-PROX	AC-ALL-SCH-WPR400-MT	AC-ING-READ-APTIQ-ENROLL-MT20
Features	Eases the transition from existing proximity systems to secure encrypted card technologies or mobile solutions Supports Schlage Mobile Access Credentials (BLE) and Near Field Communication (NFC) Offers support for Apple's Enhanced Contactless Polling (ECP) for Apple Wallet and Google Pay credentials	Recognizes magnetic stripe, proximity, Schlage smart card and NFC-enabled smart devices Works with industry standards and common access control system interfaces	Sleek, compact and cost-effective for high-security applications Mini-mullion design is ideal for installation in tight spaces Meets applicable ISO standards to integrate with many access control systems Mutually authenticated in communication between the card and reader for optimum security	Sleek, compact and cost-effective for applications requiring lower security Mini-mullion design is ideal for installation in tight spaces Recognizes most industry leading 125 kHz proximity credentials Easily integrates into existing legacy proximity systems and are compatible with new installations	Quickly extend a facility's access control to remote locations Battery-operated device that can be handheld or placed in a temporary location for credential verification LED indicator visually confirms credential verification or rejection Utilizes the same credential reader modules offered with an AD Series lock	Simplifies enrollment of smart and multi-technology credentials in "No-Tour" multi-family applications Program encrypted credentials, such as a keyfob, over Wi-Fi or USB connection to PC When presented at a lock by the user, the pre-programmed credentials automatically update the lock database

Learn more



For full list of part numbers including credentials, contact your [local sales representative](#).



Readers & Credentials

The Unity Access system offers trusted and secure door readers and multipurpose credential cards to keep security at the forefront of your facility.



Details



MODEL NAME	STid ARCHITECT® BLUE READERS	STid ARCHITECT® BLUE DESKTOP READER/ENROLLER	STid UHF & BLUETOOTH® MULTI-TECHNOLOGY READER	STid SWEDGE ENROLLMENT KITS	STid PROGRAMMING KITS	STid CREDENTIALS
Part Number	AC-STID-READER- ARC1S-W33-B/BT1- 70S/1A AC-STID-READER- ARC1S-R31-B/BT1- 3i/1A AC-STID-READER- ARCS-W33-A/BT1- 70S/1A AC-STID-READER- ARCS-W33-B/BT1- 70S/1A AC-STID-READER- ARCS-W33-C/BT1- 70S/1A AC-STID-READER- ARCS-W33-AQ/BT1- 70S/1A AC-STID-READER- ARCS-W33-BQ/BT1- 70S/1A	North America: AC-STID-ENROLL- READER-USB-ARCS- R35-H/BT1-5AQ/1A Europe: AC-STID-ENROLL- READER-USB-ARCS- R35-H/BT1-5AB/1A	US UPPER-BAND: AC- STID-READER-SNA- W53-A/BT4-70S/1 EUROPE LOW-BAND: AC-STID-READER- SNA-W43-A/BT4- 70S/1	North America: AC-STID-ENROLL- READER-UHF- SWEDGE-W55 Europe: AC-STID-ENROLL- READER-UHF- SWEDGE-W45	ARCHITECT® BLUE PROGRAMMER: AC-STID-ARCHITECT- PROGRAMMING-KIT- SECARD-BT SPECTRO NANO PROGRAMMER: AC-STID-SPECTRE- PROGRAMMING-KIT- ULTRYSV2	AC-STID-CARD- NONPROGRAMED- CCTW670 AC-STID-KEYFOB- NONPROGRAMED- PCGW671 AC-STID-TAG-UHF- WINDSHIELD-ETA- W75B-574BE10
Features	Wide range of sizes and features: mullion or standard readers, capacitive keypad or touchscreen readers, and more Various mobile identification modes available Secure readers with RFID and Bluetooth® technologies	Designed for all short-range contactless encoding, enrollment and identification applications	Compact UHF and Bluetooth® reader Secures and eliminates vehicle access lines	Easy enrollment of all UHF identifiers by keyboard emulation Includes desktop reader and SWEDGE software	Software kits to configure non programmed readers	Designed for all access control and high security identification applications Several chip technologies available to meet all access control needs

Learn more



For full list of part numbers including credentials and MSI-programmed versions, contact your [local sales representative](#).

Power Supplies

Avigilon’s high-efficiency, cost-effective power supplies from LifeSafety Power and Elmdene provide all the power needed for up to 16-door applications.



Details

Model Name	LIFESAFETY POWER	ELMDENE ¹
Part Number	AC-LSP-XDR-MER AC-LSP-XDR-MER-LCK All Mercury and SALTO LSP enclosures available (including ProWire and rack mounted) Contact your local Sales Representative for more information	AC-ELM-1DR AC-ELM-2DR AC-ELM-4DR AC-ELM-4/12DR-EXP AC-ELM-12DR AC-ELM-4/12DR-EXP-LCK AC-ELM-ACCESS-EXP-PLATE
Max. Number of Doors Supported	2DR: 2 4DR: 4 8DR: 8 16DR: 16 24DR: 24	1DR: 1 2DR: 2 4DR: 4 12DR: 12
Features	Designed to house Mercury Security controllers Separate 24 VDC circuit provides lock power within the same enclosure, saving the cost of added hardware and installation time	Designed to house Mercury Security controllers 13.8 VDC 4A output supplies continuous full rated current to load Additional 0.5A to charge standby battery Modular construction for ease of maintenance and installation

Learn more



¹ Listed products from Elmdene are only available in the European Union and the United Kingdom.

Wireless Lock Integrations

The Unity Access system seamlessly integrates with third-party wireless locks for you to combine all of the components of an access controlled door into a simplified all-in-one system that saves time and costs.



Details




MODEL NAME	SCHLAGE AD SERIES LOCKS	SCHLAGE PIM400 & PIM300	SCHLAGE LE/B & NDE/B LOCKS	VON DUPRIN RU/RM CRASHBARS
Part Number	AC-SCH-AD400-CUSTOM AC-SCH-AD300-CUSTOM (Wired) AC-SCH-993-CUSTOM (Crashbar)	AC-ALL-SCH-PIM400-485-RSI AC-ALL-SCH-PIM400-1501-LC AC-ALL-SCH-PIM400-TD2 AC-ALL-SCH-PIB300-2D	AC-SCH-NDE-CUSTOM AC-SCH-LE-CUSTOM	AC-SCH-RU-VOND-3-47258681 AC-SCH-RU-VOND-4-47258682 AC-SCH-RM-VOND-3-47258683 AC-SCH-RM-VOND-4-47258684
Features	<p>Upgrade to new technologies without taking locks off the door</p> <p>Cylindrical, mortise, mortise deadbolt and exit trim chassis options</p> <p>Built-in credential reader and access control sensors for simplified installation</p> <p>FIPS 201-2 compliant</p>	<p>Standard IP addressable intelligent controller for up to 16 AD Series wireless devices</p> <p>Manage up to 240,000 cardholders and 50,000 transactions in memory</p> <p>PoE compliant to IEEE 802.3af</p>	<p>Affordably extend electronic access control deeper into your facility</p> <p>Packaged with credential reader and access control sensors for simplified installation</p> <p>LE mortise locks can be ordered with LED indicator, interior push button (IPB) or deadbolt for tailored applications</p> <p>NDEB cylindrical locks can be ordered with IPB to extend the lock to include storeroom, office, privacy and apartment applications</p>	<p>Provide greater perimeter security for K-12 schools</p> <p>Enable remote undocking and door status monitoring</p> <p>Modular kit retrofits existing 98/99 and 33A/35A series devices</p>
Communications supported	<p>AD400: Mercury to PIM then 900 MHZ to lock</p> <p>AD300: Mercury via RS-485 to lock</p>	<p>AD400: uses PIM400-458 and PIM400-1501-LC or PIM400-TD2 via wiegand</p> <p>AD300 used RS-485 or PIB300-2D</p>	<p>NDEB and LEB: Wifi direct to Unity Access</p> <p>Mercury to Gateway then wireless Bluetooth NDEB or LEB</p>	<p>RU/RM: via Gateway direct via POE to Unity Access</p>

Learn more



Not all wireless locks products are available in all regions, please contact your [local sales representative](#) to confirm availability.



Wireless Lock Integrations

The Unity Access system seamlessly integrates with third-party wireless locks for you to combine all of the components of an access controlled door into a simplified all-in-one system that saves time and costs.

SALTO

Details




MODEL NAME	SALTO SPACE VIRTUAL NETWORK (SVN) DATA-ON-CARD SYSTEM	SALTO CONTROLLERS	XS4 ORIGINAL	XS4 MINI ANSI	XS4 LOCKER LOCK	NEOXX PADLOCK G4 AND G3
Part Number	Contact your local sales representative					
Features	<p>Streamline access management for high door density facilities with access data on the card</p> <p>Update cards quickly with RFID technology</p> <p>Locks can securely read, receive and write information to ensure access rights are updated</p> <p>Issue SALTO JustIn Mobile credentials from Unity Access to manage access rights over-the-air</p> <p>Real time communication via mobile credential where mobile device is controller</p>	<p>Online networked door controller</p> <p>Connection for two readers on board</p> <p>Two reader downstream panels via RS-485 connection for up to 10 doors off a controller</p> <p>4 relay outputs</p> <p>6 inputs</p>	<p>Unique, simple to install and retrofit, and featuring a sleek design</p> <p>BLUEnet Wireless cutting-edge real-time technology and newly-developed and powerful SVN-Flex capability engine</p> <p>Compatible with Salto Space data-on-card, Salto KS Keys as a Service cloud-based access solution, and Salto's JustIn Mobile technology for digital keys</p> <p>Includes RFID NXP MIFARE®, Bluetooth LE, and NFC technology functionality</p>	<p>Designed to meet ANSI A156.2 Grade 1 or 2 cylindrical latch requirements</p> <p>High security via high resistance, hardened anti-drill protection</p> <p>Includes RFID, Bluetooth LE, and NFC technology functionality</p>	<p>XS4 Locker lock is perfect for controller access to lockers, cabinets, cupboards, boxes and show cases</p> <p>Offline or online capability</p> <p>Outer thumbturn with red/green indicator for availability of the locker</p> <p>Comes with BioCote antimicrobial technology</p> <p>Compatibility with cards, fobs or mobile credentials for real time audi</p>	<p>Neoxx padlocks are the ultimate smart locking solution</p> <p>Built to withstand all access needs, the Salto Neoxx Padlock series offers a unique solution ideal for utility and critical infrastructure security – electric power stations, telecom network services, industry applications</p> <p>Property services that need an additional level of security to control specific doors like gates or storages, without losing convenience or control.</p> <p>As portable as conventional padlocks, the Neoxx Padlock's security is enhanced by removing any lock's most vulnerable part – the mechanical key</p>

Learn more




For a full list of part numbers, contact your [local sales representative](#).



Wireless Lock Integrations

The Unity Access system seamlessly integrates with third-party wireless locks for you to combine all of the components of an access controlled door into a simplified all-in-one system that saves time and costs.

ASSA ABLOY




Details

MODEL NAME	ASSA ABLOY APERIO LOCKS	ASSA ABLOY WI-FI LOCKS	ASSA ABLOY POWER OVER ETHERNET (POE) LOCKS
Part Number			
Features	<p>Deploy in a wide range of applications including offices, server cabinets, storage lockers, drawers, glass doors and more</p> <p>Flawless integration with Mercury controllers to provide real-time access and audit</p> <p>Support the use of HID Mobile credentials to access doors using a mobile device</p>	<p>Suited for hard-to-wire locations</p> <p>Reduce installation time and costs by utilizing existing Wi-Fi</p> <p>Easy transition to higher security credentials such as HID Mobile and government-issued PIV with HID Global multiCLASS SE technology</p>	<p>Enable easy and cost-effective installations into existing infrastructure</p> <p>Set up real-time communication by utilizing IEEE 802.3af PoE-enabled network infrastructure</p> <p>Support multiple credential types such as HID Mobile, for a secure solution with multiCLASS SE technology</p> <p>Privacy button allow shelter in place/ local lockdown</p>
Communication	<p>Aperio locks run on a wireless 2.4 GHz frequency back to hubs</p> <p>Connection via Mercury to AH30 Gen 5 RS-485 hub, or to AH40 Gen 5 POE Hub or via AH20 wiegand 1 to 1 hub</p>	<p>WiFi locks communicate via Wi-Fi on 2.5 Ghz frequency</p> <p>WiFi locks connect to Assa DSR [Door Service Router] which communicates via network to Unity Access</p>	<p>POE locks communicate via POE network connection</p> <p>POE locks connect to Assa DSR [Door Service Router] which communicates via network to Unity Access</p>

Learn more



Available in the United States and Canada only.



Federal Government Solutions

Currently supported in Unity Access (formerly ACM) 6. Unity Access 7 certification coming soon.

The Unity Access system is FIPS 201-2 compliant and is a certified solution on the GSA Approved Product List, meeting the Personal Identity Verification requirements mandated for U.S. federal employees and contractors. Customers can conveniently and reliably purchase all components of this fully compliant, GSA-approved FICAM solution directly from Avigilon.

Details



MODEL NAME	UNITY ACCESS SOFTWARE	HID PIVCLASS SOFTWARE	CONTROLLERS & SUB-PANELS	HID PIVCLASS AUTHENTICATION MODULE (PAM)	HID PIVCLASS READERS
APL Approved Products	APL #10122 Avigilon PACS software Unity Access (ACM) 6.50.6 or below	Validation System APL# 10123 pivCLASS Registration Engine for Unity Access pivCLASS Certificate Manager, Release 5.12.0 pivCLASS Reader Services, Release 5.12.0 pivCLASS IDPublisher, Release 5.12.0	APL #10122 HID LP4502 Intelligent Two Door System Controller with pivCLASS Embedded Authentication (Software 1.29.1, Firmware 5.11.38) HID LP2500 Intelligent Controller (Firmware 1.29.1) HID LP1502 Intelligent Controller (Firmware 1.29.1) HID MR52-S3 Two Reader Interface Module (Firmware 3.21.0) HID MR62e Reader Interface Module (Firmware 3.21.x)	Validation System APL# 10123 pivCLASS Authentication Module	Embedded Configuration pivCLASS RP40 Contactless Reader VAS0300 Rev. B.1 (APL# 10003) pivCLASS RK40 Contactless Reader VAS0300 Rev. B.1 (APL# 10004) pivCLASS RPK40 Contactless Reader VAS0300 Rev. B.1 (APL# 10005) pivCLASS R40 Contactless Reader VAS0300 Rev. B.1 (APL# 10006) pivCLASS RKCL40 Contactless Reader VAS0300 Rev. B.1 (APL# 10007) pivCLASS RPKCL40 Contactless Reader with PIN VAS0300 Rev. B.1 (APL# 10008) Authentication Module Configuration pivCLASS RP40 Contactless Reader (APL#10003) pivCLASS RK40 Contactless Reader + PIN (APL# 10004) pivCLASS RPK40 Contactless Reader + PIN (APL# 10005) pivCLASS R40 Contactless Reader (APL# 10006) pivCLASS RKCL40 Contactless Reader with PIN (APL# 10007) pivCLASS RPKCL40 Contactless Reader with PIN (APL# 10008) pivCLASS RPKCLB40 Contactless Reader with PIN & BIO (APL# 10026) pivCLASS RKCLB40 Contactless Reader with PIN & BIO (APL# 10052) pivCLASS R10 Contactless Reader (APL# 10085)

Learn more



Biometric Solutions

The integration of Unity Access with VIRDI's biometric fingerprint reader technology provides further safeguards to high security environments with an extra form of identification.

Details



MODEL NAME	VIRDI ENROLLMENT USB FINGERPRINT READER	VIRDI IP65 FINGERPRINT SMARTCARD READER WITH KEYPAD	VIRDI IP65 FINGERPRINT SMARTCARD READER
Part Number	AC-VT-READ-BIO-USB-FOH02-SC	AC-VT-READ-BIO-RFID-AC5000SC-BLK-NA	AC-VT-READ-BIO-RFID-AC2000SC-NA
Features	Seamless integration between VIRDI's Biometrics Enrollment Manager interface and Unity Access to add and remove biometric identities	Seamless integration between VIRDI's Biometrics Enrollment Manager interface and Unity Access to add and remove biometric identities	Seamless integration between VIRDI's Biometrics Enrollment Manager interface and Unity Access to add and remove biometric identities
	Easily set up and manage biometric identities directly from Unity Access	IP65 rating for dust and water resistance	Secure and convenient access with Bluetooth and VIRDI's UNIS B plus mobile application
	Authenticate individual using one-to-one biometric verification	OSDP compatible with Unity Access controllers integration Simplify operation with graphic UI and customizable 2.8" Color TFT LCD background	IP65 rating for dust and water resistance OSSP compatible with Unity Access controllers integration

Learn more



Visitor Management

Unity Access integrates with HID Global's EasyLobby Secure Visitor Management software, which allows organizations to automate the entire process of registering a visitor, printing a badge and capturing detailed information in seconds by simply scanning an ID.

Details



MODEL NAME	UNITY ACCESS INTEGRATION WITH HID GLOBAL EASYLOBBY SOFTWARE	HID GLOBAL SNAPSHOT LICENSE CARD SCANNER	ASSURETEC ID-150 CARD SCANNER	DYMO 550
Part Number	AC-HID-EL-96000-SVM10	AC-HID-EL-SS-R2	AC-HID-EL-AST-ID150	AC-HID-EL-DYMO-550
Features	<p>EasyLobby visitor records are automatically updated to Unity Access with identity information</p> <p>Streamlines enrollment with pre-registration or self-registration options</p> <p>Improves security by identifying who is in a facility quickly and accurately, especially in emergency situations</p> <p>Conduct analysis and reporting on visitor data, quickly and easily</p>	<p>Leverages Optical Character Recognition (OCR) to read driver's licenses and ID cards quickly and accurately</p> <p>Easy-to-use with no moving parts and compact design takes up minimal counter space</p>	<p>Reads and verifies identity documents such as driver's licenses and IDs quickly and accurately, including the photo</p>	<p>Prints temporary badges for increased security and visibility of visitors</p> <p>Eliminates the cost of ink or toner with direct thermal printing technology</p>

Learn more







Intrusion Panels Integration

Centrally monitor and control intrusion objects and access events from the Unity Access system for visual verification of alerts and faster responses. Operators can manually arm or disarm areas and leverage Unity Access capabilities to automate the intrusion system with access control events.

Details



Model Name	BOSCH INTRUSION INTEGRATION	DMP INTRUSION INTEGRATION
Part Number	Part of the All-In Add-on or Integrations Add-on UA-SW-LIC-INTEGRATIONS-ADDON UA-SW-LIC-ALL-IN-ADDON	Part of the All-In Add-on or Integrations Add-on UA-SW-LIC-INTEGRATIONS-ADDON UA-SW-LIC-ALL-IN-ADDON
Supported Panels	Mid-range: B3512, B4512, B5512, B6512 Commercial: B8512G, B9512G, D9412GV4 V2, D7412GV4	XR150, XR550
Features	Workflow automation Increased situational awareness and faster response Quicker verification of intrusion events via live video triggers Increased Security And Convenience With Intrusion Area Control Available from anywhere and at any time from mobile devices No additional access hardware or wiring required – connects to IP networks	


Learn more





Alta Access Control

The Motorola Solutions Avigilon Alta cloud-native access control system is fast, flexible and future-proof. Enhance security and improve awareness seamlessly with intuitive software, modern readers, and user-friendly mobile credentials. Choose from a range of options designed to secure anything from a single door up to a global enterprise.



Avigilon Alta Access

The cloud-native Avigilon Alta Access from Motorola Solutions is an intuitive access control system, designed to make managing security for any number of users, sites and devices easier. Available in Basic, Premium, and Enterprise levels, and equipped with robust security features on a fully remote, cloud-based management platform.

Specifications

EDITION	BASIC	PREMIUM	ENTERPRISE
Part Number	SW-BSC-P1 SW-BSC-P5 SW-BSC-P10 SW-BSC-P25 SW-BSC-P100 SW-BSC-P1000	SW-PRM-P1 SW-PRM-P5 SW-PRM-P10 SW-PRM-P25 SW-PRM-P100 SW-PRM-P1000	SW-ETP-P1 SW-ETP-P5 SW-ETP-P10 SW-ETP-P25 SW-ETP-P100 SW-ETP-P1000
API, Webhooks, Mobile SDK	✓	✓	✓
Lifetime warranty	✓	✓	✓
Alerts	✓	✓	✓
Reports	✓	✓	✓
Lockdown ¹	Standard	Flexible	Flexible
Occupancy management		✓	✓
Enhanced role management		✓	✓
Rules Engine	Basic	Advanced	Advanced
Custom user fields		✓	✓
VMS Integrations with Milestone and Cisco meraki	A la carte	✓	✓
Custom badge printing	A la carte	✓	✓
Muster Reports		✓	✓
Alarm Management		✓	✓
Custom dashboards		✓	✓
Static Cloud IP			✓
Support SLA			✓
Live Support	Mon - Fri	7 days/week	24/7 priority
API/Webhook consultation	Integration only	1 hour/month	Unlimited

¹ Flexible Lockdown is included at no additional charge for all 501(c)3 organizations.

Key features



Simplified access with touchless mobile credentials



Secure-by-default with end-to-end encryption and automatic updates



Advanced reports and custom dashboards



Occupancy management to automate and enforce capacity limits in real time



Scalable support for unlimited users, sites, roles and groups




Custom alerts and triggers to stay on top of critical access events



Integrations and App Marketplace

Learn more





Avigilon Smart Reader

Sleek proximity reader that features best-in-class door access. Compatible with mobile devices, cards, fobs, NFC, WiFi and Bluetooth®.




Specifications

MODEL NAME	AVIGILON STANDARD SMART READER V2		AVIGILON MULLION SMART READER V2
Part Number	OP-R2X-STND		OP-R2X-MULL
Card compatibility	Openpath DESFire EV3		
	MIFARE Classic/DESFire/Ultralight (ISO14443A) CSN		
	Openpath Proximity		
	HID proximity		
	LenelProx		
Security	Encrypted communications between mobile app and controller		
	Fully encrypted communication between Openpath key cards and reader		
	Eliminate threat of copying or cloning Openpath key cards		
	Includes tamper resistant secure storage		
System Compatibility	Reader works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app		
	Reader works with legacy access control systems via Mobile Gateway option		
	Support for Apple Enhanced Contactless Protocol (ECP)		
Cloud Management	Yes		
Form	Standard		Mullion
Frequency	125 kHz, 13.56 MHz		
Openpath Bluetooth	Yes		
Auto proximity unlock	Yes		
Standards	ISO 14443A, Prox		
Certification	CE, FCC, UL 294, UKCA		
Environmental	IP65		
Dimensions	With back cover, no gang box: 7.4 x 12.0 x 2.3 cm		4.3 x 11.9 x 2.2 cm
	With back cover, on gang box: 7.4 x 12.0 x 1.1 cm		

Key features


-  Touchless access, with Triple Unlock technology
-  Modern design seamlessly blends into or upgrades the aesthetics of any entry
-  Indoor/outdoor design
-  Supports auxiliary Wiegand readers connected through the Avigilon reader
-  Functions seamlessly with the mobile app, available on iOS and Android
-  Works with Smart Watches in addition to mobile app
-  Supports remote unlocking with user-level privileges
-  Lifetime warranty

Learn more



Avigilon Standard Smart Reader Accessories

PRODUCT NAME	PART NUMBER
Standard Smart Reader Cover in white	OP-CVR-W



Avigilon Smart Keypad Reader

Avigilon Smart Keypad Readers combine all the capabilities of the Avigilon Smart Readers while revolutionizing PIN code access and supporting multi-factor authentication. Designed for ease of use for both credentialed users and visitors, readers have a durable, capacitive touch keypad that prevents wear-and-tear and spoofing.



Specifications

MODEL NAME	AVIGILON STANDARD SMART KEYPAD READER	AVIGILON MULLION SMART KEYPAD READER
Part Number	OP-RKP-STND	OP-RKP-MULL
Card compatibility	Openpath DESFire EV3	
	MIFARE Classic/DESFire/Ultralight (ISO14443A) CSN	
	Openpath Proximity	
	HID proximity	
	LenelProx	
Security	Encrypted communications between mobile app and controller	
	Fully encrypted communication between Openpath key cards and reader	
	Eliminate threat of copying or cloning Openpath key cards	
	Includes tamper resistant secure storage	
	Fully encrypted PIN transmission between reader and controller	
System Compatibility	Reader works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app	
	Reader works with legacy access control systems via Mobile Gateway option	
	Support for Apple Enhanced Contactless Protocol (ECP)	
Cloud Management	Yes	
Form	Standard	Mullion
Frequency	Bluetooth LE (2402 - 2480MHZ): 2 dBm	
Openpath Bluetooth	Yes	
NFC	Yes	
Wave to Unlock/Touch	Yes	
Auto proximity unlock	Yes	
Standards	ISO 14443A, Prox	
Certification	FCC, CE, ISSED/IC, UL294, IP65	
Environmental	IP65	
Dimensions	With standard brack, no back plate, on gang box: 11 x 12 x 1.2 cm	4.4 x 18.4 x 2.4 cm
Installation Options	Flush mounted with US gang box, surface mounted on wall, surface mounted with EU gang box	Surface mounted on wall or door frame

Key features



Modern design seamlessly blends into or upgrades the aesthetics of any entry



Indoor/outdoor design



Supports auxiliary Wiegand readers connected through the Avigilon reader



Functions seamlessly with the mobile app, available on iOS and Android



Works with Smart Watches



Supports remote unlocking with user-level privileges



Supports PIN functionality



Supports two-factor authentication (2FA) & multi-factor authentication (MFA)

Learn more




Standard



Mullion





Avigilon Embedded USB smart reader







The Avigilon Embedded USB Smart Reader combines the functionality of a USB printer reader, desktop enrollment reader and embedded module into one device. The reader supports multiple touchless access methods, including Wave to Unlock, in-app and remote unlocks, and unlocking via a smart watch.



Specifications

MODEL NAME	AVIGILON EMBEDDED USB SMART READER
Part Number	OP-R2X-EMBD
Card compatibility	Openpath DESFire EV3
	MIFARE Classic/DESFire/Ultralight (ISO14443A) CSN
	Openpath Proximity
	HID proximity
	LenelProx
Security	Encrypted communications between mobile app and controller
	Fully encrypted communication between Openpath key cards and reader
	Eliminate threat of copying or cloning Openpath key cards
	Includes tamper resistant secure storage
System Compatibility	Reader works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app
	Reader works with legacy access control systems via Mobile Gateway option
Cloud Management	Yes
Form	Mini
Frequency	125 kHz, 13.56 MHz
Openpath Bluetooth	Yes
NFC	Yes
Wave to Unlock/Touch	Yes
Auto proximity unlock	Yes
Standards	ISO 14443A, Prox
Certification	CE, FCC, IC, IEC, IMDA, IP65, MOC, OFCA, SDPPI, SRRC, TDRA, UKCA, UL, ULC, RCM, WPC
Environmental	Indoor use only
Dimensions	With all tabs intact: 4.6 x 10.2 x 1.8 cm With outer tabs removed: 4.6 x 8.9 x 1.8 cm With all tabs removed: 4.6 x 7 x 1.8 cm Outer mounting hole pitch: 9.7 cm
Installation Options	Single gang box, embedded into a wall, inside turnstiles and elevators, or used at a desk or printer

Key features


-  Snap-off brackets support multiple mounting applications
-  USB port supports enrollment reader and secured printing functionality
-  Small size fits in turnstiles, elevators, kiosks and other embedded applications
-  Supports auxiliary Wiegand readers connected through the Avigilon reader
-  Functions seamlessly with the mobile app on Android and iOS
-  Works with Smart Watches
-  Supports remote unlocking with user-level privileges
-  Lifetime warranty

Avigilon Embedded USB Smart Reader Accessories

PRODUCT NAME	PART NUMBER
Desktop Bracket for Embedded USB Smart Reader	OP-RSC-DESK

Learn more





Avigilon Video Reader Pro

The Avigilon Video Reader Pro combines the heightened security of a built-in high-resolution camera with the form factor of a mullion door reader. Automatically associate video footage with access events, alerts and motion, and visually monitor entries in the mobile app and the Control Center.



Specifications

MODEL NAME	AVIGILON VIDEO READER PRO
Part Number	OP-VID-PRO-RDR
Card compatibility	Openpath DESFire EV3
	MIFARE Classic/DESFire/Ultralight (ISO14443A) CSN
	Openpath Proximity
	HID proximity
Security	LenelProx
	Encrypted communications between mobile app and controller
	Fully encrypted communication between Openpath key cards and reader
	Eliminate threat of copying or cloning Openpath key cards
System Compatibility	Includes tamper resistant secure storage
	Video Reader Pro works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app
	Video Reader Pro works with legacy access control systems via Mobile Gateway option and Standalone Mode
	Video Reader Pro works with third-party VMS software via open video standards
Cloud Management	Yes
Form	Mullion
Frequency	125 kHz, 13.56 MHz
Openpath Bluetooth	Yes
NFC	Yes
Wave to Unlock/Touch	Yes
Auto proximity unlock	Yes
Standards	ISO 14443A, Prox
Certification	FCC, UL 294, CE
Environmental	IP65
Dimensions	With Mullion bracket: 155 x 47 x 37 mm (6.1 x 1.85 x 1.45 in)
	With Standard bracket: 187 x 78 x 37 mm (7.36 x 3.07 x 1.45 in)
Installation Options	Weight: 287 g (0.63 lbs)
	Surface mounted on wall, mounted on gang box, or installed inside metal enclosure

Key features



High resolution built-in camera records entry activity



Adjustable camera angle for optimal footage



Supports Triple Unlock technology



Can connect to third-party legacy access control panel



Indoor/outdoor design



NDAA compliant




5 year warranty

Video

Image sensor	1 / 2.5" 5MP CMOS
Resolution	5MP (2592 x 1944) recording at 25 fps
Compression	H.264, MJPEG
Bitrate	CBR, VBR, MBR
Focal Length	2.8mm (F1.6)
Field of View	Horizontal: 109°, Vertical: 81°, Diagonal: 136°
Min. Illumination	Color: 2.5 lux, B/W: 0.0 lux (IR LED on)
IR Range	9m (29.53ft)
Wide Dynamic Range	HDR (87dB)

Learn more





Avigilon Video Intercom Reader Pro

The Video Intercom Reader Pro combines all your front door security devices to provide live video, two-way audio, smart call routing and reliable touchless access.



Specifications

MODEL NAME	AVIGILON VIDEO INTERCOM READER PRO
Part Number	OP-VID-PRO-INT
Card compatibility	Openpath DESFire EV3
	MIFARE Classic/DESFire/Ultralight (ISO14443A) CSN
	Openpath Proximity
	HID proximity
Security	LenelProx
	Encrypted communications between mobile app and controller
	Fully encrypted communication between Openpath key cards and reader
	Eliminate threat of copying or cloning Openpath key cards
System Compatibility	Includes tamper resistant secure storage
	Video Intercom Reader Pro works with Alta Access Control, including Avigilon controllers, Alta Access software, and mobile app
	Video Intercom Reader Pro works with legacy access control systems via Mobile Gateway option and Standalone Mode
	Video Intercom Reader Pro works with third-party VMS software via open video standards, including ONVIF and RTSP
Cloud Management	Yes
Form	Mullion
Frequency	125 kHz, 13.56 MHz
Openpath Bluetooth	Yes
NFC	Yes
Wave to Unlock/Touch	Yes
Auto proximity unlock	Yes
Standards	ISO 14443A, Prox
Certification	FCC, UL 294, CE
Environmental	IP65
Dimensions	With Mullion bracket: 204 x 47 x 37 mm (8.02 x 1.85 x 1.45 in)
	With Standard bracket: 235 x 78 x 37 mm (9.25 x 3.07 x 1.45 in) Weight: 384 g (0.85 lbs)
Installation Options	Surface mounted on wall, mounted on gang box, or installed inside metal enclosure

Key features


-  High resolution built-in camera records entry activity
-  Smart intercom interface supports multiple configurations
-  Initiate and accept calls from the Control Center or Openpath app
-  Supports Triple Unlock technology
-  Can connect to third-party legacy access control panel
-  Indoor/outdoor design
-  NDAA/TAA compliant
-  Five year warranty

Learn more



Video and audio

Image sensor	1 / 2.5" 5MP CMOS
Resolution	5MP (2592 x 1944) recording at 25 fps
Compression	H.264, MJPEG
Bitrate	CBR, VBR, MBR
Focal Length	2.8mm (F1.6)
Field of View	Horizontal: 109°, Vertical: 81°, Diagonal: 136°
Min. Illumination	Color: 2.5 lux, B/W: 0.0 lux (IR LED on)
IR Range	9m (29.53ft)
Wide Dynamic Range	HDR (87dB)
Audio Streaming	Two-way, full duplex with echo and noise cancellation
Audio Input/Output	Built-in microphone array, omni-directional; Built-in speaker
Audio Encoding	G.711u, G.711a, G.726



Avigilon Core Series Smart Hubs

The Avigilon Core Series Smart Hub is a modular access control unit that supports Avigilon Smart Readers. The Core Series Smart Hub features the Access Control Core (OP-ACC), expansion boards, and uses RS-485 wiring to connect to the Smart Readers and is powered by a built-in power supply.



Specifications

MODEL NAME	12/24V 4-DOOR CORE SERIES SMART HUB	12/24V 8-DOOR CORE SERIES SMART HUB	24V ELEVATOR CORE SERIES SMART HUB
Part Number	SYS-4ENT-DVE1	SYS-8ENT-DVE2	20ENT-SYS-24V
Operate Voltage/Power	12-24VDC 1.25A @ 24VDC (with 4 Avigilon Readers) 0.7A @ 24VDC (with no readers)	12-24VDC 3.3A @ 12VDC (with 8 Avigilon Readers) 1.3A @ 12VDC (with no readers) 1.8A @ 24VDC (with 8 Avigilon Readers) 0.7 @ 24VDC (with no readers)	12-24VDC 12V: 825mA Max (with 2 Avigilon Readers) 12V: 325mA Max (with no readers) 24V: 470mA Max (with 2 Avigilon Readers) 24V: 190mA Max (with no reader)
Door Relays	4 relays, 5A @ 24VDC (resistive)	8 relays, 5A @ 24VDC (resistive)	16 elevator relays, 1A @ 24VDC, 0.3A @ 110VAC
Auxiliary Relays	2 relays, 1A @ 24VDC	4 relays, 1A @ 24VDC	N/A
Avigilon Readers	Up to 4 Avigilon Readers	Up to 8 Avigilon Readers	Up to 2 Avigilon Readers
REX and Contact Sensors	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	8 REX and 8 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input
Auxiliary Inputs	4 input lines with EOL monitoring		N/A
Enclosure Size	14" H, 12" W, 4.5" D (356 x 305 x 114 mm)	20 x 16 x 4.5" (508 x 406 x 114 mm)	14" H, 12" W, 4.7" D (356 x 305 x 114 mm)
Weight	Approx 10 lbs (4.5 kg)	Approx 20 lbs (9 kg)	Approx 45 lbs (20.41 kg)
Operating Temperature	32° to 122°F (0° to 50°C)		
Operating Humidity	5% to 85% relative, non-condensing		
Communication Ports	10/100 baseT Ethernet, USB port		
Backup Battery	Use two 12VDC sealed lead acid (SLA) or gel cell batteries in series		
Compliance	FCC, IC, CE, RCM, UL 294		

Key features

Internet connectivity to the Avigilon Alta access control cloud for system management and communication

Stores all cloud configurations locally in order to remain fully functional in the event of an Internet outage

Uses industry standard RS-485 signaling to communicate with Avigilon readers over CAT 5/6 wiring

Plug and play design allows for easy expansion and customization

Includes port interfaces for Relays, Avigilon Readers, REX Sensors, and Contact Sensors

Auxiliary relays and configurable auxiliary input pins provide extra outputs and allow additional sensors or Wiegand devices

EOL monitoring with single or double termination on all REX, Contact, and Auxiliary inputs supported with user-installed 1k resistors

Ships with LifeSafety Power enclosure for security and easy wall mounting

Learn more

4-Door

8-Door

Elevator

Avigilon Core Series Large Capacity Smart Hubs

The Avigilon Core Series Smart Hub is a modular access control unit that supports Avigilon Smart Readers. The Core Series Smart Hub features the Access Control Core (OP-ACC), expansion boards, and uses RS-485 wiring to connect to the Smart Readers and is powered by a built-in power supply. The Large Capacity Smart Hubs feature more room for wiring, and an aluminum backplate for easier installation.



Specifications

MODEL NAME	12/24V 8-DOOR CORE SERIES LARGE CAPACITY SMART HUB	12/24V 16-DOOR CORE SERIES LARGE CAPACITY SMART HUB
Part Number	SYS-8ENT-DVE4	SYS-8ENT-DVE6
Operate Voltage/Power	12-24VDC 1.8A @ 24VDC (with 8 Avigilon Readers) .07 @ 24VDC (with no readers)	12-24VDC 3.6A @ 24VDC (with 16 Avigilon Readers) 1.4A @ 24VDC (with no readers)
Door Relays	8 door relays, 5A @ 24VDC (resistive)	16 relays, 5A @ 24VDC (resistive)
Auxiliary Relays	4 auxiliary relays, 1A @ 24VDC	8 relays, 1A @ 24VDC
Avigilon Readers	Up to 8 Avigilon Readers	Up to 16 Avigilon Readers
REX and Contact Sensors	8 REX and 8 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	16 REX and 16 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input
Auxiliary Inputs	4 input/output lines with EOL monitoring	8 input/output lines with EOL monitoring
Enclosure Size	24" H x 20" W x 6.72" D (610 x 508 x 171 mm)	30" H x 23" W x 6.72" D (762mm x 584mm x 171 mm)
Weight	Approx 25 lbs (11.33 kg)	Approx 45lbs (20.41 kg)
Operating Temperature	32° to 122°F (0° to 50°C)	
Operating Humidity	5% to 85% relative, non-condensing	
Communication Ports	10/100 baseT Ethernet, USB port	
Backup Battery	Use two 12VDC sealed lead acid (SLA) or gel cell batteries in series	
Compliance	CE, IC, FCC, UL294	

Key features

- Internet connectivity to the Avigilon Alta access control cloud for system management and communication
- Stores all cloud configurations locally in order to remain fully functional in the event of an Internet outage
- Uses industry standard RS-485 signaling to communicate with Avigilon readers over CAT 5/6 wiring
- Large capacity and plug and play design allows for easy expansion and customization
- Includes port interfaces for Relays, Avigilon Readers, REX Sensors, and Contact Sensors
- Auxiliary relays and configurable auxiliary input pins provide extra outputs and allow additional sensors or Wiegand devices
- EOL monitoring with single or double termination on all REX, Contact, and Auxiliary inputs supported with user-installed 1k resistors
- Ships with LifeSafety Power enclosure for security and easy wall mounting

Learn more




8-Door



16-Door





Avigilon Single Door Controller


The Avigilon Single Door Controller is an access control unit that supports up to two entries and two Avigilon Smart Readers. The Controller securely makes all entry decisions and can be configured via Bluetooth using the Alta Admin App.





Specifications


MODEL NAME		AVIGILON SINGLE DOOR CONTROLLER	
Part Number		OP-CR-SDC	
Operate Voltage/Power	Operating Voltage	12-24VDC	
	Output Ratings	Power Out can supply up to 100mA @ 12V or 50mA @ 24V	
	2 reader ports, max power output	250mA @ 12V each	
	2 relays, max power output	PoE: Max 3W combined output (250mA @ 12V, 125mA @ 24V) PoE+: Max 9W combined output (750mA @ 12V, 375mA @ 24V)	
Door Relays		2 relays, 2A @ 24VDC (resistive)	
Avigilon Readers		Up to 2 Avigilon Readers	
Wiegand Readers		Up to 2 Wiegand Readers (if no Avigilon Readers)	
REX and Contact Sensors		2 REX Sensors, nominal 5VDC, 1kohm to each input (resistors built into Controller) 2 Contact Sensors, nominal 5VDC, 1kohm to each input (resistors built into Controller)	
Tamper Sensor		Detects tamper events when front cover is removed	
Enclosure Size		5.6 x 5.6 x 1.65 in (14.2 x 14.2 x 4.2 cm)	
Weight		12.7 oz (360 g)	
Operating Temperature		32° to 122°F (0° to 50°C)	
Operating Humidity		5% to 85% relative, non-condensing	
Communication Ports		10/100 baseT Ethernet, USB port	
Backup Battery		On external supply or PoE injector, use two 12VDC sealed lead acid (SLA) or gel cell batteries in series	
Certifications		CE, IC, FCC, RCM, UKCA, UL294, UL2043, WEEE	


Key features


- 


Internet connectivity to the Avigilon Alta access control cloud for system management and communication
- 


Stores all cloud configurations locally in order to remain fully functional in the event of an Internet outage
- 

Uses industry standard RS-485 signaling to communicate with Avigilon readers over CAT 5/6 wiring
- 

Includes port interfaces for 2 Relays, 2 Avigilon Readers, 2 Wiegand Readers, 2 REX Sensors, and 2 Contact Sensors
- 

Includes removable contact terminal blocks for convenient wiring
- 

Physical switches to select relays to be dry or wet (12V or 24V)
- 

EOL monitoring with single or double termination on all REX, contact, and configurable inputs
- 


WiFi-enabled: Supports 2.4 GHz and 5 GHz connections

Avigilon Single Door Controller Accessories

PRODUCT NAME	PART NUMBER
PoE/PoE+ Injector	OP-PI-30W

Learn more





Avigilon Access Control Core








The Avigilon Access Control Core works with Avigilon expansion boards to securely make all entry decisions. It can support up to 2 expansion boards via USB and supports wireless configuration through the Alta Admin App.



Specifications


MODEL NAME	AVIGILON ACCESS CONTROL CORE
Part Number	OP-CR-ACC
	12-24VDC 0.7A @ 12VDC 0.4A @ 24VDC
Operate Voltage/Power	
Dimensions	2.3 x 3.5 in (5.84 x 8.89 cm)
Weight	2 oz (57 g)
Operating Temperature	32° to 122°F (0° to 50°C)
Operating Humidity	5% to 85% relative, non-condensing
Interface Ports	0/100 baseT Ethernet, 4 USB ports
Backup Battery	CR2032 3V, replace every two years
Compliance	CE, IC, FCC, R0HS, UKCA, UL, WEEE

Key features

-  Internet connectivity to the Avigilon Alta access control cloud for system management and communication
-  Stores all cloud configurations locally in order to remain fully functional in the event of an Internet outage
-  Plug and play design allows for easy expansion and customization
-  Supports up to 16 entries via 2 Openpath expansion boards
-  Supports 4-Port, 8-Port expansion boards and 16-Port I/O board
-  Supports wireless configuration via the Alta Admin App using Bluetooth
-  Lifetime warranty

Learn more





Avigilon Expansion Boards

The Avigilon Expansion Boards are an access control board (no enclosure, no power supply) that connects to the Avigilon Access Control Core (OP-ACC) and supports entries and Avigilon Smart Readers. The Expansion Boards works with the Access Control Core to securely make all entry decisions.



Specifications

MODEL NAME	AVIGILON 4-PORT BOARD	AVIGILON 8-PORT BOARD	AVIGILON 16 I/O ELEVATOR BOARD
Part Number	OP-EX-4E	OP-EX-8E	OP-16EM
Operate Voltage/Power	Must be used with Avigilon Access Control Core 12-24VDC 5A @ 12VDC, 0.3A @ 24VDC	Must be used with Avigilon Access Control Core 12-24VDC .6A @ 12VDC 0.3A @ 24VDC	12-24VDC 12V: 825mA Max (with 2 Avigilon Readers) 12V: 325mA Max (with no readers) 24V: 470mA Max (with 2 Avigilon Readers) 24V: 190mA Max (with no readers)
Relays	4 door relays, 5A @ 24VDC (resistive) 2 auxiliary relays, 1A @ 24VDC	8 door relays, 5A @ 24VDC (resistive) 4 auxiliary relays, 1A @ 24VDC	16 relays, 60VDC Max 24VDC, 1A (resistive) 125VAC, 0.5A (resistive)
Avigilon Readers	Up to 4 Avigilon Readers	Up to 8 Avigilon Readers	Up to 2 Avigilon Readers
REX and Contact Sensors	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	8 REX and 8 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input	4 REX and 4 contact sensor inputs with EOL monitoring, nominal 5VDC, 1kohm to each input
Auxiliary Inputs	4 input lines with EOL monitoring		N/A
Enclosure Size	4.5 x 4.9 in (11.5 x 12.5 cm)	4.5 x 8.75 in (11.5 x 22.5 cm)	Approx 5.25 x 3.5 in (13.34 x 9.04 cm)
Weight	4.3 oz (122 g)	4.3 oz (122 g)	N/A
Operating Temperature	32° to 122°F (0° to 50°C)		
Operating Humidity	5% to 85% relative, non-condensing		
Interface Ports	USB port, Expansion port		USB Port
Backup Battery	Use one or two 12VDC sealed lead acid (SLA) or gel cell batteries based on power supply and system requirements		N/A
Compliance	E, FCC, IC, UL 294, RCM, UKCA		FCC, UL 294, CE

Key features

- Uses industry standard RS-485 signaling to communicate with Avigilon readers over CAT 5/6 wiring
- Plug and play design allows for easy expansion and customization
- Includes port interfaces for Relays, Avigilon Readers, REX Sensors, and Contact Sensors
- Signal relays and configurable auxiliary input pins provide extra outputs and allow additional sensors or Wiegand devices
- EOL monitoring with single or double termination on all REX, Contact, and Auxiliary inputs supported with user-installed 1k resistors
- Includes removable contact terminal blocks for convenient wiring
- Supports wireless configuration via the Alta Admin App using Bluetooth
- Lifetime warranty

Learn more





Avigilon Alta Wireless Lock Integrations

Schlage wireless locks are ideal for interior and low-traffic spaces where installing and maintaining a full door entry system would be cost-prohibitive. The Avigilon Alta integration is easy to set up with a mobile device and no wiring or Avigilon hardware is required, and provides a complete, secure access control experience across any size deployment.

Specifications



SCHLAGE LEB
WIRELESS LOCK



SCHLAGE NDEB
WIRELESS LOCK



SCHLAGE CONTROL
SMART LOCK



ENGAGE GATEWAY

MODEL NAME

Part Number

Allegion LEB

Allegion NDEB

Allegion ControlL

OP-LOCK-GW

Key features



Cost effective and scalable



One contactless credential for all your doors



Combined security monitoring




Native support for bluetooth credentials



Support for No-Tour Mode

Learn more





Avigilon Alta Low Frequency (125 kHz) Credentials

The Avigilon Access Low Frequency Credentials are ideal for supporting legacy Wiegand-based access control systems.

Specifications

MODEL NAME	AVIGILON ALTA PROXIMITY CARDS	AVIGILON ALTA PROXIMITY FOBS
Part Number	OP-ACL-10	OP-KFL-10
Form Factor	Solid/repunched	Key ring
Format	26-bit (H10301)	
Compatibility	Avigilon Low Frequency Readers Avigilon Smart Reader v2 Avigilon Pro Series Readers Allegion Schlage NDEB and LEB Wireless Locks	

Avigilon Alta High Frequency (13.56 MHz) Credentials

The Avigilon Access Low Frequency Credentials are ideal for high security applications. These high frequency cards and fobs offer additional security against cloning and protects card data confidentiality.

Specifications

MODEL NAME	AVIGILON ALTA DESFIRE EV3 CARDS	AVIGILON ALTA DESFIRE EV3B FOBS
Part Number	OP-ACH-EV3P10	OP-KFH-EV3B-10
Form Factor	Solid/repunched	Key ring
Format	ISO14443A-4	SO 14443 DESFire Series
Compatibility	Avigilon High Frequency Readers Avigilon Smart Reader v2 Avigilon Pro Series Readers Allegion Schlage NDEB and LEB Wireless Locks	

Key features



Supports custom badge printing

Learn more





For more information, visit [avigilon.com](https://www.avigilon.com)



AVIGILON™

© 2024, Avigilon Corporation. All rights reserved. MOTOROLA, MOTO, MOTOROLA SOLUTIONS, and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. 10-2024 [JS19]