



# *EDGE-5*

Managed Air-Conditioned MDC



We engineer for a sustainable tomorrow.


## Contents

Why edge compute?	2
Rapid deployment MDC	3
Features and benefits	4-5
Specification, dimensions and performance	6-7
Dimensional Drawings	8
EDGE Management System EMS	9
Air ducting kit option and Side Venting Kit	10
Extra depth extension kit	11
EDGE Pack options	11

## Why edge compute?

In our digital age more devices are connected to the internet utilising cloud based storage. The number of devices and users continue to increase which puts a strain on bandwidth causing latency.

This can be done in an environment other than a traditional data room thereby saving real estate and comms/data room build expense.

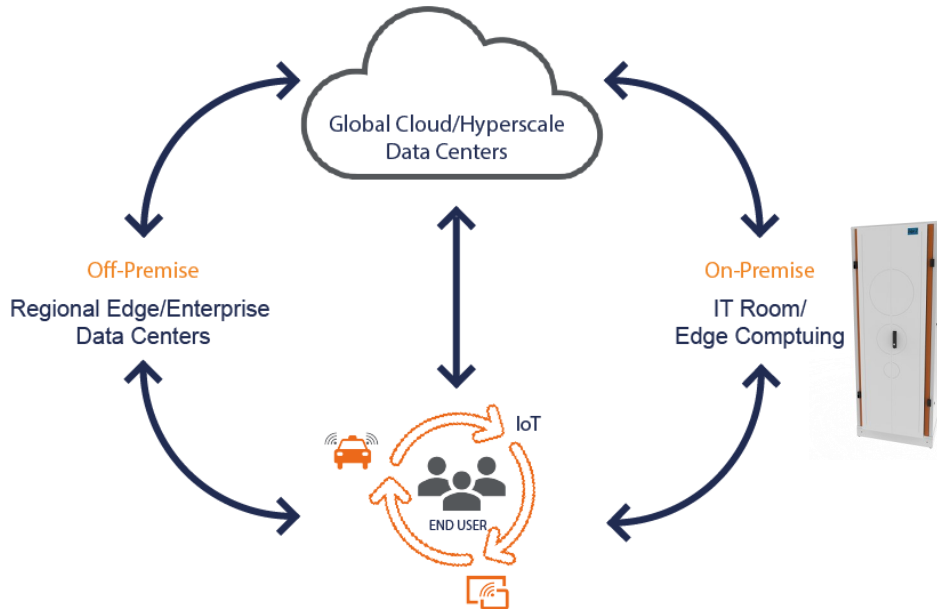

The reduction in user bandwidth availability and the increase in latency could have dire consequences depending upon the application being used.

USystems offer a broad range of self contained intelligent modular systems called *EDGE* to house localised computing, which can be deployed directly into factories, warehouses, offices, M2M, multiple users, businesses etc., either as a standalone cabinet or bayed together in a dedicated room.

This latency and decrease in bandwidth can be overcome by introducing on-premise edge computing. This allows the user to access immediate computer power locally whilst using the cloud simply to store information.

## Rapid deployment Micro Data Centre

The *EDGE* range is fully factory configured to enable rapid deployment and has models to suit most applications and environments.

One of these being the *EDGE-5*, specifically designed for housing localised computing and network equipment in a standalone cabinet in a dedicated room. It is a self-contained air-conditioned MDC which is therefore an ideal solution for projects requiring active cooling without the use of external plant.

The 2.5kW air-conditioning system is inverter driven and will maintain the required internal cabinet temperature even when sited in a room ambient of 35°C/95°F.

Peace of mind is provided by an on board environmental and optional security monitoring system. Real time alarms and alerts which can be viewed via the WebUI will notify authorised personnel via email alarms relating to any issues with the cabinet.

Meaning you know what's going on and can monitor who's coming and going 24/7.

Advanced configurations are available for enhanced levels of security and redundancy.

The LCD touch display on the cabinet doors will change colour if the cabinet status changes, alerts (amber) or alarm (red). It will remain blue when working correctly. Touching the display will show environmental data from each temperature/humidity sensors or in the event of an alarm what that alarm specifically is.

### Typical application spaces:

- Un-staffed offices
- IT/Comms rooms,
- Stadiums
- Warehouses
- Factories

*For safe running we recommend siting in a ventilated room up to 90°F/35°C*



## Features and benefits



**Security Camera  
(optional upgrade)**

*Captures video and images  
automatically when the door  
opens*



**EDGE Management System EMS**

*Providing real time environmental  
monitoring*




**Cable tray**

*Ensure best cabling practice*




**Dynamic load  
750kg**

**Static load  
1500kg**



**Plinth corners, heavy duty  
castors and levelling feet**

*For safe rapid deployment*



**Cooling capacity**

*From 500w to 2.5kW per cabinet*

## Features and benefits cont.



### LCD display

*Displaying alarm state and major monitoring points*




### Cable entry glands

*Allows for easy and flexible cable egress through the rack top*




### Clear glass door

*Keep an eye on equipment without the need to open the door*




### Air conditioning unit

*Slimline and minimal maintenance*



### Plinth panels

*For that finishing touch*



### Swing handle and four point locking

*Providing high security—electronic upgrade is also available*



## Specification

Cabinet useable height	36U	42U
Overall height including plinth and levelling feet	78.31"/1989mm	88.8"/2255mm
Width	31.5"/800mm	
Depth	47.24"/1200mm	
Maximum static load capacity on plinth & adjustable feet	3307lbs/1500kg	
Dynamic load*	1654lbs/750kg	

## Materials and finish

### Frame

1.5mm CR4 steel

### Glass door

1.0mm, 1.2 & 2.0mm CR4 steel 4mm clear toughened glass

### Side panels and top cover

1.2mm CR4 steel

### Mounting angles

2.0mm CR4 steel


### Cooling

2.5kW slimline air conditioning unit


### Intelligence

Edge Management System

### Semi gloss powder coat



Light grey  
RAL 7035



Black RAL 9005  
Option with  
extended lead



Orange RAL  
2009

Accents only


**Compliance statement:** Manufactured to IEC 602973 and EIA STD 310 for panels and racks housing electronic equipment

\*Dynamic Load Rating is the total rolling mass of the rack and includes the rack frame, cladding and any fitted equipment and accessories and is subject to the load being evenly distributed at 20U height and below. Dynamic load relates to the movement of a rack within the same data centre on a smooth floor clear of any obstacles. Not suitable for transportation on a vehicle when loaded to this weight.

## How it works

The EDGE-5 provides a safe constant working temperature and will deal with a working load of between 500w to 2.5kW to protect and prolong the life of your IT equipment. The EDGE-5 is an ideal solution for reducing energy costs and keeping temperatures controlled inside the cabinet.


The slimline air-conditioning unit will speed up and slow down as and when the heat load dictates, removing the need for unnecessary over use of the equipment

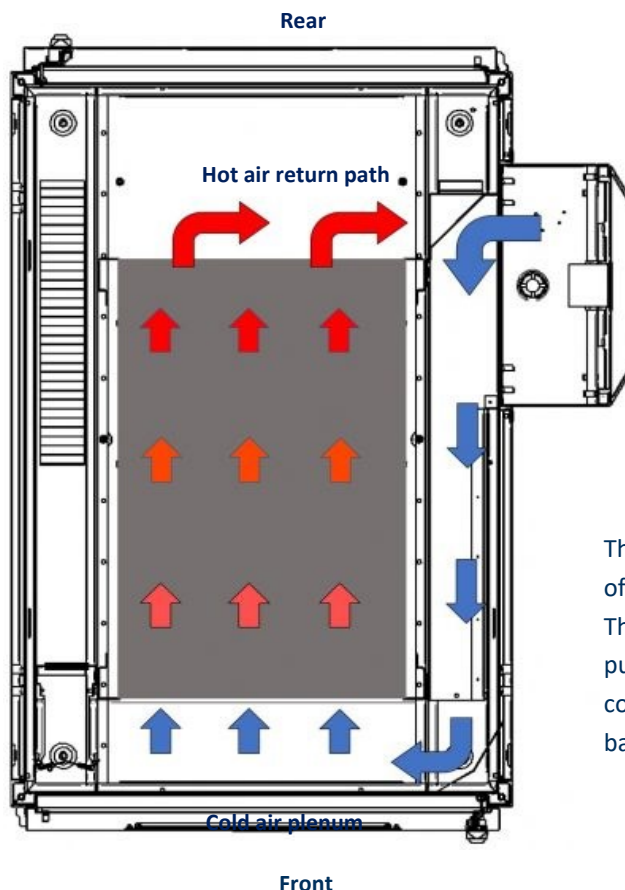

The AC unit delivers a constant stream of cold air to the front of the cabinet. The returning hot exhaust air is then pulled over a heat exchanger before continuing through a dedicated channel back to the front of the cabinet.

### Air Conditioning Unit

Capacity options (35°C room and 35°C cabinet temperature)	R134a Refrigerant charge	Operating range	Unit weight	Power supply	Starting Current	Max Running Current	Fuse	Max power	System Air volume ambient / cabinet
2.55kW inverter driven system	368g	10° to 60°C 50° to 140°F	45 Kg 99 lbs	240V 50~60 Hz	8A	6.8A	10A (T)	1.55kW	680/ 500m3/h

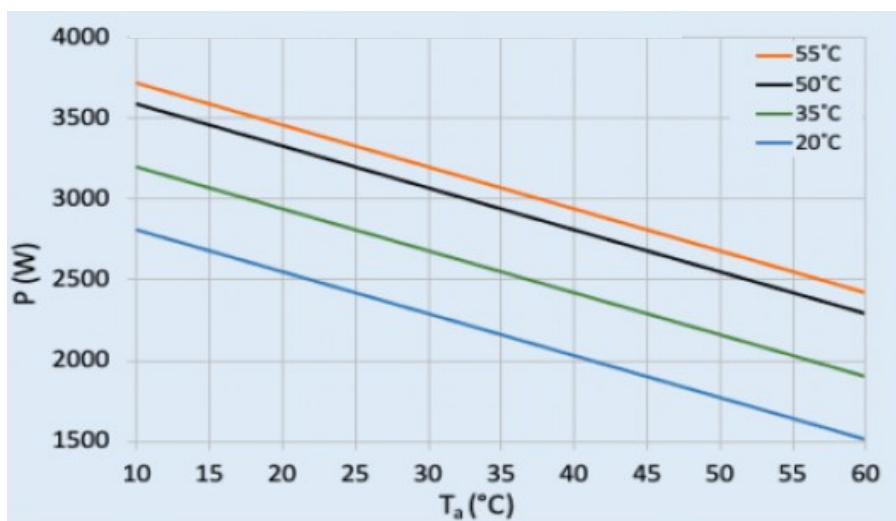

Variable cooling capacity 500 W - 2.55 kW

**Compressor:** BLDC Rotary Piston

**Refrigerant / GWP:** R134a / 1430

**Refrigerant charge:** 368 g / 13 oz.

**High / low pressure:** 32 / 6 bar

464 / 87 psig

**Temperature range:** +10°C - +60°C


**Air volume flow (system / unimpeded):** Ambient air circuit: 680 m<sup>3</sup>/h / 1000 m<sup>3</sup>/h

Cabinet air circuit: 500 m<sup>3</sup>/h

Minimum cooling capacity 500w



Front view

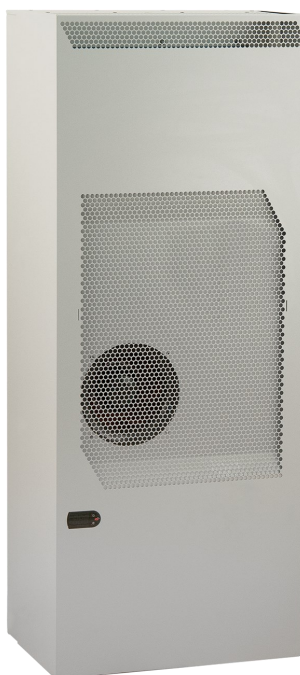

Rear view

## EDGE Management System 'EMS'

### Providing complete peace of mind


A standard feature of the EDGE-3 is the inclusion of the Edge Management System EMS controlling the 2x EC Fans and the environmental status of the cabinet with up to 4 temperature and humidity reporting and alarming if over threshold is reached.

Additional contact sensors to notify of door access. Displayed on a easy to view Webui with SNMP trap send, V1, 2 and 3 available to send out data and alarms.

### Because you need to know

Whilst it is the EMS which takes care of the energy efficient cooling, it is also the EMS which brings together the whole solution.

Alarms and alerts in real time will notify you of any issues with your cabinet. The LCD screen on the cabinet will also show an alarm status, touch will provide sensor data, fan status and contact sensor triggers.



Front View



Front View




Rear View



## EDGE Pack Options

### Intelligent power

A full suite of fully specified intelligent power strips in a variety of entry levels



### Security

A full electronic access and security system, key pad, bio metric etc.



### Uninterruptible power supplies

Protection for hardware from unexpected power disruption



### Further Documentation

For additional information, please refer to the below. Available through your USystems representative, or our central inquires line at [sales@usystems.com](mailto:sales@usystems.com)

Complete Product Range	Available at <a href="http://www.usystems.com">www.usystems.com</a>
Operations and Maintenance Manual	Please contact <a href="mailto:sales@usystems.com">sales@usystems.com</a>
Troubleshooting Guide	Please contact <a href="mailto:sales@usystems.com">sales@usystems.com</a>
Product Datasheet	Available at <a href="http://www.usystems.com">www.usystems.com</a>

# EDGE MDCs



We engineer for a sustainable tomorrow.

[www.usystems.com](http://www.usystems.com)

Available From

**MAYFLEX**  
A Sonepar Company

#### Mayflex

Excel House,

Junction Six Industrial Park,

Electric Avenue, Birmingham  
B6 7JJ

Tel: 0121 326 7557

Email: [sales@mayflex.com](mailto:sales@mayflex.com)

Web: [www.mayflex.com](http://www.mayflex.com)